

**BAKERSFIELD CITY SCHOOL DISTRICT
ROOSEVELT ELEMENTARY SCHOOL MODERNIZATION
BAKERSFIELD, KERN COUNTY, CALIFORNIA**

BID OPENING:
July 16th, 2024 at 3:00pm

Job No. 1317
Appl. No. 15-6
File No. 03-122920

ADDENDUM NO. #02

NOTICE TO CONTRACTORS FIGURING THIS WORK

You are hereby notified of the following changes in the plans and specifications, which shall take precedence over anything to the contrary therein.

- 2-1) Refer to DSA Approved Specifications, INDEX (TECHNICAL SPECS), DIVISION 02 – EXISTING CONDITIONS;
- a. ADD: Specification sections as follows and as attached to this Addendum:
02 82 00 REMOVAL OF ASBESTOS CONTAINING ROOF MATERIAL
02 82 13 ASBESTOS ABATEMENT
02 82 14 STANDARD FORMS
02 3 33 RENOVATION WITH LEAD PAINT
- 2-2) Refer to DSA Approved Drawings, Sheet No. T0.0 TITLE SHEET, SHEET INDEX & VICINITY MAP, HAZARDOUS MATERIAL REMOVAL NOTES, NOTE #8;
- a. REVISE: Specification section to be 02 82 13 ASBESTOS ABATEMENT in lieu of 02 62 00 HAZARDOUS MATERIALS ABATEMENT.
- 2-3) Refer to DSA Approved Specifications, Section 08 41 13 ALUMINUM ENTRANCE AND STOREFRONTS, PART 2 PRODUCTS, PARA. 2.02 MATERIALS, ITEM b. ENTRANCE DOORS;
- a. DELETE: Item “b” in its entirety.
- 2-4) Refer to DSA Approved Specifications, INDEX (TECHNICAL SPECS);
- a. DELETE: Specifications Section 32 31 13.03 CHAIN LINK – PRIVACY SLATS in its entirety.
 - b. DELETE: Specification Section 10 11 13.10 CHALKBOARDS AND TACKBOARDS in its entirety.
Note: This section is not listed on Index, but included within the specifications.
 - c. ADD: Specification Section 10 44 00 FIRE EXTINGUISHERS AND CABINETS as attached to this Addendum.
 - d. ADD: Specification Section 32 12 16 ASPHALTIC CONCRETE PAVING as attached to this Addendum.
 - e. ADD: Specification Section 09 68 13 TILE CARPETING as attached to this Addendum.
 - f. REVISE: In Specification Section 09 30 00 TILE WORK, PART 1.02, PARA. C. THE WORDS “... IN (E) BUILDING F TOILETS.” to read “...AS INDICATED ON PLANS.”
- 2-5) Refer to DSA Approved Drawings, Sheet No. 5.0 DOOR SCHEDULE, ROOM FINISH SCHEDULE;
- a. REVISE: Ceiling material in Rooms 104 TOILET and 105 TOILET to be “3C” in lieu of “1A”.
 - b. ADD: To Building “A”, Room “(E) STAFF DINING” and add Ceiling Material to be “1A”.
 - c. REVISE: Floor material at Room 101 HEALTH to be “1D” in lieu of “1A/1D” and base material to be “2D” in lieu of “1A/1B”.

- d. ADD: To FINISH NOTES & MATERIALS – FLOORS, FLOOR FINISH, add Note No. 4. PATCH & MATCH (E) CARPET TILE.
 - e. ADD: Floor material at Room 103 TEACHERS to be “4B” in lieu of “1A”.
 - f. REVISE: Wall finish at Rooms 401 TOILET and 402 TOILET shall be “1C/3B” in lieu of “3B”.
- 2-6) Refer to DSA Approved Drawings, Sheet Nos. A1.0 OVERALL SITE PLAN, A1.1 PARTIAL DEMO SITE PLAN and E1.00 ELECTRICAL SITE PLAN, SYMBOL LEGEND, DETAILS AND NOTES;
- a. REVISE: Trenching on East side of Buildings C & D for conduit run from Panel “PC” to Panel “PD” to be as per attached Drawing Nos. 01 and 02.
 - b. ADD: Note – District will cap any irrigation as required, Contractor to repair any irrigation lines damaged by Contractor during course of construction by their personnel.
- 2-7) Refer to DSA Approved Drawings, Sheet No. A2.3 FLOOR PLAN BUILDING “D”, PARTIAL FLOOR PLAN & DEMO PLAN, ROOMS 401 BOYS & 402 GIRLS;
- a. REVISE: Concrete slab demo and replacement as indicated per attached Drawing Nos. 03 and 04.
 - b. ADD: Keynote (215) to the interior perimeter of each room as indicated per attached Drawing No. 03.
 - c. ADD: Keynote (253) DEMO (E) CEILING FINISH to Keynote Schedule and to each room as indicated per attached Drawing No. 03.
 - d. DELETE: Keynote (245) from East wall of Room 402 as indicated per attached Drawing No 04.
- 2-8) Refer to DSA Approved Drawings, Sheet No. A2.4 FLOOR PLAN BUILDING “E” & DEMO FLOOR PLAN BUILDING “E”, (B) DEMO FLOOR PLAN BUILDING “E”, ROOMS (E) CLOSET, (E) STORAGE, (E) CLOSET;
- a. ADD: Keynote (203) DEMO (E) FLOOR FINISH to each room.
- 2-9) Refer to DSA Approved Drawings, Sheet No. E1.00 ELECTRICAL SITE PLAN, SYMBOL LEGEND, DETAILS AND NOTES;
- a. CLARIFY: SAWCUT AND PATCH as indicated at the North side of BLDG “B” shall only be at the East & West ends of the building, the area directly to the North of the building is turf.
- 2-10) Refer to DSA Approved Drawings, Sheet No. A10.2 DETAILS;
- a. ADD: Detail #2 as indicated per attached Drawing No. 05.
- 2-11) Refer to DSA Approved Drawings, Sheet No. A9.0 INTERIOR ELEVATIONS, EAST ELEVATION OF ROOM 106 CORRIDOR;
- a. REVISE: Graphic of drinking fountain to match scheduled fixture as indicated per attached Drawing No. 06.
- 2-12) Refer to DSA Approved Drawings, Sheet Nos. 6.0 PARTIAL ROOF PLAN BUILDINGS “B”, “C” & “D”, BUILDING “D” and A6.1 PARTIAL ROOF PLAN BUILDING “E”;
- a. ADD: VTR’s and roof patching as indicated per attached Drawing Nos. 07 & 08.

- 2-13) Refer to DSA Approved Drawings, Sheet Nos. P2.1 PLUMBING PLAN BUILDINGS “B & C” and P2.2 PLUMBING PLAN & DEMO PLAN Building “D”;
- a. ADD: At locations where condensate lines are tied into (E) vents of (E) sinks above the t-bar ceiling, Contractor shall demo existing wall finish and patch wall finish as required to match (E).
- 2-14) Refer to DSA Approved Drawings, Sheet No. E4.00 FA SITE PLAN, SYMBOL LEGEND, DETAILS, NOTES AND SCHEDULES;
- a. CLARIFY: FACP “A” is Owner provided, owner installed.
- 2-15) Refer to DSA Approved Drawings, Sheet No. A1.0 SITE PLAN;
- a. ADD: Ground Penetrating Radar as provided by District as indicated per attached Drawing No. 11.
- 2-16) Refer to PROJECT MANUAL BID NUMBER 22219.00-40, SECTION 01 32 13 SCHEDULING OF WORK;
- a. DELETE: This Section in its entirety.
 - b. ADD: Section 01 32 13 SCHEDULING OF WORK as attached to this addendum.
- 2-17) Refer to DSA Approved Drawings, Sheet No. E1.00 ELECTRICAL SITE PLAN, SYMBOL LEGEND, DETAILS AND NOTES,
- a. ADD: An existing 4”c for PNL PD and an existing 3.1/2” c for PNL PB are currently stubbed above grade on the face of the existing block wall that houses the existing MSB. Contractor shall extend conduits and go up and over the wall and tie into the existing MSB to provide temp power to the buildings for the modernization and add breakers to the existing MSB as indicated per attached Drawing No 09.
 - a. Add: Install the District provided MSB (next summer). This will include the demo of the existing MSB, demo of the “temp” conduits as mentioned in item 2-17a. Providing and installing conduits from pull box N40 to the MSB, which includes boring under the existing footing of the block wall, PG&E coordination and energizing.
- 2-18) Refer to DSA Approved Drawings, Sheet No. E2.20 BLDGS B, C AND D LIGHTING FLOOR PLANS AND NOTES ;
- a. ADD: At the existing classrooms in Bldgs. “B” and “C”, test all smartboards for operation, remove, store and protect during construction, reinstall and re-test for operation.
 - b. ADD: At the existing classrooms in Bldgs. “B”, “C” and “D”, test all intercom speakers, remove, store and protect during construction, reinstall in the scheduled T-bar ceiling and retest for operation.
 - c. ADD: At Bldg. “B” and “C”, in all rooms, data/intercom cabling shall be protected during Construction.
 - d. ADD: At Bldg. “D”, in all rooms intercom cabling shall be protected during construction.
 - e. ADD: At Bldg “B”, Room 206, Demo existing IDF cabinet and install District provided IDF cabinet (RE4x) . All data cabling terminations are to be either maintained and tested after IDF swap or re-terminated after IDF swap.

- f. ADD: At Bldg "C", Room 305, Demo existing IDF cabinet and install District provided IDF cabinet (RE4x) . All data cabling terminations are to be either maintained and tested after IDF swap or re-terminated after IDF swap.
- g. ADD: At Bldg. "D", demo existing data cabling that runs from (E) IDF in (E) CUSTODIAN ROOM to 404 CLASSROOM, 405 CLASSROOM, 406 CLASSROOM and 407 CLASSROOM.
- h. ADD: At Bldg "D", (E) CUSTODIAN ROOM, demo existing IDF cabinet and install District provided IDF cabinet (RE4x). Data cabling from IDF in (E) CUSTODIAN ROOM to rooms 404 CLASSROOM, 405 CLASSROOM, 406 CLASSROOM and 407 CLASSROOM shall not be included in the bid.
- i. ADD: At Bldg "D", Rooms 404,405, 406 and 407, Demo all existing wall mounted projectors and white boards.
- j. ADD: At Bldg "D", Room 408 CLASSROOM,
All data cabling shall be protected during construction
Test smartboard for operation, remove, store and protect during construction, reinstall and re-test for operation.
Remove, store, protect and reinstall (E) IDF Cabinet. All data cabling terminations are to be either maintained and tested after IDF reinstall or re-terminated after IDF reinstall.

2-19) Refer to DSA Approved Drawings, Sheet No. E2.10 BLDGS A AND E LIGHTING FLOOR PLANS AND NOTES, LIGHTING PLAN BLDG E ;

- a. ADD: At Bldg. E , in all rooms, data/intercom cabling shall be protected during Construction.
- b. ADD: At Bldg E, test all smartboards for operation, remove, store and protect during construction, reinstall and re-test for operation.
- c. ADD: At Bldg E, test all intercom speakers, remove, store and protect during construction, reinstall in the scheduled t-bar ceiling and retest for operation.

2-20) Refer to DSA Approved Drawings, Sheet No. 4.0 REFLECTED CEILING PLAN BUILDING A AND PARTIAL CEILING JOIST PLAN, ROOM (E) STAFF DINNING;

- a. ADD: Existing field discovered exposed duct work as indicated per attached Drawing No. 10. Duct work shall stay in place and be protected during construction, all scheduled work shall work around the existing duct work. Clean all registers and paint all portions of the exposed ductwork.

CONFORMANCE WITH SPECIFICATIONS


All work shall be in conformance with the specifications as they apply to work of a similar nature.



SCARCHITECT, INC.

1601 New Stine Road, Ste. 280
Bakersfield, CA 93309



Stephen J. Corbin, AIA, NCARB, LEED-AP BD+C
Architect

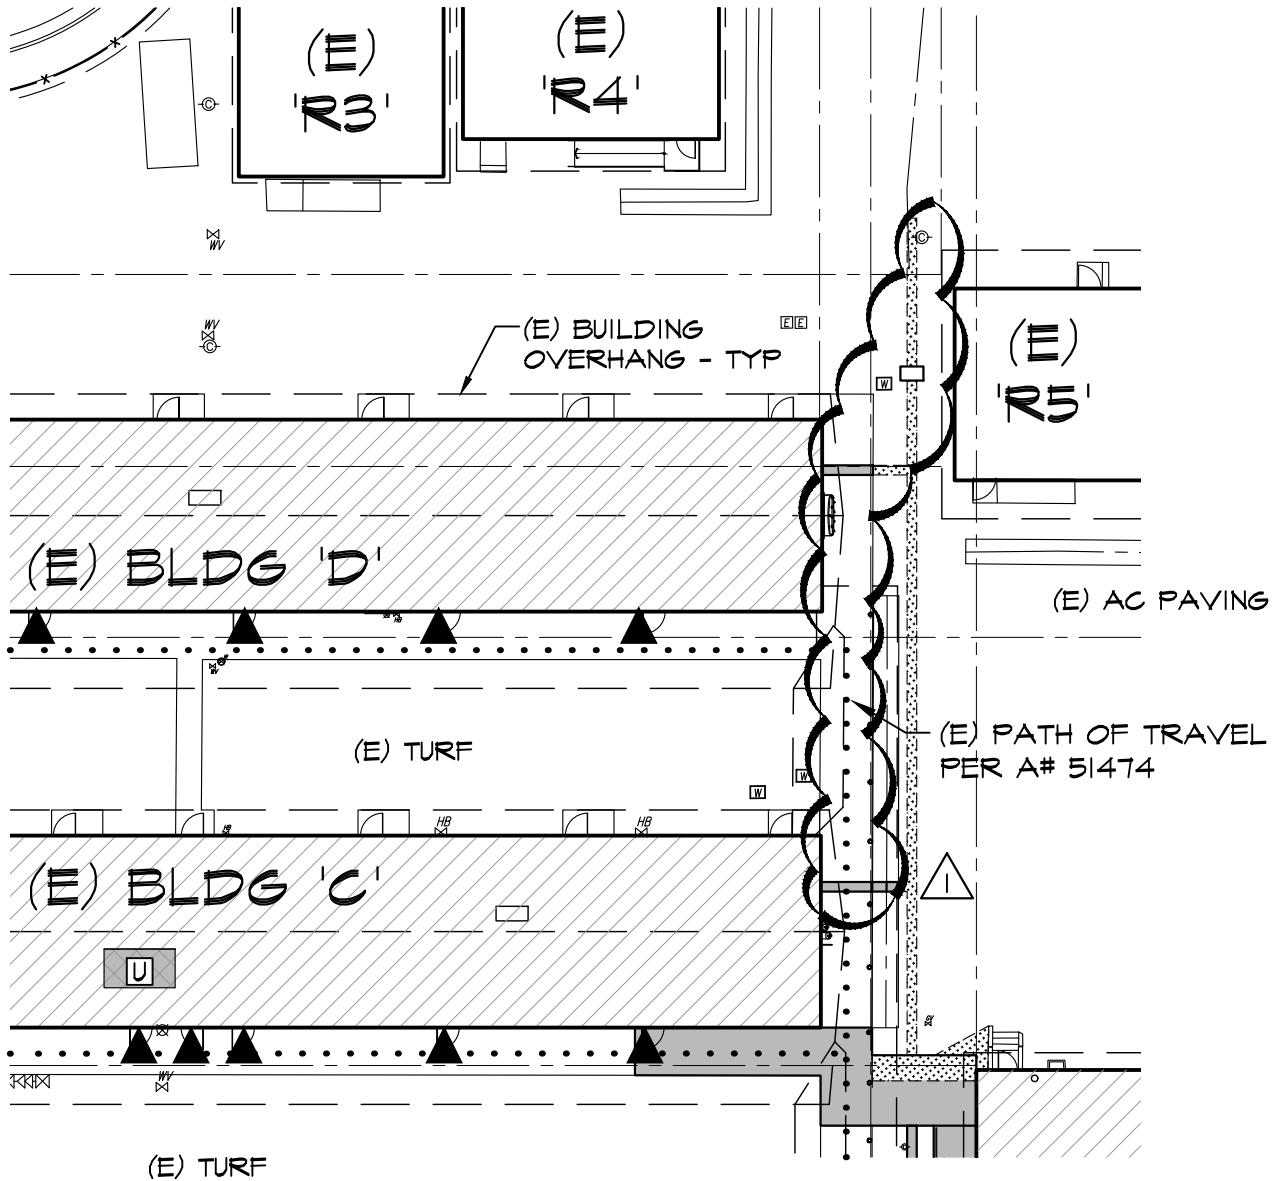

△ REVISING TRENCH FOR
ELECTRICAL CONDUIT

ITEM • 2-6a

REF. DSA APPROVED
DRAWING, SHEET A1.0



PLAN NORTH

PARTIAL SITE PLAN

SCALE : 1" = 30'-0"



1601 NEW STINE RD., STE 280
BAKERSFIELD, CA 93309
FAX: (661) 397-4378
PH: (661) 397-4377





ADDENDUM NO. 02		JOB NO: 1317	DATE: 6/17/24
ROOSEVELT ELEMENTARY SCHOOL MODERNIZATION 2324 VERDE STREET BAKERSFIELD CITY SCHOOL DISTRICT BAKERSFIELD, KERN COUNTY, CALIFORNIA		APPL#: 03-122920	FILE#: 15-6
		DWG NO: 01	

△ REVISING TRENCH FOR
ELECTRICAL CONDUIT

ITEM • 2-6a

REF. DSA APPROVED
DRAWING, SHEET A1.1

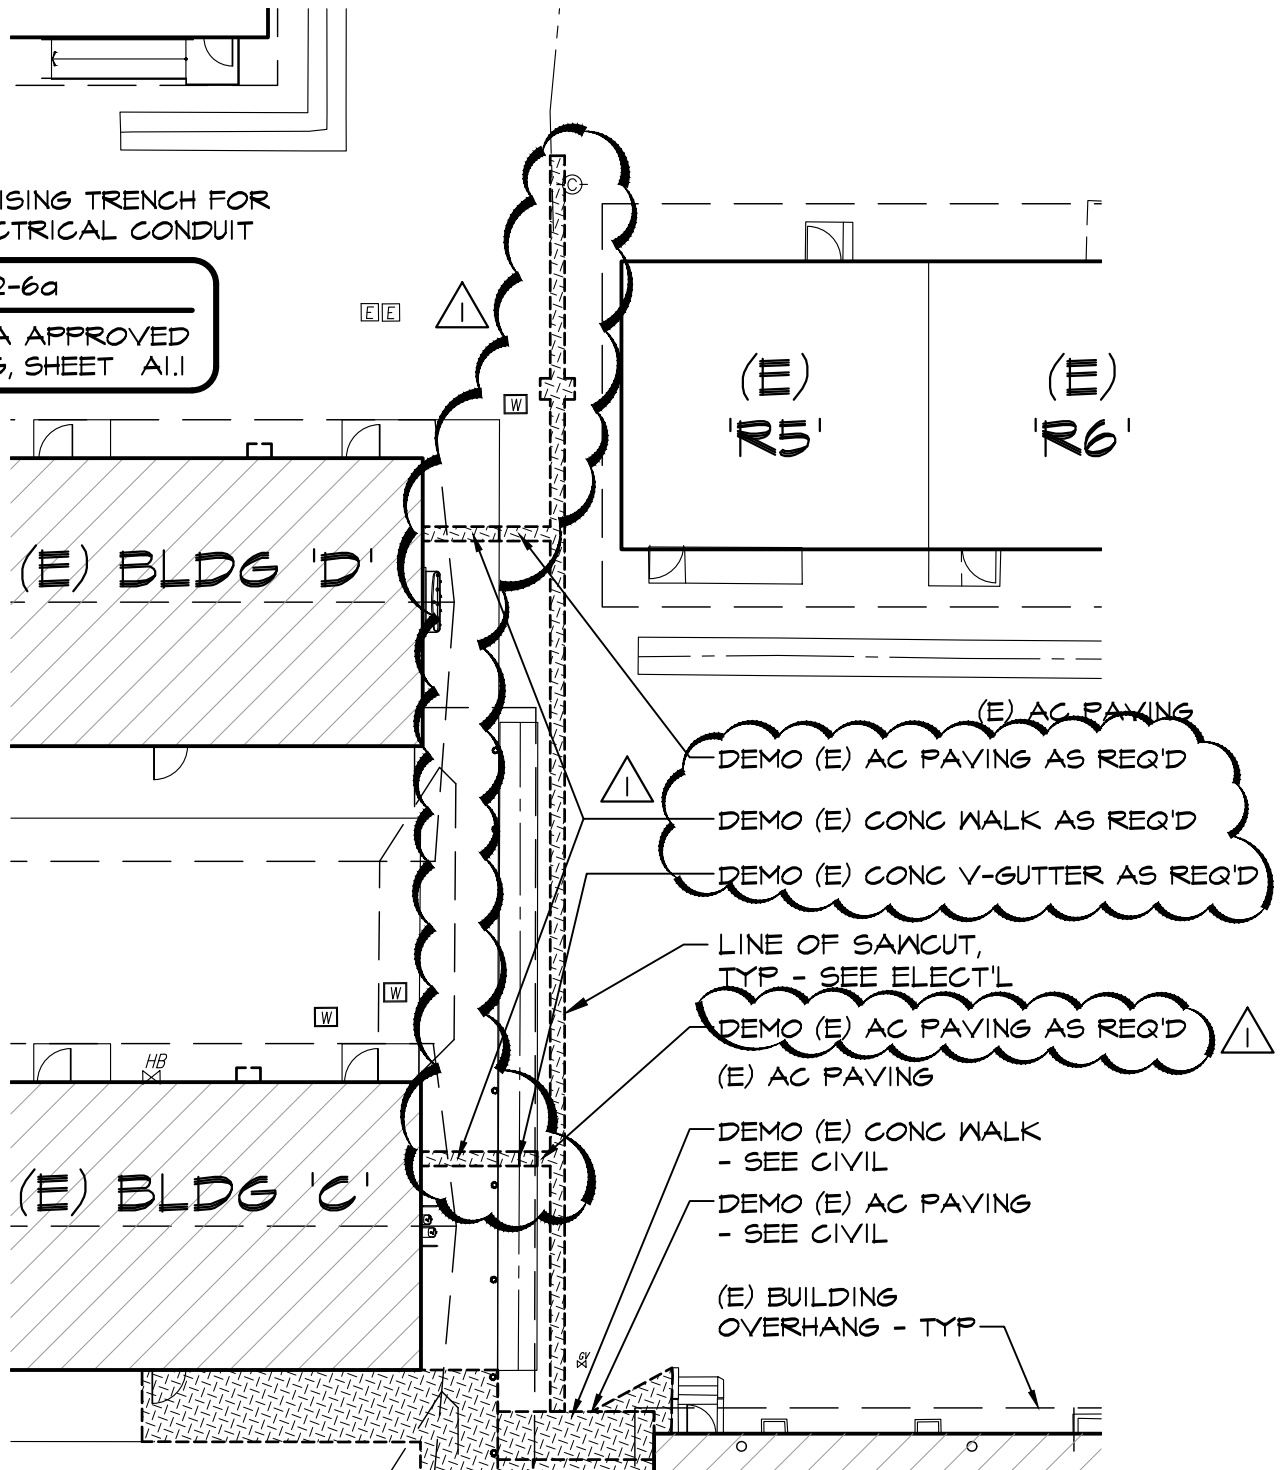

PLAN NORTH

PARTIAL DEMO SITE PLAN



SCALE : 1" = 20'-0"



1601 NEW STINE RD., STE 280
BAKERSFIELD, CA 93309
FAX: (661) 397-4378
PH: (661) 397-4377



ADDENDUM NO. 02		JOB NO: 1317	DATE: 6/17/24
ROOSEVELT ELEMENTARY SCHOOL MODERNIZATION 2324 VERDE STREET BAKERSFIELD CITY SCHOOL DISTRICT BAKERSFIELD, KERN COUNTY, CALIFORNIA		APPL#: 03-122920	FILE#: 15-6
		DWG NO: 02	

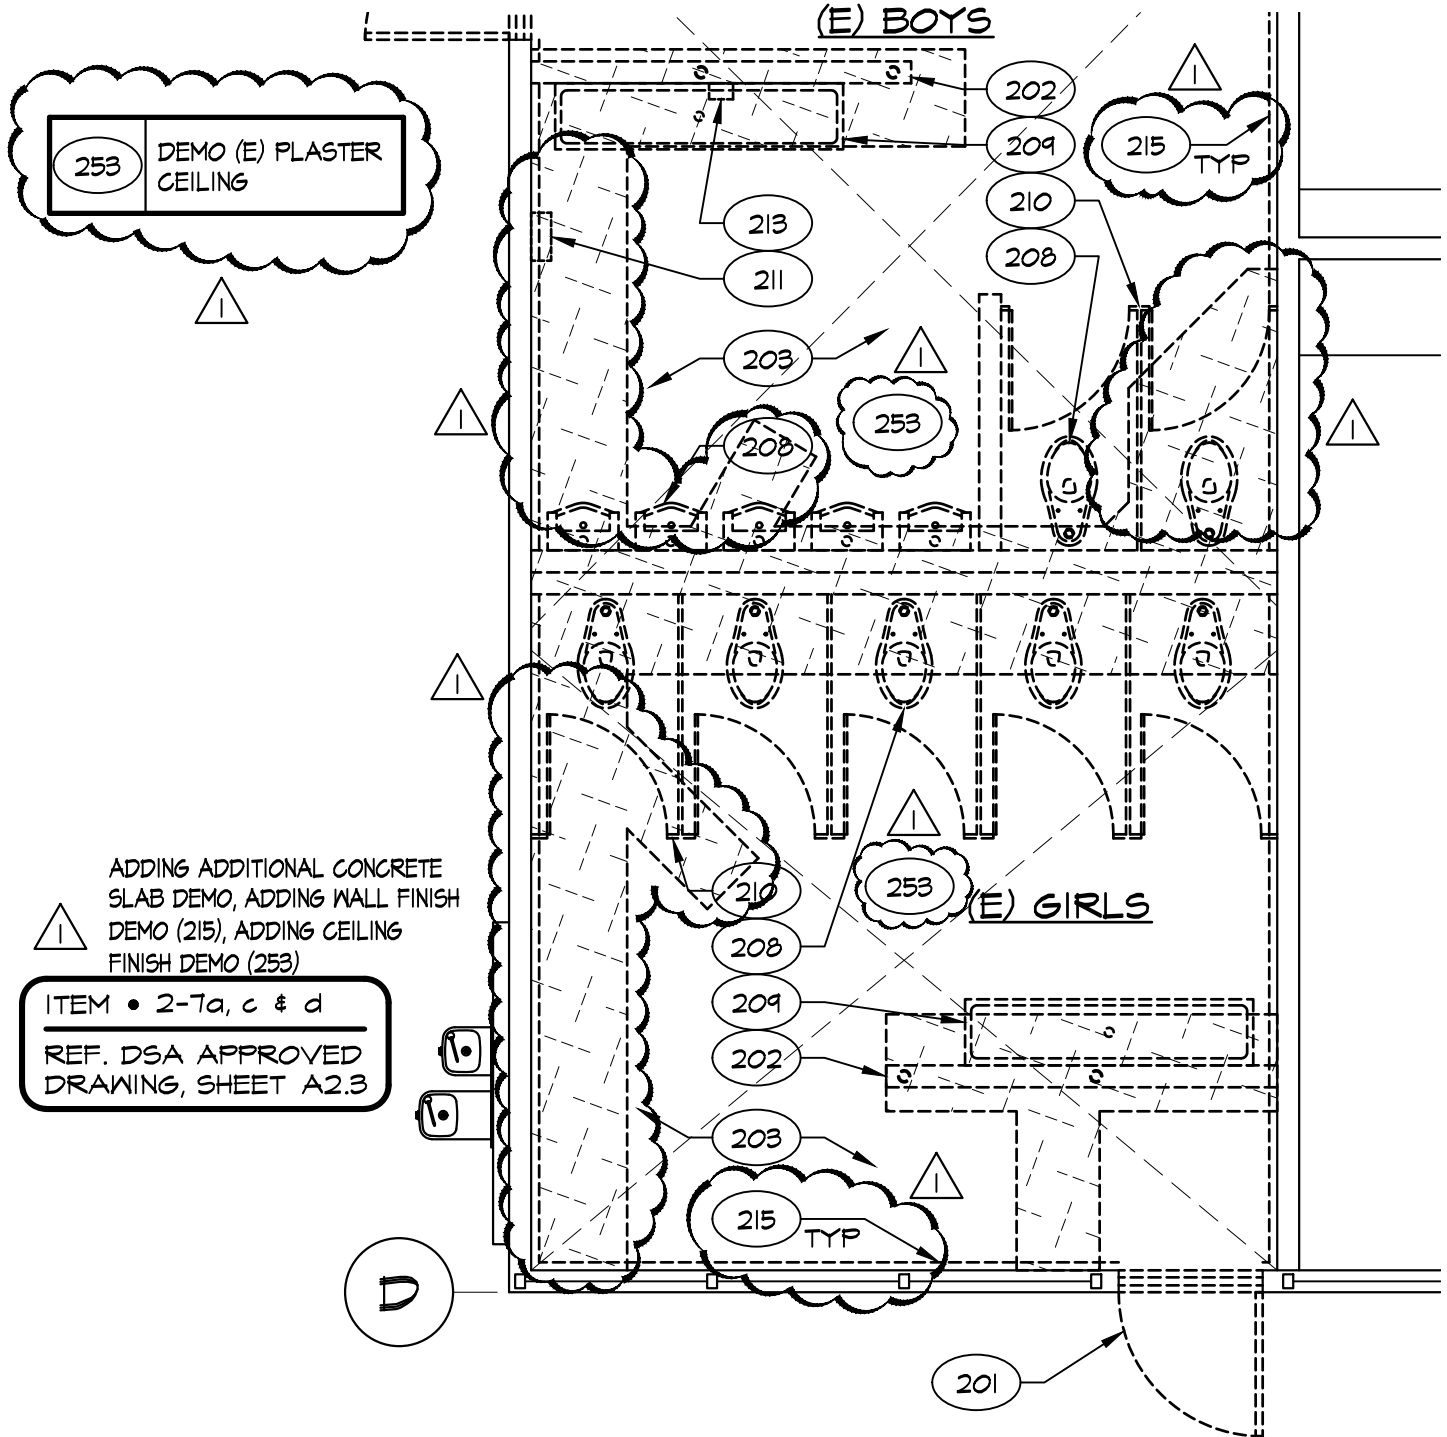

PLAN NORTH

PARTIAL DEMO FLOOR PLAN



SCALE : 1/4" = 1'-0"



1601 NEW STINE RD., STE 280
BAKERSFIELD, CA 93309
FAX: (661) 397-4378
PH: (661) 397-4377



ADDENDUM NO. 02		JOB NO: 1317	DATE: 6/17/24
ROOSEVELT ELEMENTARY SCHOOL MODERNIZATION 2324 VERDE STREET BAKERSFIELD CITY SCHOOL DISTRICT BAKERSFIELD, KERN COUNTY, CALIFORNIA		APPL#: 03-122920	FILE#: 15-6
		DWG NO: 03	

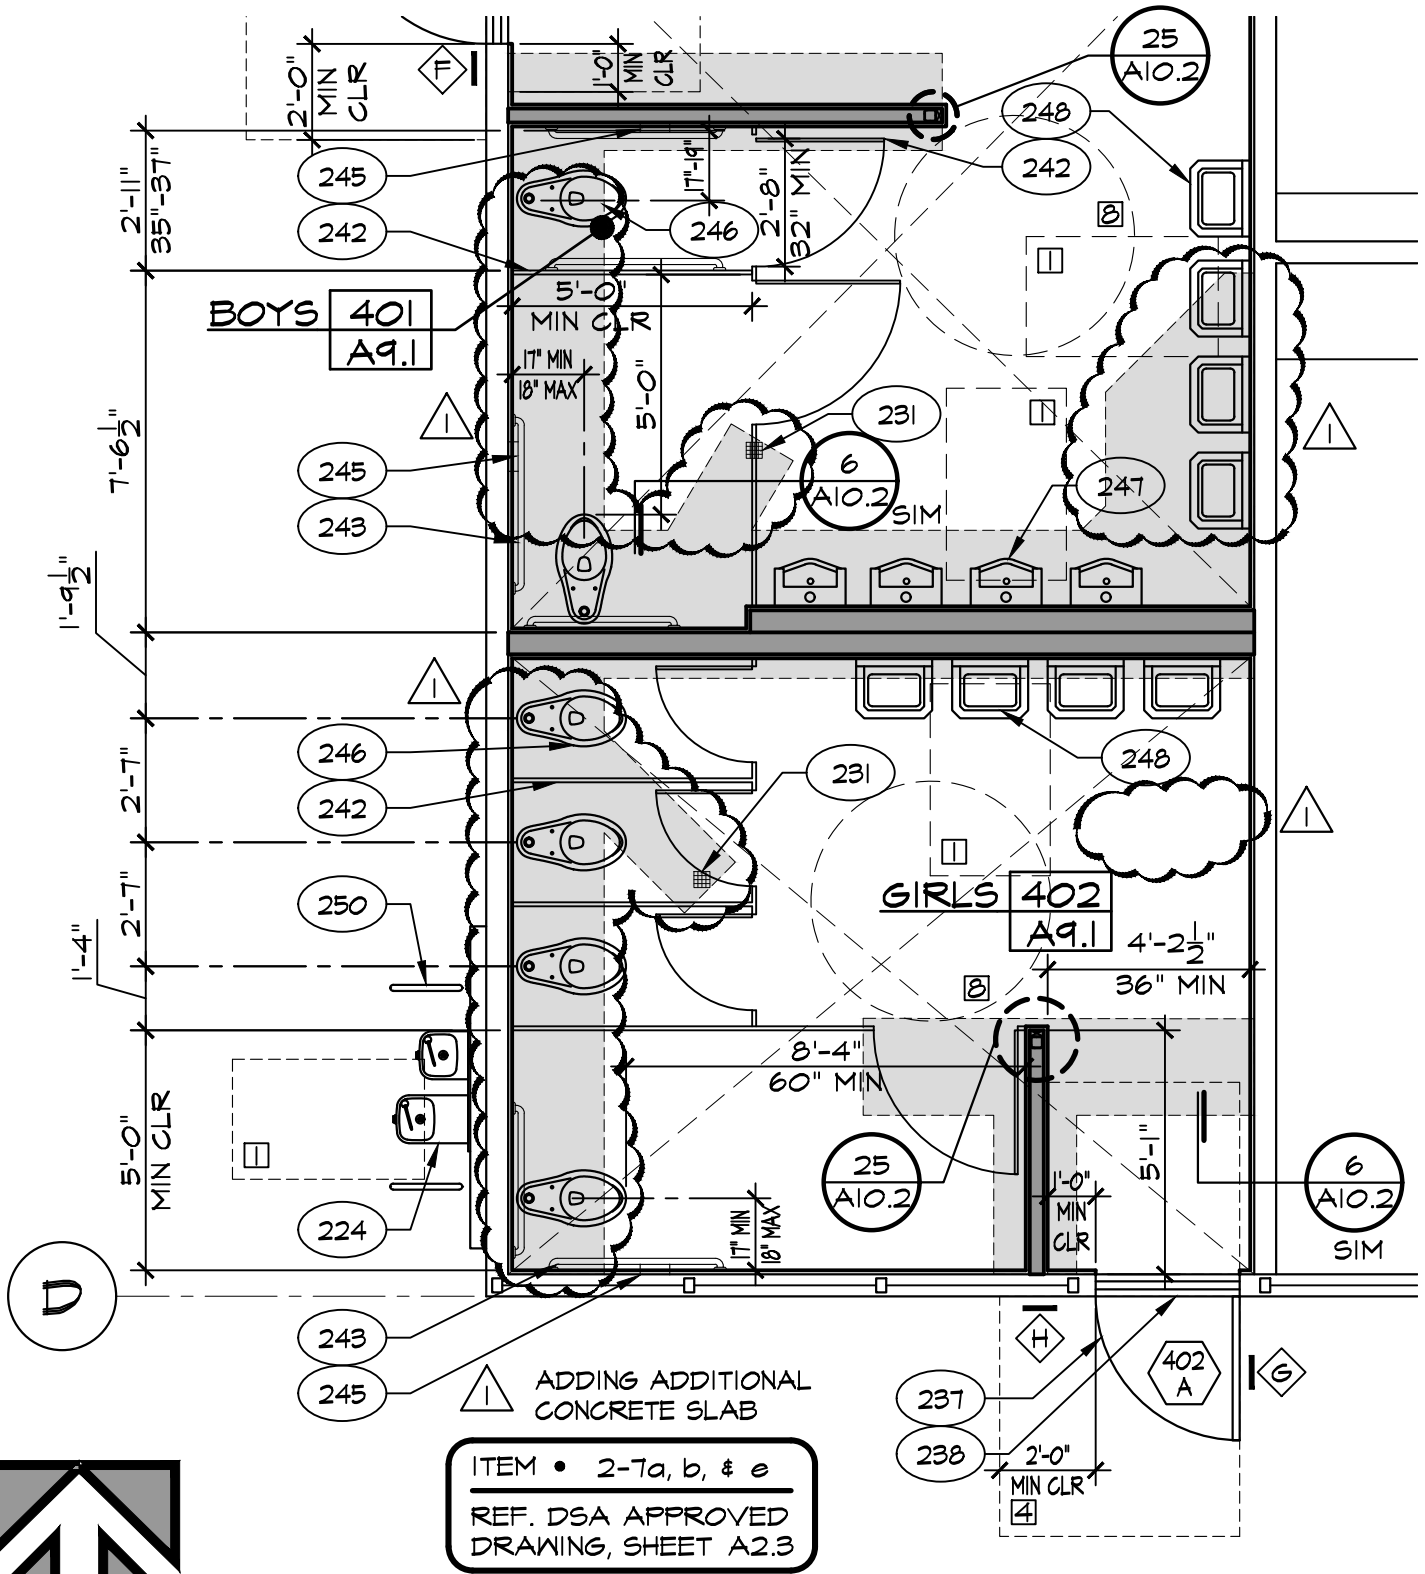

PLAN NORTH



1601 NEW STINE RD., STE 280
BAKERSFIELD, CA 93309
FAX: (661) 397-4378
PH: (661) 397-4377



PARTIAL FLOOR PLAN

SCALE : 1/4" = 1'-0"

ADDENDUM NO. 02		JOB NO: 1317	DATE: 6/17/24
ROOSEVELT ELEMENTARY SCHOOL MODERNIZATION		APPL#: 03-122920	FILE#: 15-6
2324 VERDE STREET BAKERSFIELD CITY SCHOOL DISTRICT BAKERSFIELD, KERN COUNTY, CALIFORNIA		DWG NO: 04	

△ ADDING DETAIL #2

ITEM • 2-11a

REF. DSA APPROVED
DRAWING, SHEET A10.2

△

CONT. BEAD OF CAULK
AROUND EDGE

STAINLESS STEEL
CLAMPING RING

STORM COLLAR SET IN
MASTIC PRIME FLANGE

VTR PIPE

SEALANT PER SPEC


#12x1" SEAM FASTENER
1/4" OC HEAD EDGE WITHIN 1/4"
OF SEAM EDGE, TYP

FOAM ROOF
PER SPEC

(E) 1" DIAGONAL
SHEATHING

(E) 2x4 PURLINS
@ 24" OC

NOTE: REFER TO PLUMBING
DRAWINGS FOR LOCATION
OF VTR'S

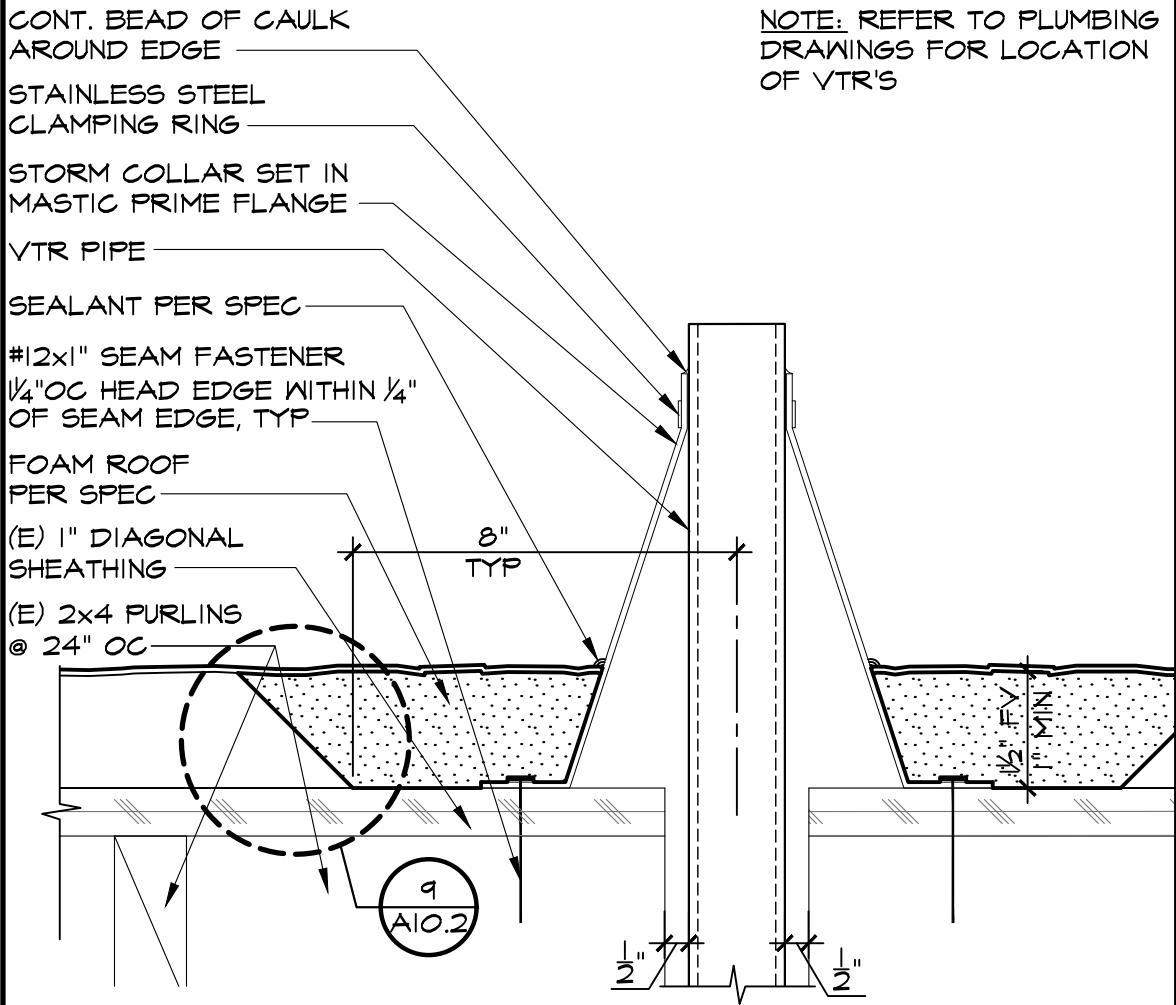

2

PIPE BOOT FLASHING @ ROOFING SCALE: 3"=1'-0"



1601 NEW STINE RD., STE 280
BAKERSFIELD, CA 93309
FAX: (661) 397-4378
PH: (661) 397-4377



ADDENDUM NO. 02

ROOSEVELT ELEMENTARY SCHOOL
MODERNIZATION

2324 VERDE STREET
BAKERSFIELD CITY SCHOOL DISTRICT
BAKERSFIELD, KERN COUNTY, CALIFORNIA


JOB NO: 1317	DATE: 6/17/24
APPL#: 03-122920	FILE#: 15-6
DWG NO: 05	

△ REVISING DRINKING
FOUNTAIN GRAPHICS

ITEM • 2-12a

REF. DSA APPROVED
DRAWING, SHEET A9.0

PATCH & MATCH
FINISH AS REQUIRED

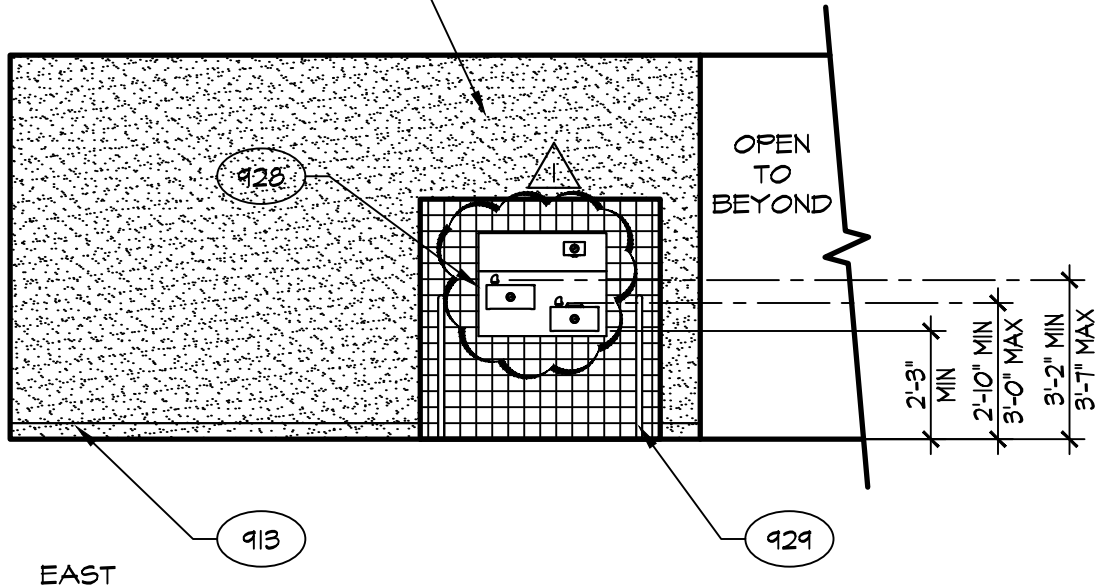

EAST

106	CORRIDOR
	BLDG 'A'

INTERIOR ELEVATION

SCALE: 1/4" = 1'-0"



1601 NEW STINE RD., STE 280
BAKERSFIELD, CA 93309
FAX: (661) 397-4378
PH: (661) 397-4377




ADDENDUM NO. 02

ROOSEVELT ELEMENTARY SCHOOL
MODERNIZATION

2324 VERDE STREET
BAKERSFIELD CITY SCHOOL DISTRICT
BAKERSFIELD, KERN COUNTY, CALIFORNIA


JOB NO: 1317	DATE: 6/17/24
APPL#: 03-122920	FILE#: 15-6
DWG NO: 06	

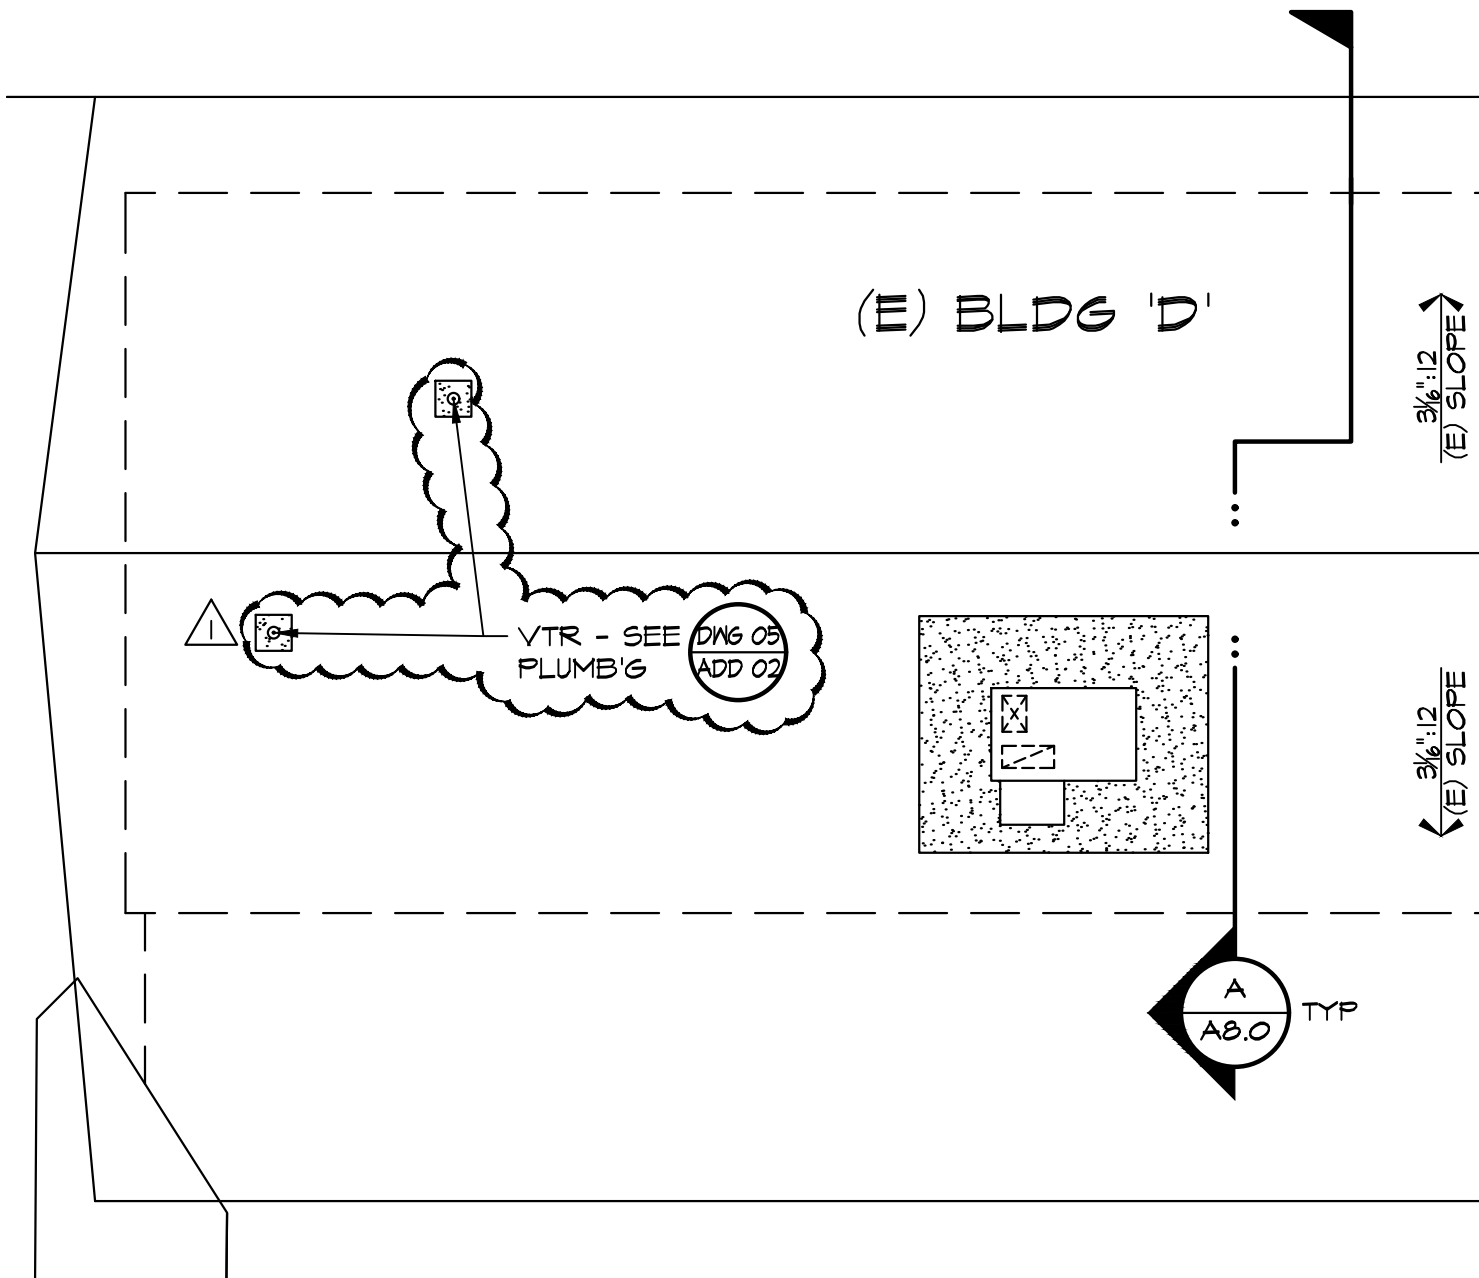

△ ADDING VTR'S

ITEM • 2-13a

REF. DSA APPROVED
DRAWING, SHEET A6.0



PLAN NORTH

PARTIAL ROOF PLAN BUILDING 'D'

SCALE : 1/8" = 1'-0"




1601 NEW STINE RD., STE 280
BAKERSFIELD, CA 93309
FAX: (661) 397-4378
PH: (661) 397-4377



ADDENDUM NO. 02		JOB NO: 1317	DATE: 6/17/24
ROOSEVELT ELEMENTARY SCHOOL MODERNIZATION 2324 VERDE STREET BAKERSFIELD CITY SCHOOL DISTRICT BAKERSFIELD, KERN COUNTY, CALIFORNIA		APPL#: 03-122920	FILE#: 15-6
		DWG NO: 07	

ADDENDUM NO. 02 ROOSEVELT ELEMENTARY SCHOOL MODERNIZATION 2324 VERDE STREET BAKERSFIELD CITY SCHOOL DISTRICT BAKERSFIELD, KERN COUNTY, CALIFORNIA	JOB NO: 1317	DATE: 6/17/24
	APPL#: 03-122920	FILE#: 15-6
	DWG NO: 08	

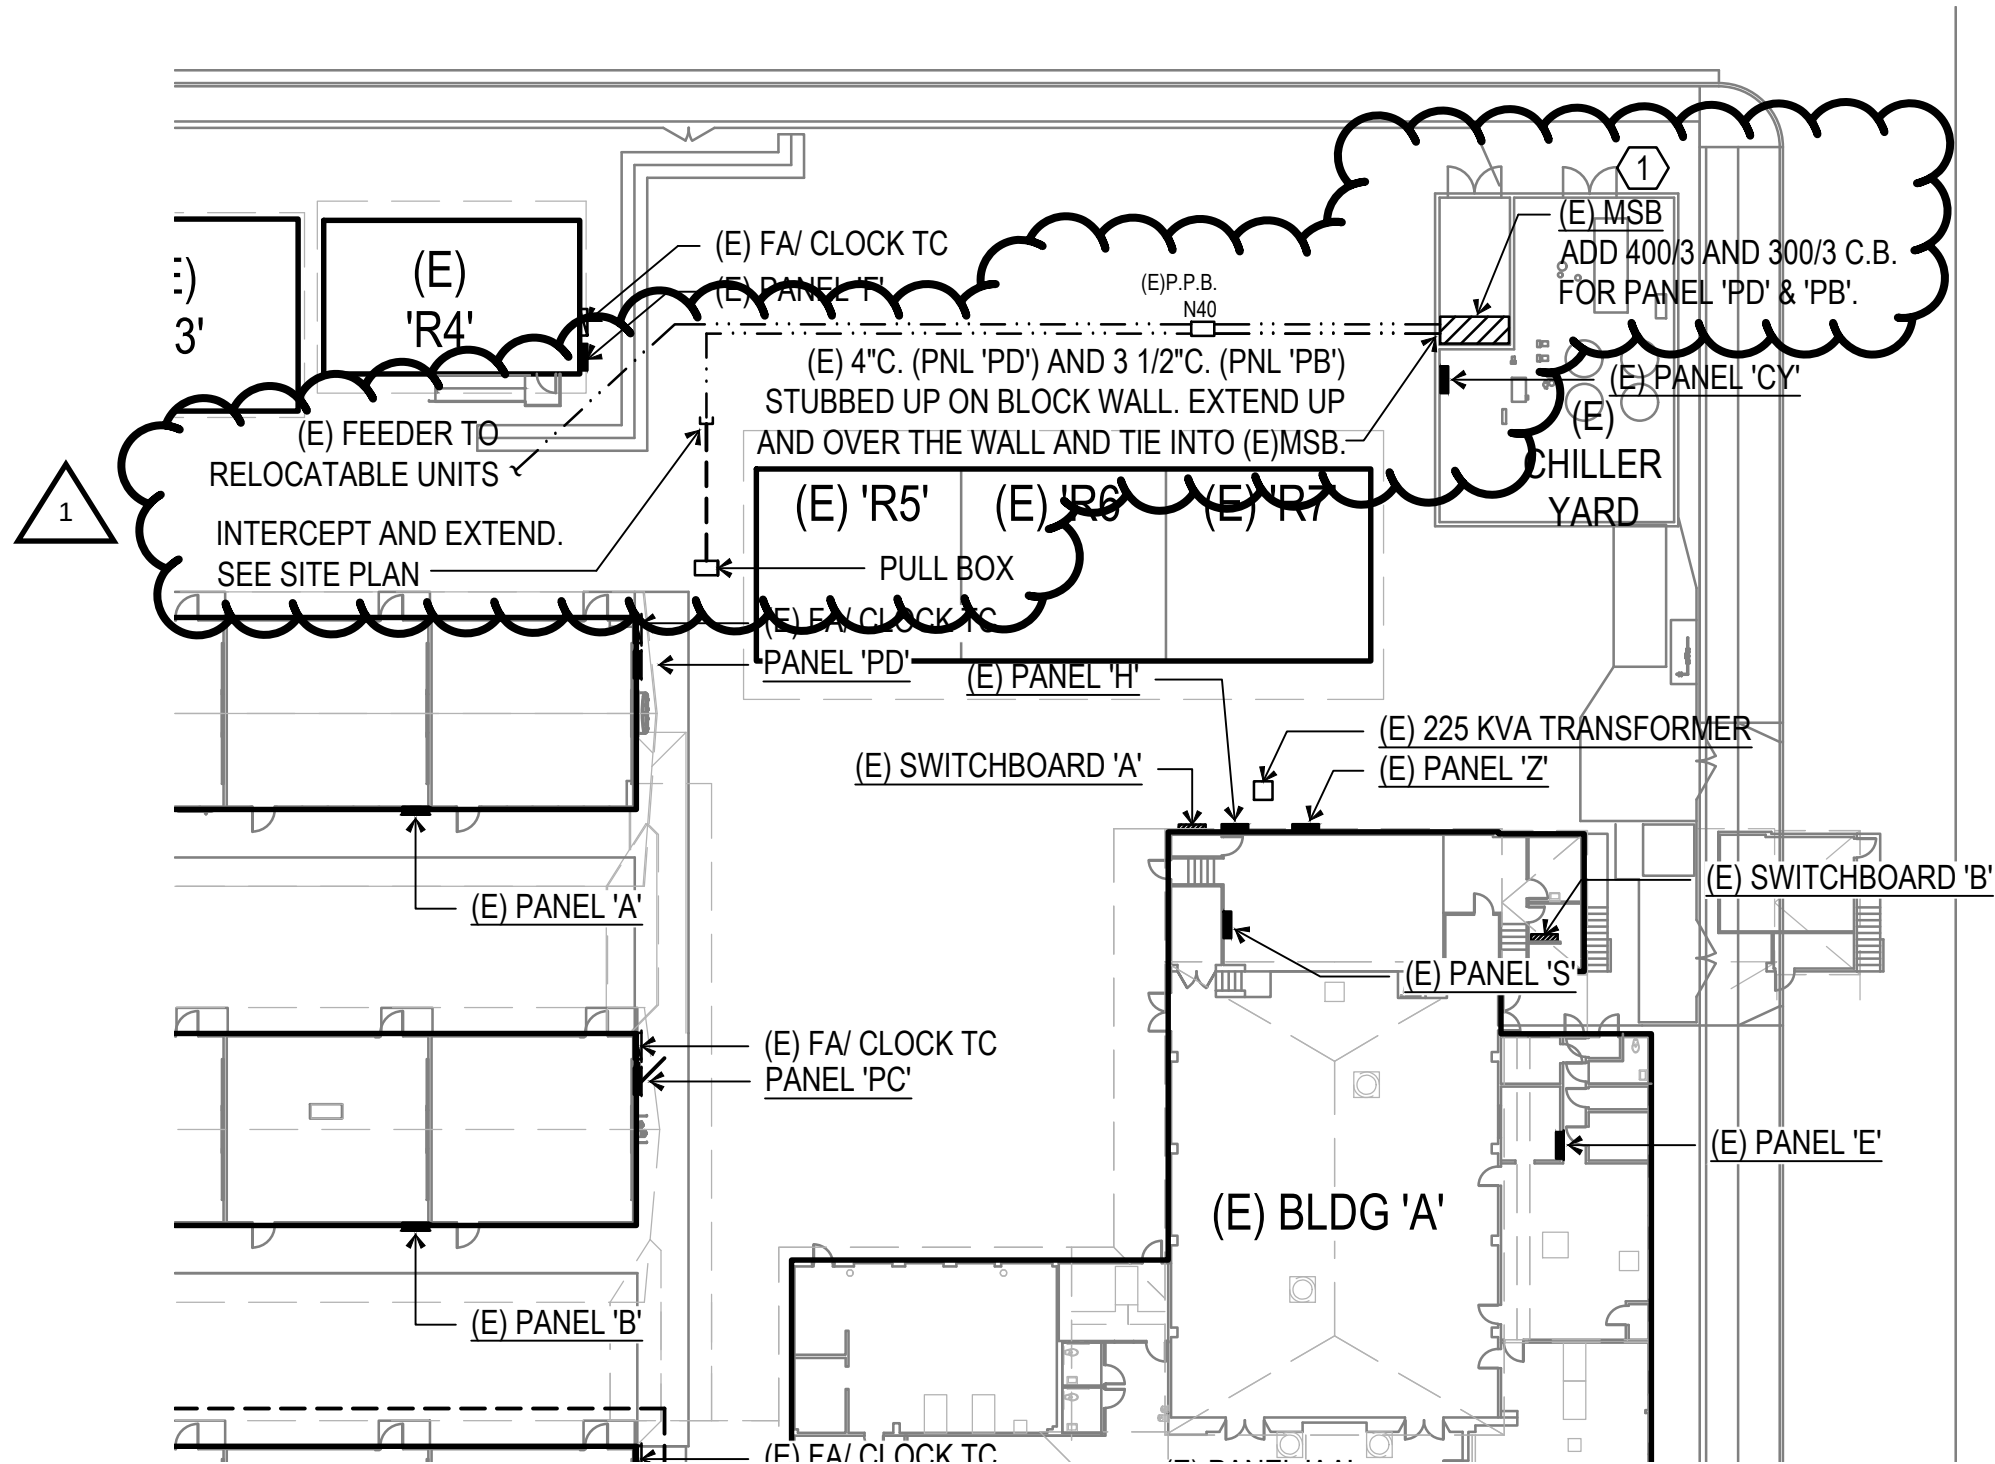

REFERENCE NOTES

- 1 EXISTING MSB TO BE REPLACED SUMMER OF 2025. DISCONNECT TEMPORARY PANEL 'PD' AND 'PB' FEEDERS. INTERCEPT AND EXTEND 4" C AND 3 1/2" C FROM EXISTING N40 P.B. BORE UNDER EXISTING BLOCK WALL FOOTING TO NEW MSB.



- 1 TEMP POWER TO (E) MSB AND INSTALL DISTRICT PROVIDED MSB


ITEM • 2-17

REF. DSA APPROVED
DRAWING, SHEET E1.00

ADDENDUM NO. 02		JOB NO: 1317	DATE: 06/12/24
ROOSEVELT ELEMENTARY SCHOOL MODERNIZATION 2324 VERDE STREET BAKERSFIELD CITY SCHOOL DISTRICT BAKERSFIELD, KERN COUNTY, CALIFORNIA		APPL#: 03-122920	FILE#: 15-6
		DWG NO: 09	

PARTIAL ELECTRICAL SITE PLAN


SCALE : 1" = 30'-0"



DPG
Engineering Inc.
6702 N. Cedar Suite 205
Fresno, Ca. 93710
Ph. (559) 276-5144
Fax (559) 900-4929
Email @ dpgengineering.com



1601 New Stine Road, #280
Bakersfield, CA 93309 Ph: (661)
397-4377 FAX: (661) 397-4378
WWW.SCARCHITECT.COM

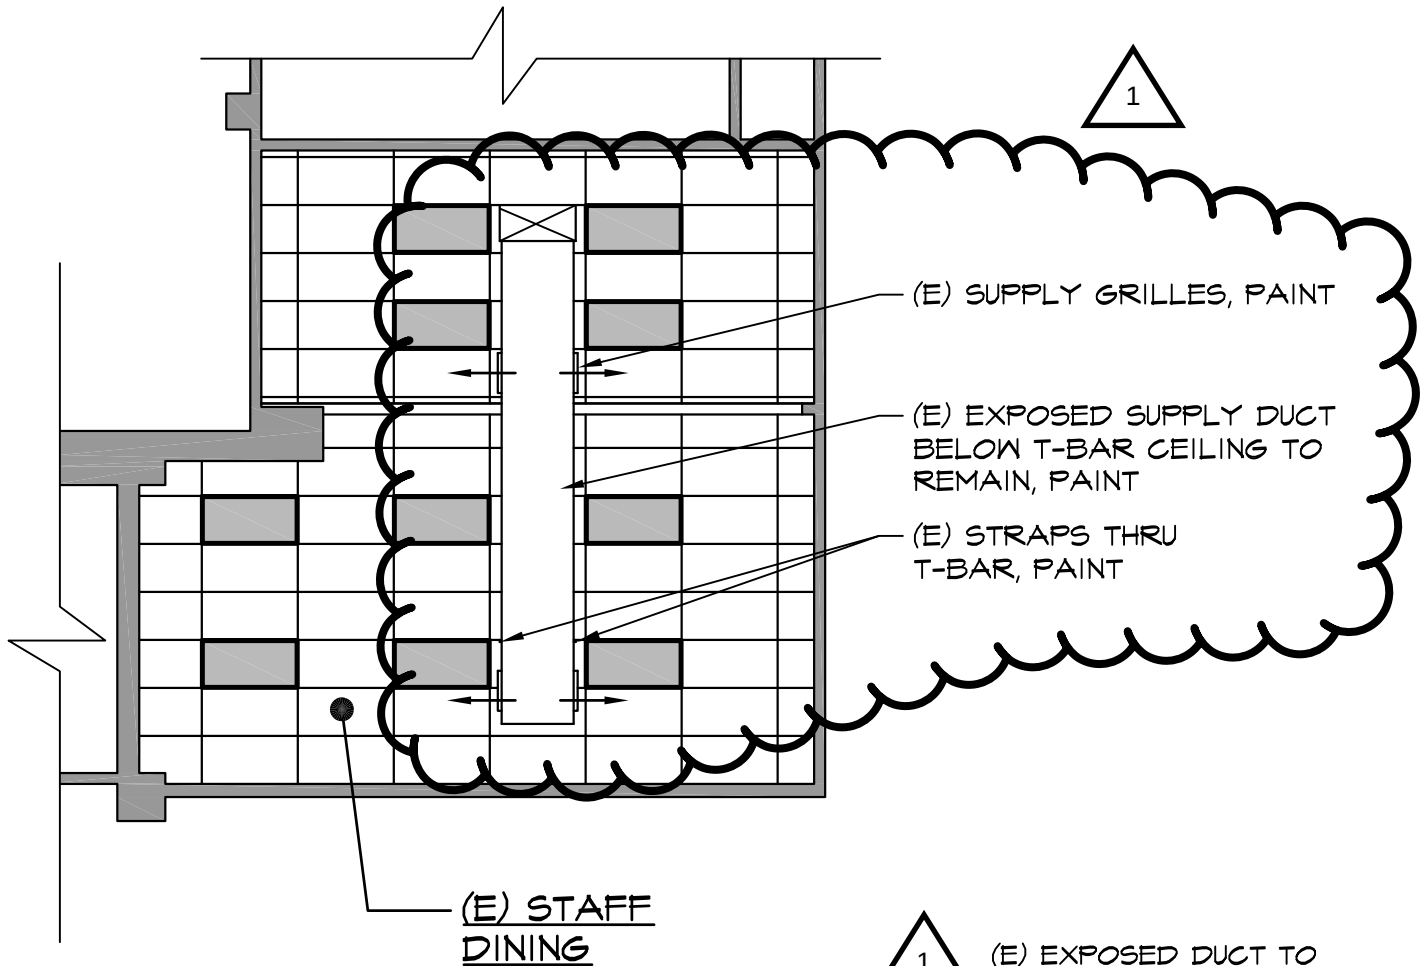


1 (E) EXPOSED DUCT TO REMAIN

ITEM • 2-20a

REF. DSA APPROVED
DRAWING, SHEET A4.0

PARTIAL REFLECTED CEILING PLAN BUILDING 'A'

SCALE : 1/8" = 1'-0"



1601 NEW STINE RD., STE 280
BAKERSFIELD, CA 93309
FAX: (661) 397-4378
PH: (661) 397-4377




ADDENDUM NO. 02

ROOSEVELT ELEMENTARY SCHOOL MODERNIZATION

2324 VERDE STREET
BAKERSFIELD CITY SCHOOL DISTRICT
BAKERSFIELD, KERN COUNTY, CALIFORNIA

JOB NO: 1317	DATE: 6/17/24
APPL#: 03-122920	FILE#: 15-6
DWG NO: 10	

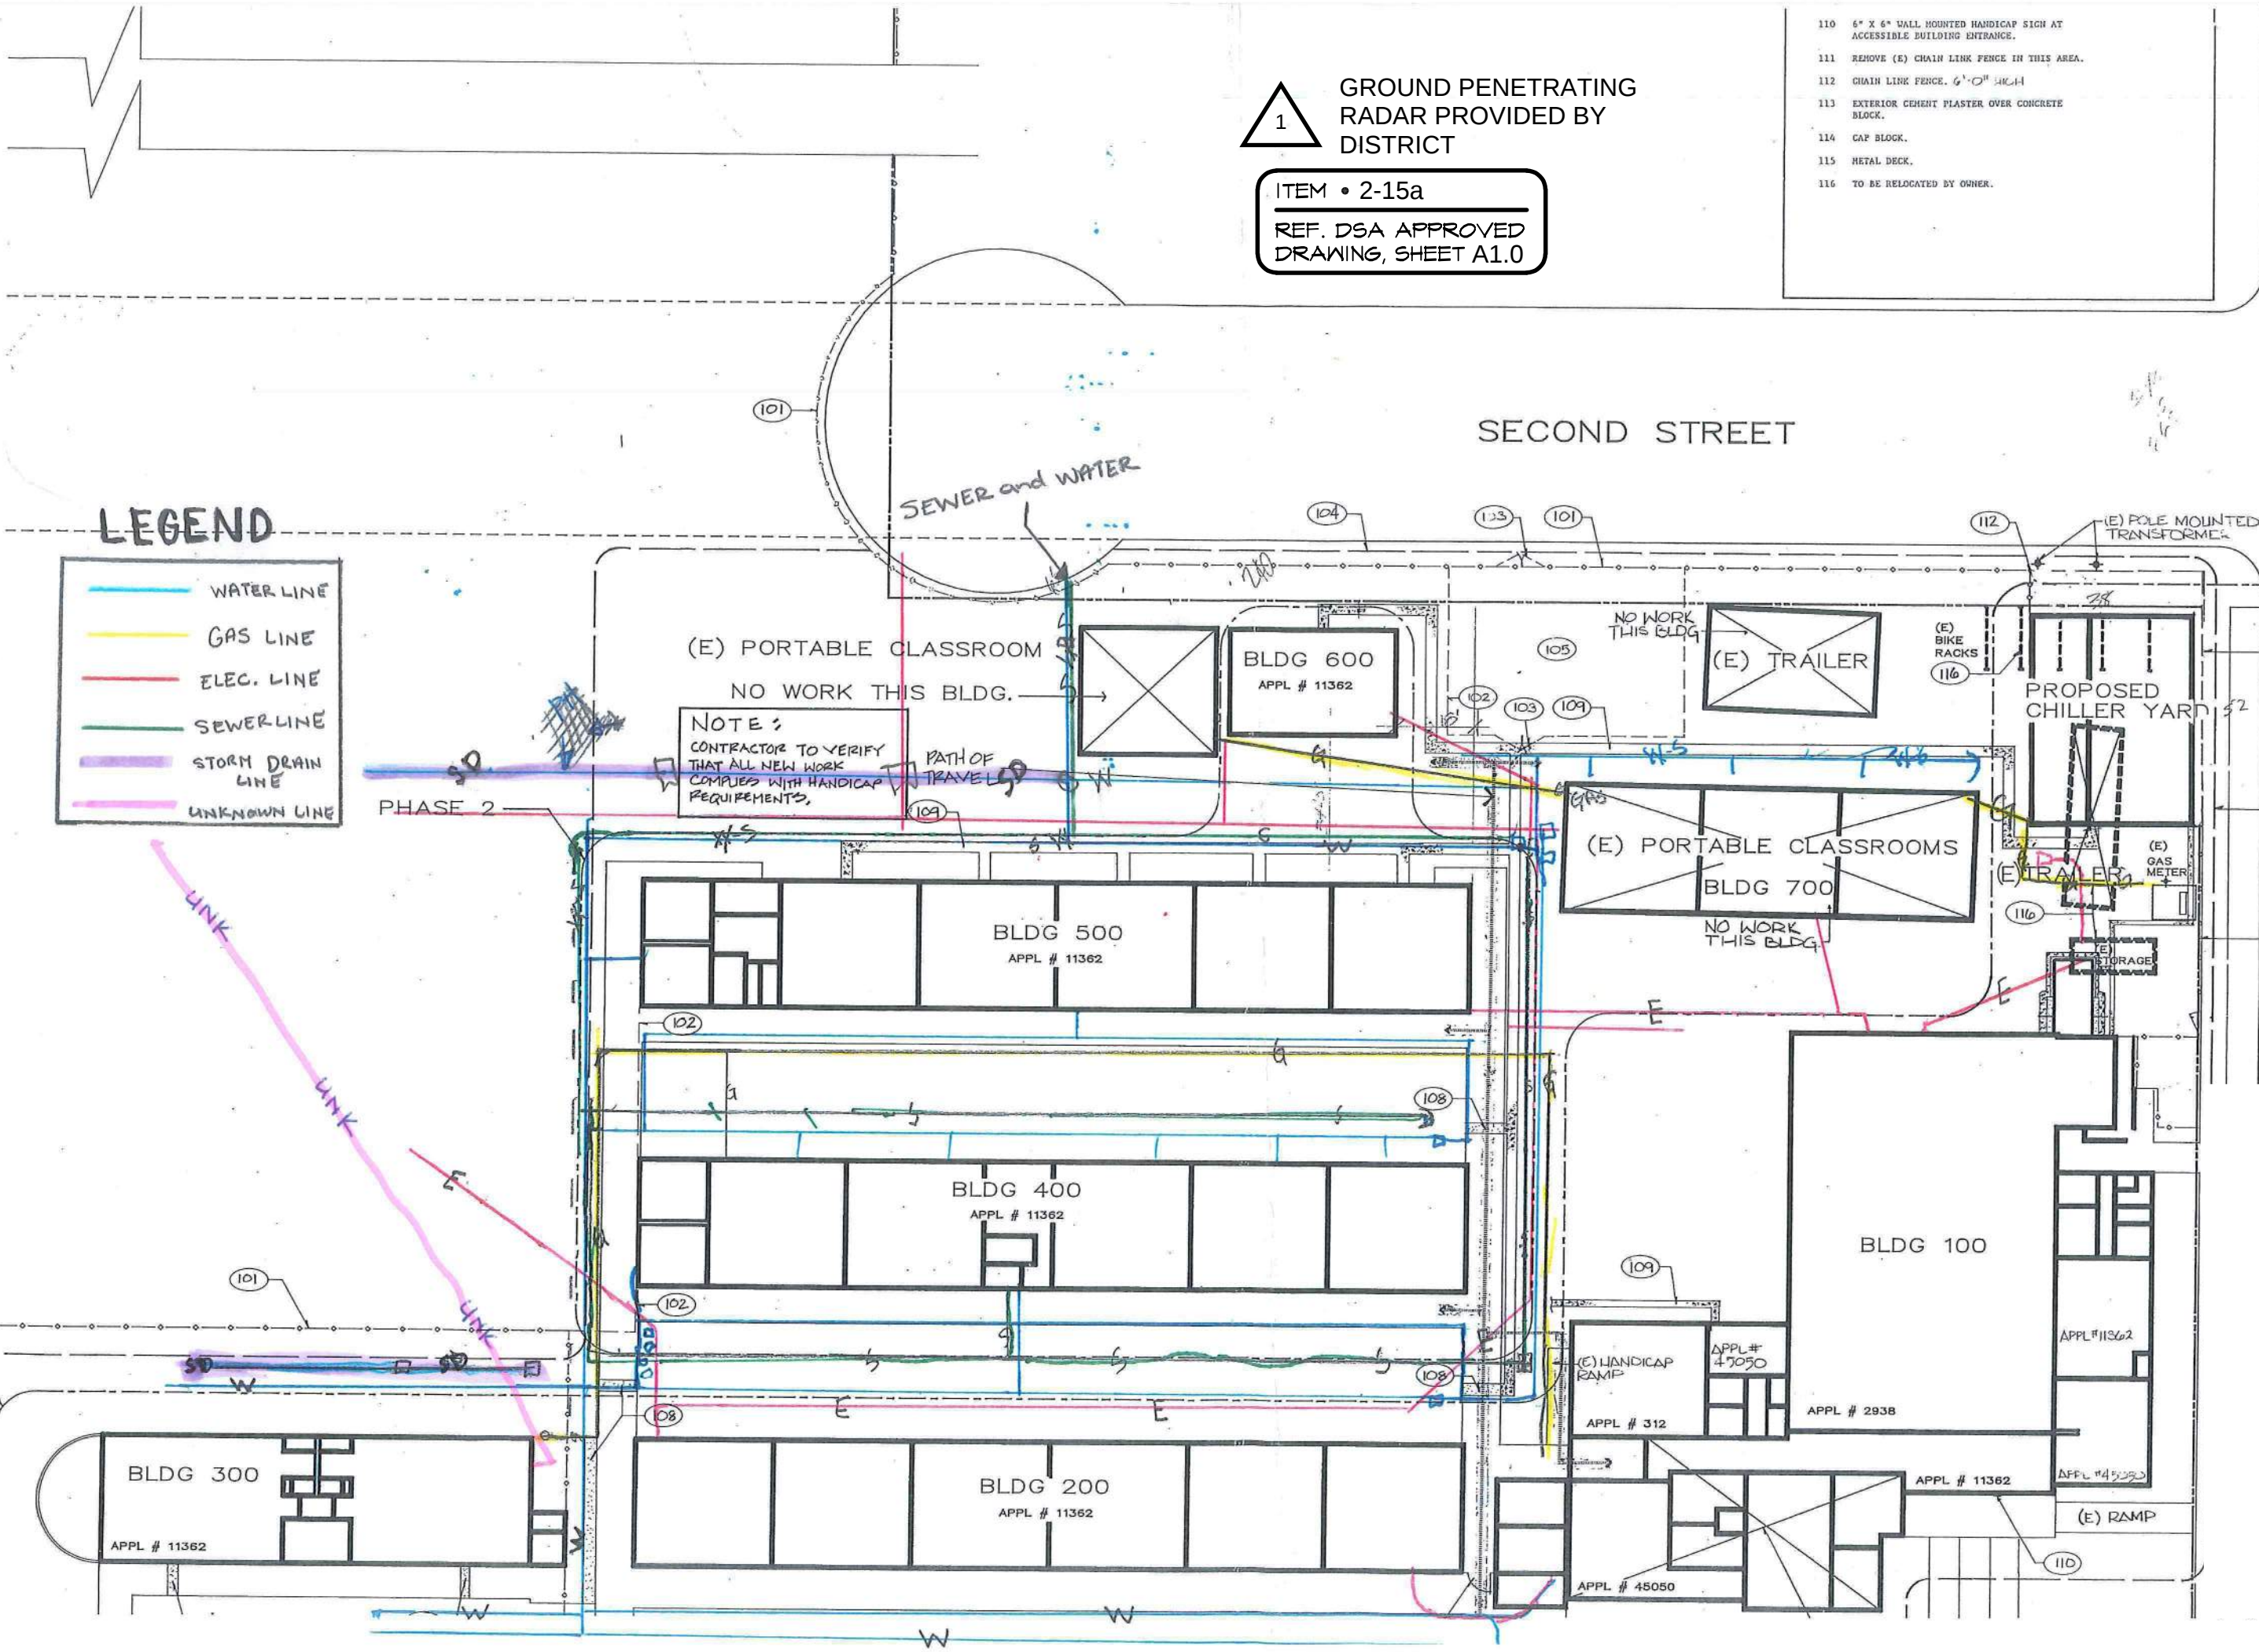

GROUND PENETRATING
RADAR PROVIDED BY
DISTRICT

ITEM • 2-15a
REF. DSA APPROVED
DRAWING, SHEET A1.0

- 110 6" X 6" WALL MOUNTED HANDICAP SIGN AT ACCESSIBLE BUILDING ENTRANCE.
- 111 REMOVE (E) CHAIN LINK FENCE IN THIS AREA.
- 112 CHAIN LINK FENCE, 6'-0" HIGH
- 113 EXTERIOR CEMENT PLASTER OVER CONCRETE BLOCK.
- 114 CAP BLOCK.
- 115 METAL DECK.
- 116 TO BE RELOCATED BY OTHER.

LEGEND

- WATER LINE
- GAS LINE
- ELEC. LINE
- SEWER LINE
- STORM DRAIN LINE
- UNKNOWN LINE

(E) PORTABLE CLASSROOM

NO WORK THIS BLDG.

NOTE:
CONTRACTOR TO VERIFY
THAT ALL NEW WORK
COMPLIES WITH HANDICAP
REQUIREMENTS.

PATH OF
TRAVEL

SECOND STREET

BLDG 600
APPL # 11362

(E) TRAILER

NO WORK
THIS BLDG

PROPOSED
CHILLER YARD

(E) PORTABLE CLASSROOMS

BLDG 700

NO WORK
THIS BLDG

BLDG 500
APPL # 11362

BLDG 400
APPL # 11362

BLDG 100

BLDG 300
APPL # 11362

BLDG 200
APPL # 11362

(E) HANDICAP
RAMP

APPL # 312

APPL # 2938

APPL # 11362

(E) RAMP

ADDENDUM NO. 02

ROOSEVELT ELEMENTARY SCHOOL
MODERNIZATION

2324 VERDE STREET
BAKERSFIELD CITY SCHOOL DISTRICT
BAKERSFIELD, KERN COUNTY, CALIFORNIA

JOB NO: 1317
DATE: 6/12/24

APPL #: 03-122920
FILE #: 15-6

DWG NO:

11

SCHEDULING OF WORK

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of Contract, including General and Supplementary Conditions and other Division 0 & 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. General: This Section specifies administrative and procedural requirements for the critical path method (CPM) of scheduling and reporting progress of the Work.
 - 1. Refer to General Conditions, Supplementary Conditions and the Agreement, for definitions and specific dates of Contract Time.
 - 2. A Contract Schedule using CPM, with all the elements specified in entire contract documents, is a fundamental and basic requirement for the review and monitoring of the prime Contractors successful and timely progress on the Project. The Contract Schedule specified will be provided and maintained by the Construction Manager. The Prime Contractors shall comply with the with the schedule and provide all necessary information for updating the schedule as directed by the construction manager.
- B. Prime Contractors superintendent or foreman's daily logs, submit weekly as scanned documents.
- C. Related Sections:
 - 1. Division 1 Section "Submittals" for submitting schedules and reports.
 - 2. Division 1 Section "Quality Control Services" for submitting a schedule of tests and inspections.

1.3 DEFINITIONS

- A. Critical path method (CPM) is a construction scheduling technique using Precedence Diagram Method (PDM) to plan and organize construction activities in an orderly manner and to establish the critical path of Work for the timely completion of the Project.
- B. Network: A precedence diagram is a graphic representation showing the relationship of activities and events in the correct sequences required to complete the Work within the Contract Time.
- C. Activity: An activity is any single identifiable step in the performance of the Work. It is dependent on other activities, and the interrelationship between all activities is the basis of the network analysis and calculation of the critical path.
 - 1. Critical activities are activities with no (zero or negative) total float time and are, therefore, operations that determine the critical path and control completion of the Work.
- D. Event: An event is the starting or ending point of an activity and occurs only when all preceding activities have been completed.

- E. Float time is the amount of time available for a given activity in excess of its estimated duration. It represents the amount of leeway available in scheduling an activity. Neither Contractor nor Owner shall have an exclusive right to the use of float. The effects of used float shall be documented by the Contractor on the updated Contract Schedule. Since float time is not for the exclusive use of either party, but is jointly owned, it is a resource available to and shared by both parties as needed to meet the Contract completion date.
1. Free float is the amount of time an activity can be delayed without adversely affecting the early start of the following activity.
 2. Total float is the amount of time an activity can be delayed without adversely affecting overall time for completion of the Work.
 3. The earlier time difference from the date of completion of the project as established by the Contractors Schedule and the later time indicated in the Contract Documents shall be considered float time that can be used by either or both Owner and Contractor. While the Contractor may schedule completion of the Project earlier than the date established by the Contract Documents, no additional compensation shall become due the Contractor for the use of float time between the Contractor's projected early completion date and the completion date established by the Contract Documents. The Owner may use this float time for additional work due to Change Orders, use of Allowance funds and Contractors Change Orders that impact the project schedule.

1.4 COMPLIANCE WITH SCHEDULE

- A. The Prime Contractors and all entities or firms employed by or under the control of the Prime Contractors shall meet the Contract Schedule. The Construction Manager will review the progress of the Work at least once a month. If any Work falls behind the schedule more than ten (10) days for any stage of the Work, the Prime Contractor shall regain the scheduled position within thirty (30) days.
4. The Prime Contractor shall supply more workers and equipment when necessary to meet the Schedule. Include overtime, weekend, and extra shifts as necessary, without extra cost to the Owner.
 5. The Prime Contractor has the responsibility to conduct the Work in accordance with the Contract Schedule and to maintain the accuracy, updating, enforcement and distribution of the Contract Schedule.
 6. If the Contractor does not regain the schedule position within the thirty (30) days, the Owner and Construction manager may assess interim liquidated damages.
- B. If Prime Contractor is behind schedule by more than ten (10) days for any stage of the Work, based on the updated Contract Schedule after incorporating all approved time extensions if any, Contractor shall submit to construction manager within five (5) days of notification of such delay, a "recovery plan". The recovery plan shall be based on proposed revisions to Contract Schedule for the next sixty (60) day period and shall show how the Contractor intends to bring the Work back on schedule. Recovery plan shall also include a written description of how the measures that the Contractor intends to take without additional cost to Owner shall regain Schedule compliance. The recovery plan activities shall be identified according to their relationship to activities on the accepted Contract Schedule.
1. Should Prime Contractor fail to submit and execute such recovery plan, the Owner and construction manager shall have the option to direct Prime Contractor to employ any or all measures that the Owner may deem fit to regain schedule compliance without additional cost to the Owner.
 2. Recovery plan submitted by prime Contractor, upon acceptance by the construction

BCSD – ROOSEVELT ELEMENTARY SCHOOL MODERNIZATION

manager, shall be incorporated into the Contract Schedule during the next update by construction manager

3. Prime Contractor will be required to submit a recovery plan for each update that indicated that the Work progress is more than ten (10) days behind schedule.
4. Should Contractor dispute the determination of the construction manager regarding the status on Contract delay, such dispute shall not relieve him/her of the responsibility to comply with the requirements of this Section and other related sections until the dispute is resolved in accordance with the Contract Documents.

1.5 THE OWNER'S DISCLAIMER OF SCHEDULE

- A. Acceptance of the Contract Schedule by Construction manager, Architect or the Owner is for general conformity with the requirements of the Contract Documents. Acceptance of the Schedule does not relieve any one of the prime Contractors of responsibility for including all elements of the Work, for the reasonableness of the Schedule, or for the accuracy or suitability of the Schedule to meet the agreed completion or milestone dates.

1.6 THREE WEEK LOOK-AHEAD SCHEDULE

- A. Prepare weekly, for the weekly Project Meeting, a computer-generated Three (3) Week Look-Ahead Schedule (barchart) which is consistent with the CPM schedule and depicts daily labor activities. The Three-Week Schedule will consist of the prior week, current week and the following week. Three week look-ahead schedule to be submitted by each prime contractor to the construction manager no later than 24 hours prior to each one of the weekly project meetings

1.7 DAILY CONSTRUCTION REPORTS

- A. Prepare a Daily Construction Report in a form acceptable to the construction manager.
 1. Provide the information requested.
 2. S
- B. Contractor's daily diary.
 1. Provide copy of any Daily Diaries related to this project by Contractor. Submit at weekly intervals, on digital media to the Construction Manager.

PART 2 - PRODUCTS (Not Used).

PART 3 - EXECUTION (Not Used).

END OF DOCUMENT

REMOVAL OF ASBESTOS-CONTAINING ROOFING MATERIALS

Divisions 00 & 01 ARE PART OF THIS SECTION

GENERAL**1.01 SCOPE:**

The work required under this section consists of all asbestos abatement related items necessary and required to complete the work as indicated in the Contract Documents. Refer to project drawings and previous asbestos survey report prepared by T. Brooks & Associates, a division of Provost & Pritchard Consulting Group (TBA/P&P) for information concerning locations of identified asbestos-containing roofing materials to be impacted as part of the proposed project.

Based on representative bulk sampling of low-slope and steep-slope asphaltic roofing systems on representative structures at the subject school site considered as part of our investigation, asphaltic built-up roofing with silver roof coating, and built-up roofing tested positive for asbestos at various roof locations. All roofs which were identified as containing asbestos are to be treated as asbestos-containing for the purposes of the project. All work which disturbs ACRM shall be conducted in accordance with these specifications and all applicable local, state and federal regulations having jurisdiction over the work.

The Contractor shall comply with the requirements of OSHA's Hazard Communications Standard for but not limited to hazardous materials, fall protection, and shall provide employee training as required under OSHA regulations.

The Contractor shall provide all items, articles, materials, operations, or methods listed, mentioned or scheduled on the drawings and/or specified herein, including all labor, materials, equipment, and incidentals necessary and required for their completion.

Contractor shall utilize fall protection measures in accordance with Cal/OSHA requirements to protect the health and safety of employees engaged in work as part of the project.

1.02 WORK INCLUDED:

All non-asbestos containing roofing materials and related items, which are not contaminated with ACRM elements or debris may be treated as non-asbestos-containing for the purposes of the project, as long as the waste is segregated.

Contractor shall abate all identified asbestos-containing roofing building materials (ACRM's) at specified roof locations at the subject site as indicated in the project design documents so as to allow for renovation operations involving those structures as defined in project documents. Contractor shall review previous Asbestos Survey Report prepared by T. Brooks & Associates, a division of Provost & Pritchard Consulting Group dated February 16, 2023 to determine locations of identified asbestos-containing roofing materials (ACRM's) at

the subject site which will be impacted by the proposed renovation operations based on review of asbestos survey and all project design documents.

All work involving disturbance of roofing materials designated as asbestos-containing materials shall be completed by a contractor currently registered and licensed by the State of California for asbestos related work. Work shall not commence until approval of all asbestos related submittals from Contractor or qualified abatement sub-contractor.

The Contractor shall make provision for site security and operational procedures such that Building employees, tenants, other trades, and the general public shall not be exposed to airborne asbestos above regulatory levels as a result of activities performed under the Contract. Non abatement employees or personnel, or non-abatement work shall not be permitted within any posted "regulated area" during the course of work involving disturbance of asbestos-containing roofing materials.

All work involving disturbance of asbestos-containing roofing materials shall be as determined by the project design documents. Contractor shall provide necessary lighting, fall protection, and safety equipment as required or regulated to complete the specified work if conducted at night. Night work requires permission of the Building Owner.

Off-loading of ACRM shall be in compliance with OSHA requirements and these specifications.

Contractor may only off-load roofing materials, including asbestos-containing roofing materials from the roof during limited hours as designated by the Owner and its Asbestos Consultant Representative. Any asbestos-containing roofing materials which have been disturbed, and which remain on the roof overnight shall be placed in sealed waste bags, or covered with 6-mil polyethylene film prior to the end of the shift during which they are disturbed and shall be placed within a "regulated area" on the roof with proper labeling per OSHA regulations.

Off-loading of roofing materials by forklift or other mechanical means shall be performed by Contractor's employees and shall be performed only during hours designated by the Building Owner or its Representative. Any off-loading by non-mechanical means, such as use of a waste chute shall be approved by the Building Owner and it's Asbestos Consultant Representative.

1.03 DEFINITIONS:

Abatement: Procedures to control fiber release from asbestos containing building materials. Includes removal, enclosure and encapsulation.

Air Monitoring: The process of measuring the asbestos fiber content of a specific volume of air in a stated period of time using methods approved or recommended by OSHA, EPA, or NIOSH.

Amended Water: Water to which a surfactant has been added to reduce airborne asbestos emissions.

Asbestos: The asbestiform varieties of serpentine (chrysotile), riebeckite (crocidolite), cummingtonite, grunerite (amosite), anthophyllite, actinolite, and tremolite.

Asbestos-Containing Roofing Materials (ACRM): Roofing materials either containing more than 0.1% by weight of asbestos or contaminated with friable asbestos to a degree that handling the materials may reasonably be expected to give rise to exposure to airborne asbestos fibers above regulated levels.

Authorized Visitor: Authorized representatives of the Building Owner, its representative, or a representative of any regulatory or other agency having jurisdiction over the project.

Building Owner's Asbestos Consultant: T. Brooks & Associates, a division of Provost & Pritchard Consulting Group.

Building Owner's Representative: Designated employee of Building Owner.

Competent Person: A person who has successfully completed an EPA -abatement supervisor training program and whose accreditation with state and federal regulatory agencies is current.

Disposal: All procedures necessary to transport and deposit the asbestos-contaminated material stripped and removed from the building to a waste disposal site in compliance with applicable Federal, State, and Local regulations.

Disposal Site: A site approved by the California Department of Public Health (CDPH) and the US Environmental Protection Agency (EPA) for the disposal of asbestos containing waste (Class I or II).

Encapsulation: All procedures necessary to coat all asbestos-containing materials with an encapsulant to prevent the dispersal of asbestos fibers into the air.

Encapsulant: A liquid which can be applied to asbestos-containing material and which reduces likelihood of possible release of fibers from the material by penetrating into the material and binding its components together, or which provides an impervious polymeric coating firmly bound to the ACM.

HEPA Filter: High Efficiency Particulate Air (absolute) filter capable of trapping and retaining 99.97% of particles with diameters than or equal to 0.3 micrometers. In no case shall the HEPA filter permit the discharge of air containing more than 0.01 asbestos structures/cc.

HEPA Vacuum Equipment: Vacuum equipped with a HEPA filter in the exhaust outlet, and so designed and maintained that 99.91% of all asbestos fibers (greater than or equal to 0.3 micrometers diameter) in the inlet air are collected and retained. In no case shall the HEPA

vacuum equipment permit the discharge of air containing more than 0.01 asbestos structures/cc.

HVAC: Heating, ventilation and air conditioning system.

Industrial Hygienist: A person qualified by training and/or expertise to specify measures for the recognition, evaluation, and control of occupational health hazards. In this project, an acceptable industrial hygienist must have substantial experience in the management of asbestos exposure.

PCM: Phase Contrast Microscopy according to NIOSH Method 7400.

Permissible Exposure Limit (PEL): Airborne concentration of asbestos in excess of 0.1 fibers per cubic centimeter (f/cc) of air as an eight hour time-weighted average (TWA) as determined by the method prescribed in the current California Occupational Safety and Health Standards.

Regulated Area: An area established by the employer to demarcate areas where Class I, II and III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work accumulate; and a work area within which airborne concentrations of asbestos, exceed or there is a reasonable possibility they may exceed the permissible exposure limit.

Removal: All procedures herein specified, as regulated by local, state, or federal agencies, or necessary to strip asbestos-containing material from designated areas in a safe manner and dispose of these materials at an acceptable disposal site.

Surfactant: A chemical wetting agent added to water to improve penetration, thus reducing the amount of water required for a given operation or area and enhancing the effect of the water in reducing fiber release.

TEM: Transmission Electron Microscopy according to AHERA specifications for Level II analysis.

Transport: Hauling of asbestos-containing wastes from the building to the disposal site and deposit of the wastes therein, in accordance with all Cal/EPA, CHP, Cal/OSHA or other applicable regulations.

Work Area: An isolated area of the building where abatement activities are performed.

Worker: Contractor employee who has completed course work and passed the exam for an EPA accredited AHERA asbestos abatement worker.

1.04 SUBMITTALS:

Approval by the Building Owner and/or it's designated representative is required of the following submittals, which shall be provided following award in compliance with the

Project Requirements. Submittals shall include all elements required by Building Owner the Project Design Professionals, as well as those herein stipulated, or as required by applicable regulations.

The successful contractor shall provide a submittal to the Building Owner and/or its Designated Representative before commencement of any project work, and before the project pre-roof construction conference that includes the following information:

1. Pre-Abatement Plan: Submit to the Building Owner and/or its Designated Representative a written work plan describing:
 - a. Methods of performing the removal work.
 - b. Schedule for asbestos related abatement work.
 - c. Plans for construction of isolation barriers and HVAC shut down.
 - d. Schedule of removal of debris.
 - e. Qualifications of firm to conduct Air Sampling Operations.
 - f. Locations of dumpster(s) or temporary storage of ACRM at site.
2. Notifications: Notify in writing the following agencies listed below:
 - a. Cal/OSHA District Office
 - b. San Joaquin Valley Air Pollution Control District (if required)
3. Supervisor Training: Submit written proof that all supervisors proposed for the project meet the criteria for a "competent person as defined under 8 CCR 1529 and have successfully completed an EPA - approved supervisor's training course in asbestos abatement, including the source of the training. Supervisor shall be EPA certified as a Contractor/Supervisor for asbestos and the State of California Certified under the Department of Industrial Relations.
4. Worker Training: Submit written proof that all employees have successfully completed an EPA - approved course in asbestos abatement and have had instruction on the hazards of asbestos exposure, on use and fitting of respirators, on protective dress, and on all aspects of work procedures and protective procedures including all topics listed in 8 CCR 1529 (0)(1)(a-c).
5. Written proof satisfactory that all employees have been examined by a licensed physician within the last year and have found to be physically suited to perform asbestos related work, including wearing a respirator and other PPE while performing vigorous labor.
6. Injury & Illness Prevention Program: Submit a written Injury and Illness Prevention Program in compliance with SB 198.
7. Air Monitoring Program: Submit a written description of the proposed air monitoring program for this project, including the names of the industrial hygienist, certified asbestos consultant, and/or air monitoring technicians, types of equipment, sampling procedures, calibration, record keeping, and analytical laboratory proposed.

Contractor Submittals During Construction Phase:

1. Daily Air Monitoring Results: Copies of all daily personal air monitoring results shall be submitted within 48 hours of completion of shift during which they are collected.

2. Copies of all applicable transport manifests and disposal receipts for all asbestos waste material.
3. Work shall not commence until required submittals have been approved.

1.05 PERSONNEL PROTECTION:

Training: Prior to commencement of work, all employees of the Contractor to be assigned to this project (including supervisors) shall be instructed, and shall be knowledgeable, in areas described in and those described in 8 CCR 1529. That training shall be equivalent to "AHERA Contractor/Supervisor and Abatement Worker" training.

Respiratory protection equipment, at a minimum, shall consist of a personally issued, individually identified NIOSH/MSHA approved half-face respirator equipped with HEPA filter cartridges. Additional respiratory protection shall be as required by CCR Title 8, Section 1529 and CFR 1926.

The Contractor shall have in place a respiratory protection program in accordance with the requirements of the California Occupational Safety and Health Standards. At a minimum, all workers shall be qualitatively fit-tested at time of respirator selection according to current regulations and shall have been fit-tested for each proposed respirator type during the proceeding eleven (12) month period.

The Contractor shall ensure that there is always a sufficient supply of replacement filters, of the type described above, and that filters are changed in accordance with regulatory requirements, or as required based on actual job conditions.

Outer work clothes shall consist of disposable full body coveralls.

The Contractor shall ensure that all employees that will wear a respirator during any part of the work are instructed on its proper use, including proper fitting, and changing of filters. Eating, drinking, and smoking while in any "regulated area" will not be permitted.

Except to the extent that more stringent requirements are written directly into the Contract Documents, or where required by Building Owner requirements, the following regulations and standards have the same force and effect (and are made part of the Contract Documents by reference) as if copied directly into the Contract Documents, or as if published copies were bound herewith. Where there is a conflict in requirements set forth in these regulations and standards, meet the more stringent requirement.

1. OSHA - U.S. Department of Labor Occupational Safety and Health Administration, Safety and Health Standards 29 CFR 1910, Section 1001 and Section 1910.134.29 CFR 1926.
2. Cal/OSHA - 8 CCR 1529.
3. NIOSH - National Institute for Occupational Safety and health under the provisions of 30 CFR Part II.

4. All other applicable local, state and federal regulations have jurisdiction over the work.
5. In addition to these requirements for the prevention of exposure to and dissemination of asbestos fibers, all applicable safety requirements, including electrical safety and fall protection shall be complied with by the Contractor and any subcontractors acting under its' direction. Contractor shall provide regulatory oversight over all subcontractors as stipulated under Cal/OSHA requirements.

Worker Changing Area: The room shall be located at ground level and shall have a curtained doorway to the outside. The Contractor shall be constructed to provide privacy from surrounding areas.

Shower waste-water shall be filtered prior to discharge to the sanitary sewer, with filtration acceptable to the Building Owner and the local water quality district. At minimum, all waste or shower water shall be run through a five micron (5µm) final filter. All requirements governing discharge of asbestos fibers to the sewer system shall be followed.

Worksite Entry: All contractor personnel and authorized visitors prior to entering the work area shall sign the entry log and put on protective clothing and a HEPA-equipped respirator for which they have received training and been approved by a licensed physician.

Worksite Exit: Each worker shall remove gross contamination from disposable or protective clothing before leaving the work area by HEPA vacuum. Remove all disposable or protective clothing (shorts may be worn under disposable or other protective clothing) and dispose of appropriately in labeled containers for disposal. Remove and dispose of respirator filter cartridges in labeled containers for disposal. The respirator shall be washed and rinsed.

Workers shall not eat, drink, smoke or chew gum or tobacco at the worksite except in areas designated by the Building Owner.

Decontamination, respiratory protection, and work procedures are to be followed by all Contractor employees and Authorized Visitors.

1.06 AIR MONITORING: INITIAL AND DAILY

Personal and perimeter air monitoring shall be conducted by the contractor on each day that work is conducted which involves the disturbance of asbestos-containing roofing materials. Personal monitoring may be conducted by abatement contractor if overseen by a qualified competent person familiar with air sampling operations. Perimeter monitoring may be conducted by independent, third-party Certified Asbestos Consultant (CAC), or Certified Site Surveillance Technician (SST) (acting under the direction of a CAC). Monitoring, shall be conducted for entire shift or as required under Cal/OSHA regulations. Perimeter monitoring may be performed by its Asbestos Consultant at the discretion of the Building Owner shall be conducted at ground level. Personal monitoring shall include both Excursion (30 minute) and Full Shift monitoring per OSHA requirements.

If it is found that airborne fiber levels of personal air samples have exceeded the Permissible Exposure Limits of 1.0 f/cc (30 minute excursion monitoring) or 0.1 fibers per cubic centimeter (f/cc) over an eight (8) hour time weighted average, the Contractor shall be required to take additional measures as required by the Building Owner or its Representative as required to reduce airborne levels below the PEL's. All air samples found to exceed any PEL shall be re-analyzed by TEM method. TEM analysis shall be conducted at laboratory selected by the Building Owner. Such additional testing shall be performed for each occurrence by an approved and accredited laboratory using Transmission Electron Microscopy (TEM), to determine the actual asbestos content. This additional analysis shall be completed at no cost to the Building Owner. Contractor shall pay Asbestos Consultant directly for all costs related to re-analysis by TEM method, including lab fees, consultant services, etc.

Personal air monitoring shall be conducted specifically on those individuals working at the point where the asbestos-containing materials are being removed.

Air monitoring shall be performed by individuals and firms qualified and knowledgeable in air sampling operations, and knowledgeable in asbestos abatement operations. The firm and/or individual providing air monitoring on the project shall be acceptable to the Building Owner, and Asbestos Consultant Representative. Contractor shall provide qualifications of air monitoring firm and specific individual performing the monitoring as requested by the Building Owner prior to the start of asbestos related work.

The Contractor shall insure that all samples shall be taken under standard industry protocol and tested at a laboratory which is accredited by the American Industrial Hygiene Association and participating in the Proficiency in Analytical Testing (PAT) Program of the National Institute for Occupational Safety and Health.

A copy of the results of all air monitoring performed by the Contractor shall be submitted to the Building Owner within forty-eight (48) hours of end of shift during which they were collected.

PART 2 – PRODUCTS

2.01 GENERAL MATERIALS:

Plastic Sheeting: Shall be min 6-mils thick and fire-resistant polyethylene sized in lengths and widths to minimize the frequency of joints.

Tape: Shall be capable of sealing joints of adjacent sheets of plastic and of attachment of plastic sheets to finished or unfinished surfaces of dissimilar materials and shall be capable of adhering under dry and wet conditions, including use of amended water.

Disposal Containers: Shall be suitable to receive and retain any asbestos-containing materials until disposed of at an approved site. All dumpsters or temporary storage containers for storing ACRM contaminated materials shall be lined with one layer of 10 mil

polyethylene and sealed before transport in accordance with local, state and federal requirements, and the requirements of the designated landfill.

Wetting Agent: Shall consist of 50% polyoxyethylene and 50% polyethylene ester, or equivalent, and shall be mixed with water at concentration of one ounce wetting agent to 5 gallons of water (or as recommended by the manufacturer) to produce amended water.

Warning Labels & Signs: Shall be as required by EPA, OSHA, and Health and Welfare Agency (Prop 65) regulations.

HEPA Vacuum: A high efficiency particulate air (HEPA) filtered vacuum capable of trapping and retaining 99.97% of all particles larger than 0.3 microns.

Other Materials: The Contractor shall furnish all materials required to complete the abatement related work. Costs for such materials and equipment shall be reflected in Contractor's bid.

PART 3 EXECUTION**3.01 JOB SITE POSTING:**

Job Site Documents: The Contractor shall provide and post the following documents at the project site:

1. All project plans and specifications including addenda and change orders.
2. Copies of Material Safety Data sheets for all materials used on the project.
3. List of all AHERA competent supervisors and workers.
4. Written Injury and Illness Prevention program.
5. Written respiratory protection program.
6. Sign-in sheet for all persons entering a "Regulated Area".
7. All documents required by Cal/OSHA or any other regulatory agency having jurisdiction over the work.

3.02 WORK AREA ISOLATION:

Work areas of the will be isolated off from rest of structure.

Contractor shall post danger signs meeting the requirements of Cal/OSHA regulations (8 CCR 1529), and California Health & Safety Code Section 25916 et seq. at any location and all approaches to the location where airborne concentrations of asbestos may exceed ambient background levels. Signs shall be posted at a distance sufficiently far enough away from the work area to permit an employee or visitor to read the sign and take necessary protective measures to avoid exposure or as required by Cal/OSHA.

Seal off all drains and other building openings between the work area and the interior of the building with 6 mil polyethylene and duct tape in accordance with Cal/OSHA requirements. The Contractor shall inspect all building openings at the beginning of each day and periodically during the work period.

The Contractor shall limit access to the work area to his personnel, emergency services personnel and Authorized Visitors. A log book of all visitors who enter the work area must be kept recording the name, affiliation, time in and time out for each visitor.

Adequate portable fire extinguisher equipment shall be maintained within the work area as defined by OSHA and/or local fire department officials. Fire extinguishers shall be fully charged and currently certified as required by law. Fire extinguishers shall be spaced throughout the roof to be readily accessible in the event of a fire.

3.03 REMOVAL:

When cleaning roof surface, do not use tools or devices which would cause debris to become airborne i.e., brooms, blowers, high pressure rinse, etc. Asbestos-containing dust and debris shall be maintained in wetted condition while being disturbed. No dry sweeping of ACRM contaminated will be allowed.

Adequately wet ACRM with amended water prior to the initiation of the removal process. Amended water shall be applied periodically during the work period to suppress dust in keeping with Cal/OSHA requirements.

The wetting solution shall be applied with low-pressure equipment or a water hose with a shut-off nozzle to avoid displacement and dispersal of asbestos fibers.

Contractor shall protect roof mounted equipment and cables within raceways.

All asbestos-containing roofing materials will be carried to the edge of the roof where off loading and transport will take place by means of a hoist, ramp, crane, or forklift. No dropping of ACRM from the roof will be permitted.

Carefully lower properly wetted asbestos-containing material that has been removed in units or sections to the ground without dropping or throwing into the designated receptacle.

A waste chute shall not be used for offloading of ACM roofing.

While still wet, roofing debris must be placed into plastic lined and properly labeled disposal containers.

At the end of each work shift, no loose ACRM debris shall remain on the roof.

3.04 DISPOSAL:

THE CONTRACTOR SHALL BE FULLY RESPONSIBLE FOR THE ULTIMATE DISPOSAL OF ASBESTOS WASTES AT AN APPROVED DISPOSAL SITE ACCORDING TO APPLICABLE REGULATIONS. This will include preparation and distribution of Non-Hazardous Waste Manifests with the signature approval of the Building Owner.

Copies of all waste manifests and disposal receipts shall be submitted to the Building Owner as a close-out submittal.

3.05 CLEANUP:

Remove all visible accumulations of asbestos material and debris. Wet clean and HEPA vacuum all substrates within the work area. Clean all dust from roof elements upon completion of work.

END OF SECTION

ASBESTOS ABATEMENT**PART 1 GENERAL**

DIVISIONS 00 & 01 ARE A PART OF THIS SECTION

1.01 SUMMARY OF SCOPE OF WORK**General**

The contractor shall review the project design documents to determine the scope of work and to determine where determined, assumed or presumed asbestos-containing materials (PACM'S) will be impacted based on the specified scope of demolition work as defined in the design documents.

The contractor performing the work shall be aware that the asbestos survey as performed for the project did not include exterior below-grade building materials with the exception of roofing systems and window glazing. The contractor shall be aware of the potential presence of these materials at locations at the specified building as well as between buildings located at the site. The contractor shall request additional information and/or conduct additional testing as required to determine the possible presence and location(s) of these materials.

Asbestos Abatement Contractor shall supply all labor, materials, equipment, insurance, transport and disposal to remove all identified, assumed, or presumed asbestos-containing building (PACM) materials and ACCM's) from specified interior and exterior locations at specified portions at subject site as required to complete the specified scope of work defined in the project design documents. Asbestos Abatement Contractor shall provide documentation that it is:

1. Currently certified for Asbestos Work by California State Contractor's Licensing Board.
2. Currently registered for Asbestos Work with the State of California, Division Occupational Safety and Health.

At least one full-time employee on each workshift shall be currently accredited as an EPA Contractor/Supervisor and shall have successfully completed, in the preceding calendar year, a course of instruction meeting the requirements for "Competent Person" (29 CFR 1926.1101(e)(ii) and (8 CCR 1529). Such person shall have knowledge and authority to act as "Competent Person" as defined by Title 8 CCR 1529 and CFR 1926.1101. The Supervisor shall be certified by the State of California as a Contractor/Supervisor and shall comply with 40 CFR 763 (AHERA) and TSCA and shall provide evidence of such training and certification.

The Asbestos Abatement Contractor shall maintain documentation on file that all Asbestos Abatement Contractor's employees meet the training requirements of Federal, State, and Local regulations. As a minimum, asbestos worker training shall comply with 40 CFR 763 (AHERA) and TSCA and shall demonstrate evidence of such training by maintaining current refresher training equivalent to the required level of training.

All work shall be conducted in accordance with applicable regulations, including but not limited to 40 CFR 763 (AHERA), 29 CFR 1926.1101 (OSHA), 40 CFR Part 61 (NESHAPS) and Title 8 CCR 1529 (Cal/OSHA Asbestos In Construction Standard), including mandatory and non-mandatory appendices as applicable, and the requirements of the San Joaquin Valley Air Pollution Control District regulations.

The contractor shall be aware that the previous asbestos survey prepared by TBA/P&P (dated 02/16/23) may not consider the presence of ACM at locations behind walls, above ceilings and below floors, as well as other locations not visually apparent at the time the field investigation was performed. Also, testing of below-grade piping and associated elements, building footings, operational boilers and related mechanical equipment and other related elements was excluded from the site evaluation but may be present. The contractor should contact the building owner for information concerning the presence and locations of these materials.

1.02 SCOPE OF WORK: ASBESTOS ABATEMENT

Contractor shall review Asbestos Survey Report (attached as an **Appendix** to this specification) prepared by T. Brooks & Associates, a division of Provost & Pritchard Consulting Group to determine locations of identified, “presumed” or “assumed” asbestos-containing building materials (ACBM’s) and Asbestos-Containing Construction Materials (as confirmed by Point Count) which will be impacted based on the proposed scope of work and project design documents.

All work involving disturbance of asbestos-containing materials shall be conducted using work methods and controls herein identified and/or as required under local, state, and federal regulations. Abatement work shall be conducted in accordance with applicable regulations and these specifications in a manner which protects the health and safety of abatement workers, other trades, district employees, the general public, and others during the work. ACBM’s shall be wetted continuously during abatement operations to preclude generation of airborne dust and visible emissions.

At no time shall non-asbestos trained and certified, unprotected workers or others enter any established “Regulated Area” or participate in work operations for which they are not specifically trained and licensed, and for which hazards exist for which they are not protected.

Contractor shall thoroughly review all project design documents, including but not limited to: project design drawings, project specifications, project addendums, and previous asbestos survey report prepared by TBA/P&P to determine locations of ACBM’s (identified, presumed or assumed) and ACCM’s as specified and/or impacted in order to complete the specified scope of work as included in the design documents. Contractor shall not request additional compensation or extension of contract based upon their failure to accurately determine the scope of work based upon their review of all project design documents, previous asbestos survey, available data, and field verification of quantities, locations, and existing conditions affecting completion of the work. Contractor shall request additional information from Building Owner as relates to suspect ACM’s not considered as part of the previous asbestos survey.

While the survey report includes identified, assumed or presumed ACM and ACCM on a building by building basis at the specified school site, for those portions of the site to be impacted by the work, the Contractor shall be responsible for accurate determination of

material quantities, locations, and all conditions effecting their proper execution of the work under the Agreement.

The contractor shall be aware that those buildings at the subject school site as referenced in the asbestos survey report are divided into two (2) distinct groups in the asbestos survey report. These include buildings labeled as "Comprehensive Building Surveys", and those labeled as "Limited Building Surveys". The scope of sampling varies based on these categories. Refer to the survey report for additional information.

Scope of work may include disassembly of existing building systems, components, building elements, and equipment to access ACBM's for purposes of abatement, or to complete the specified scope of work under the contract. Contractor shall perform all disassembly and reassembly of building elements as required to complete the specified scope of work as directed by the Building Owner (Owner).

Perimeter air monitoring may be conducted by the Owner's Asbestos Representative during abatement phase to ensure worker and site safety, and to ensure suitability and effectiveness of means utilized by Contractor in the performance of the work. This sampling shall not relieve Asbestos Abatement Contractor of responsibility of performing representative personal air sampling per Cal/OSHA requirements and these specifications. Personal air sampling shall be conducted in accordance with Title 8 CCR 1529 and the requirements of this specification. Failure of Contractor to perform personal air sampling operations to satisfaction of Owner's Asbestos Representative, or failure to provide laboratory results within stipulated time period (48 hrs. of end of shift during which they were collected) shall allow Building Owner to have independent, personal air monitoring operations conducted on its behalf, and to deduct cost from monies owed to Contractor under the Agreement. Costs may include Owner's Asbestos Consultant Representative's costs, including but not limited to field time, use of equipment, laboratory supplies, shipping charges, and fees associated with laboratory analysis, including RUSH analysis of laboratory samples collected for the purposes of determining contractor's compliance with the project design documents and these specifications.

Owner shall approve in writing all additional, unforeseen abatement work necessitating a change in contract price. Cost for such work shall be agreed upon by Contractor and Owner prior to initiating or altering work effecting such materials. Negotiated costs shall be all inclusive and shall reflect all costs including labor, materials, insurance, disposal, overhead and profit, etc.

A final visual inspection shall be conducted by the Owner's Asbestos Representative upon notification of completion of abatement work per buildings at the specified site. Successful passage of final visual inspection will be required as a prerequisite of completion of abatement related work prior to proceeding with non-abatement portions of the work. Final Air Clearances will be performed by the Owner's Asbestos Consultant Representative on its behalf unless the project requires air clearances to be included in the cost provided by the contractor and provided by a third-party consultant on its behalf. Refer to the enclosed Clearance Section for clearance requirements. All air clearances shall meet AHERA requirements under 40 CFR Part 763, Subpart E.

Owner's Asbestos Representative shall be notified when abatement work has been completed in order to schedule final visual inspections. Notification shall be a minimum of twenty-four (24) hours prior to requested final visual inspection. Final Visual Clearance Form shall be signed by

Owner's Designated Representative and Contractor Representative for each individual final visual inspection performed as part of the project.

While efforts have been made to accurately list ACM quantities and locations, the Contractor has the responsibility to verify quantity and quality of conditions based upon review of all project design documents, review of previous asbestos survey report and thorough examination of each location where abatement work will be conducted based upon the project scope of work. Contractor shall be knowledgeable of limitations of survey report as stated in report and these specifications, and shall request additional information from Owner as required to provide a comprehensive bid for the work.

All materials to be abated shall be maintained in wetted condition throughout the abatement process, and shall be wetted when placed in sealed bags prior to being sealed.

All removed ACM's will be double-bagged in accordance with these specifications and regulatory requirements, labeled, and transported to an appropriate disposal site. Labeling of all waste bags or on-site storage containers which include ACM shall be in accordance with Title 8 CCR 1529 requirements while on the jobsite.

Personal air samples (collected by the Contractor or its employees) will be analyzed utilizing PCM (NIOSH 7400) methodology. Asbestos Abatement Contractor's personal air monitoring results shall be provided to Owner's Asbestos Representative within forty-eight (48) hours of shift during which the samples were collected. Should personal or excursion samples exceed any PEL. Owner's Asbestos Representative retains the right to require RUSH turn-around of future air samples until results are consistently below the OSHA PEL's. Costs of RUSH analysis and associated costs shall be the responsibility of the Contractor. Contractor shall not request additional compensation for compliance with this provision.

Upon successful passage of Final Visual Inspection and Final Air Clearance(s), (per containment area) affected areas shall be made accessible to non-abatement Contractors for completion of non-abatement related work. Results shall not pertain to areas outside of the areas reflected by the final visual inspection and/or Final Air Clearance.

All work performed under the contract shall be conducted during hours as directed by the Building Owner. Owner shall mandate schedule based on its needs, and in a manner most conducive to complete all work associated with the project in a timely manner and in a sequence which suits the needs and preferences of the Owner and the Supervising Contractor. Asbestos Abatement Contractor agrees to sequence their work in a manner prescribed by the Owner and/or the Supervising Contractor and to cooperate with other Contractors in this regard.

Potential asbestos hazard/General Contractor Supervision

1. Contractor shall educate all workers, supervisory personnel, other contractors, and others at the jobsite of the nature of the work hazards and of proper work procedures which must be followed to protect themselves from asbestos hazards.
2. In compliance with Title 8 CCR 1529, the Prime Contractor shall provide general supervisory authority over all work performed by the Asbestos Abatement Contractor and shall provide oversight of all work performed by them. Refer to

8 CCR 1529 for description of duties and responsibilities of prime contractors engaged in asbestos removal projects.

1.03 LIMITATIONS - ASBESTOS ABATEMENT

APPLICABLE TO ALL SECTIONS OF SPECIFICATIONS FOR ASBESTOS ABATEMENT

SUMMARY

This Specification is specifically intended for use on the project indicated.

Where the term "Asbestos Abatement Contractor" is used throughout these specifications, it is meant to refer to the entity doing the asbestos related work whether it is the Prime Contractor or an abatement subcontractor.

New legislation, regulations or case law may supersede portions of this Specification. Such superseding facts become, in effect, currently "applicable" laws, regulations and good practice within the intent of this Specification.

In case of discrepancies in this Specification, the strictest law, regulation, standard or good practice shall apply.

If new facts or discrepancies are evident to bidders prior to submission of the bid, they shall be brought to the attention of the Owner so that the necessary addenda making amendments or corrections can be issued to all bidders.

Indications of quantity or quality of drawings are intended to be approximations of actual conditions. Bidder has the obligation to accurately assess quantities, quality, and accuracy of all such information prior to submitting a bid for the work. Such determination shall be made during initial or subsequent site visits (if permitted), review of all design documents, including all project construction drawings, all specification sections, addendums, and other relevant documents.

Contractor shall not submit a claim or "change order" for their failure to accurately determine the scope of abatement work based on the examination of the project site, and review of all relevant project documents. Contractor shall consider time schedules, delays, and other issues based on thorough review of scope of abatement work.

Abbreviations and Acronyms

ACBM: Asbestos-Containing Building Material

ACM: Asbestos-Containing Material

ACCM: Asbestos-Containing Construction Material

APCD: Air Pollution Control District

AQMD: Air Quality Management District

AHERA: Asbestos Hazard Emergency Response Act, 40 CFR 763 Part F

AIHA: American Industrial Hygiene Association

ANSI: American national Standards Institute

ASA: American Standards Association

ASTM: American Society for Testing & Materials

CFR: Code of Federal Regulations

CERCLA: Comprehensive Environmental Response, Compensation and Liability Act (42 USC 9601ff)

CIH: Certified Industrial Hygienist

DOT: U.S. Department of Transportation

EPA: Environmental Protection Agency

F/CC: Fibers per cubic centimeter (or air)

FR: Federal Register

G(C)FI: Ground (Circuit) Fault Interrupter

HEPA: High Efficiency Particulate Air (filter with 99.99 efficiency to 3 microns).

HVAC: Heating, ventilation and air conditioning system

IH: Industrial Hygienist

MSDS: Material Safety Data Sheet

OSHA: Occupational Safety and Health Administration

NAM: Negative Air (Filtration) Machine

NEC: National Electrical Code

NESHAPS: National Emission Standards for Hazardous Air Pollutants (40 CFR Part 61)

NFPA: National Fire Protection Association

NIOSH: National Institute of Occupational Safety and Health

OWNER: Bakersfield City School District

OWNER'S ASBESTOS REPRESENTATIVE: T. Brooks & Associates, a Division of Provost & Pritchard Consulting Group

PAPR: Powered Air-Purifying Respirator

PCM: Phase Contract Microscopy (Air Sample Analysis)

PLM: Polarized Light Microscopy (Bulk Sample Analysis)

RCRA: Resource Conservation and Recovery Act

SSN: Social Security Number

BA/P&P: T. Brooks & Associates, a division of Provost & Pritchard Consulting Group

TEM: Transmission Electron Microscopy

USC: United States Code

Abbreviations and Acronyms - California

CAC: California Administrative Code

Cal/OSHA: California Division of Occupational Safety and Health

CSC: Construction Safety Orders

DOSH: Division of Occupational Safety and Health

CDPH: California Department of Public Health

GISO: General Industry Safety Orders

1.04 DEFINITIONS – GENERAL

Abatement: Procedure to control fiber release from ACBM's. Includes removal, encapsulation, enclosure, repair, demolition and renovation activities.

Aggressive Sampling: Use of air moving equipment such as a leaf-blower and fans to re-entrain particulate prior to clearance sampling in a method substantially similar to that outlined in Appendix A of 40 CFR 763.90.

Airlock: A system for permitting ingress and egress with minimum air movement between a contaminated area and an uncontaminated area, typically consisting of two curtained doorways separated by a distance of at least 3 feet such that one passes through one doorway into the airlock, allowing the doorway sheeting to overlap and close off the opening before proceeding through the second doorway, thereby preventing flow-through contamination.

Air Monitoring: The process of measuring the fiber content of a known volume of air collected during a specific period of time as mandated by Appendix E of 29 CFR 1926 and 40 CFR 763.

Air Clearance: "Final Air Clearances" conducted in accordance with Appendix E of 40 CFR 763. TEM AHERA method will be utilized unless indicated otherwise.

Air Sampling Professional: The professional contracted or employed by Owner to supervise and/or conduct air monitoring and analysis schemes.

Amended Water: Water to which a surfactant has been added.

Applicable Laws: Laws, regulations and government guidelines for the protection of the environment, workers and others as adopted by specific jurisdictions including, but not limited to, federal, state, county, city and special enforcement districts which include AQMD/APCD, DOT, EPA, OSHA and NIOSH.

Asbestos: The asbestiform varieties of serpentine (chrysotile), riebeckite (crocidolite), cummingtonite - grunerite (amosite), anthophyllite, actinolite and tremolite.

Asbestos-Containing Material (ACM): Material composed of asbestos of any type and in an amount greater than 1% by weight analyzed using the method as described in Appendix "A" subpart "F" 40 CFR Part 763 Section 1, Polarized Light Microscopy.

Asbestos-Containing Building Material (ACBM): Building material containing greater than 1.0% asbestos by weight found in or on interior structural members or other parts of a building.

Asbestos-Containing Construction Material (ACCM): Material containing asbestos in an amount between 0.1% - 1.0% by weight.

Asbestos-Containing Waste Material: Any material which is or is suspected of being or any material contaminated with an asbestos-containing material which is to be removed from a work area for disposal.

Asbestos Debris: Pieces of ACBM that can be identified by color, texture, or composition, or means dust, if the dust is determined by an accredited inspector to be ACM.

Asbestos Project Manager: An individual qualified by virtue of experience and education, designated as Owner's Asbestos Representative and responsible for overseeing the asbestos abatement project.

Authorized Visitor: Building Owner or it's Representatives, and any representative of a regulatory or other agency having jurisdiction over the project.

Barrier: Any surface that seals off the work area to inhibit the movement of fibers.

Breathing Zone: A hemisphere forward of the shoulders with a radius of approximately 6 to 9 inches.

Category I: NESHAPS 1990 Final rule, "non-friable ACM are resilient floor covering, roofing products, gaskets, and packings. If these materials are in poor condition and are friable or they are subject to sanding, grinding, cutting, or abrading they are to be treated as friable material.

Category II: "Non-friable material ACM, excluding Category I, that meets the definition the same as Category I.

Ceiling Concentration: The concentration of an airborne substance that shall not be exceeded.

Certified Industrial Hygienist (C.I.H.): An industrial hygienist certified in Comprehensive Practice by the American Board of Industrial Hygiene.

Clean Room: An uncontaminated area or room which is a part of the work decontamination enclosure system with provisions for storage of worker's street clothes and clean protective equipment.

Competent Person/Contractor Supervisor: The individual working on behalf of the Asbestos Abatement Contractor, normally the Project Foreman. Individuals must have training equivalent to AHERA Contractor/Supervisor. Training must be by EPA accredited training provider.

Contractor: The individual and/or legal entity and its subcontractors and employees of the contractor and subcontractor awarded the contract. As used in this Specification, "Contractor" means, in addition to the actual license holder, any administrative or supervisory personnel having authority to act for the license holder on this project.

Curtained Doorway: A device to allow ingress or egress from one room to another while permitting minimal air movement between the rooms, typically constructed by placing two overlapping sheets of plastic over an existing or temporarily framed doorway, securing the vertical edge of one sheet along one vertical side of the doorway and securing the vertical edge of the other sheet along the opposite vertical side of the doorway.

Decontamination Enclosure System: A series of connected rooms, separated from the work area and from each other by air locks, for the decontamination of worker and equipment.

Demolition: The wrecking or taking out of any load-supporting structural member of a facility together with any related handling operations.

Disposal Bag: A properly labeled 6 mil thick leak-tight plastic bags used for transporting asbestos waste from work and to disposal site as defined in OSHA appendix G to 29 CFR 1226.58 and NESHAPS 40 CFR part 61 subpart "M" 1990 Final Rule.

Encapsulant: A liquid material applied to asbestos containing material which controls the possible release of asbestos fibers from the material either by creating a membrane over the surface (bridging encapsulant) or by penetrating into the material and binding its components together (penetrating encapsulant).

1. **Bridging encapsulant:** an encapsulant that forms a discrete layer on the surface of an in situ asbestos matrix.
2. **Penetrating encapsulant:** an encapsulant that is absorbed by the in situ asbestos matrix without leaving a discrete surface layer.
3. **Removal encapsulant:** a penetrating encapsulant specifically designed to minimize fiber release during removal of ACBM's rather than for in situ encapsulation.

Encapsulation: The application of an encapsulant to asbestos containing materials to control the release of asbestos fibers into the air.

Enclosure: The construction of an air-tight, impermeable, permanent barrier around asbestos-containing material to control the release of asbestos fibers into the air.

Equipment Decontamination Enclosure System: That portion of a decontamination enclosure system designed for controlled transfer of materials and equipment into or out of the work area, typically consisting of a washroom and holding area.

Facility: Any institutional, commercial or industrial structure, installation or building.

Facility Component: Any pipe, duct, boiler, tank, reactor, turbine or furnace at or in a facility, or any structural member of a facility.

Filter: A media component used in respirators to remove solid or liquid particles from the inspired air.

Fixed Object: A piece of equipment or furniture in the work area which cannot be removed from the work area.

Friable Asbestos Material: Asbestos containing material which can be crumbled to dust, when dry, under hand pressure and contains >1% asbestos by weight.

Glovebag Technique: A method with limited applications for removing small amounts of friable asbestos-containing material from ducts, short piping runs, valves, joints, elbows and other non-planar surfaces in a non-contaminated (plasticized) work area.

HEPA Filter: A High Efficiency Particulate Air (HEPA) filter capable of trapping and retaining 99.97% of asbestos fibers greater than 0.3 microns in diameter.

HEPA Filter Vacuum Collection Equipment (or vacuum cleaner): High efficiency particulate air filtered vacuum collection equipment with a filter system capable of collecting and retaining asbestos fibers. Filters should be of 99.97% efficiency for retaining fibers of 0.3 microns or larger.

High-efficiency particulate air filter: (HEPA) refers to a filtering system capable of trapping and retaining 99.97 percent of all mono-dispersed particles 0.3 um in diameter or larger.

Negative Pressure Respirator: A respirator in which the air pressure inside the respiratory-inlet covering is positive during exhalation in relation to the air pressure of the outside atmosphere and negative during inhalation in relation to the air pressure of the outside atmosphere.

Holding Area: A chamber in the equipment decontamination enclosure located between the washroom and an uncontaminated area. The holding area comprises an airlock.

“Monitoring”: Includes a) Visual inspection for the present of visible debris or emissions; b) Air sampling and analysis to determine f/cc inside and outside the work area; c) Bulk sample analysis of encapsulated materials; d) Performance evaluation of work methods, procedures and employees.

Movable Object: A piece of equipment or furniture in the work area which can be removed from the work area.

Negative Pressure Ventilation System: A portable exhaust system equipped with HEPA filtration and capable of maintaining a constant low velocity air flow into contaminated areas from adjacent uncontaminated areas.

Outside Air: The air outside buildings and structures.

Owner: The owner of the facility or site. As used in this Specification, "Owner" is Bakersfield City School District.

Personnel Monitoring: Air sampling taken in the operator breathing zone (OBZ) of an asbestos worker to comply with OSHA regulations.

Plasticize: To cover floors and walls with plastic sheeting as herein specified.

Pressure Differential and Ventilation System: A local exhaust system, utilizing HEPA filtration capable of maintaining a pressure differential with the inside of the Work Area at a lower pressure than any adjacent area, and which cleans re-circulated air or generates a constant air flow from adjacent areas into the Work Area.

Protection Factor: The ratio of the ambient concentration of an airborne substance to the concentration of the substance inside the respirator at the breathing zone of the wearer. The protection factor is a measure of the degree of protection provided by respirator to the wearer.

RACM: Regulated Asbestos-Containing Material means: a) Friable asbestos Material, b) Category I nonfriable ACM that has become friable, c) Category I nonfriable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading, or d) or has become crumbled, pulverized or reduced to powder by the forces expected to act on the material in the course of demolition or renovation operations regulated by 40 CFR part 60 subpart "M" 1990 Final Rule.

Prior Experience: Experience required of the Asbestos Abatement Contractor on asbestos projects of similar nature and scope to insure capability of performing the asbestos abatement in a satisfactory manner. Similarities shall be in areas related to material composition, project size, abatement methods required, number of employees and the engineering, work practice and personal protection controls required.

Regulated Areas: Area established to demarcate areas where airborne concentrations of asbestos may exceed the permissible exposure limit (29 CFR 1926.1101).

Removal: The stripping of any asbestos containing materials from surfaces of components of a facility.

Renovation: Altering in any way one or more facility components. Operations in which load-supporting structural members are wrecked or taken out are excluded.

Respirator: A device designed to protect the wearer from the inhalation of harmful atmospheres.

Shower Room: A room between the clean room and the equipment room in the worker decontamination enclosure with hot and cold or warm running water controllable at the tap and suitably arranged for complete showering during decontamination.

Staging Area: Either the holding area or some area near the waste transfer airlock where containerized asbestos waste has been placed prior to removal from the work area.

Strip: To take off friable asbestos materials from any part of a facility.

Structural Member: Any load-bearing member of a facility, such as beams and load-supporting walls or any non-load-supporting member, such as ceilings and non-load supporting walls.

Surfactant: A chemical wetting agent added to water to improve penetration.

Time Weighted Average (TWA): The average concentration of a contaminant in air during a specific time period.

Visible Emissions: Any Emissions containing particulate asbestos materials that are visually detectable without the aid of instruments.

Waste Transfer Airlock: A decontamination system utilized for transferring containerized waste from inside to outside of the work area.

Wet Cleaning: The process of eliminating asbestos contamination from building surfaces and objects by using cloths, mops, or other utensils which have been dampened with water and surfactant.

Work Area: Designated rooms, spaces, or areas of the project in which asbestos abatement actions are to be undertaken or which may become contaminated as a result of such abatement actions or which are used by the Asbestos Abatement Contractor for ancillary operations such as offices, storage, mobilization or channelization. The work area is generally the portion of the facility which is under control of the Asbestos Abatement Contractor during the project.

Worker Decontamination Enclosure: A decontamination system consisting of a clean room, a shower room, and an equipment room separated from each other and from the work area airlocks and contained doorways. This system is used for all worker entries to and exits from the work area and for equipment and waste pass out for small jobs.

1.05 REFERENCE STANDARDS - ASBESTOS ABATEMENT

Summary

This sub-section sets forth governmental regulations and industry standards which are included and incorporated herein by reference and made a part of the specification.

This sub-section also sets forth those notices and permits which are known to Owner, and which either must be applied for and received, or which must be given to governmental agencies before start of work.

Requirements include adherence to work practices and procedures set forth in applicable codes, regulations and standards.

Requirements include obtaining permits, licenses, inspections, releases and similar documentation, as well as payments, statements and similar requirements associated with codes, regulations and standards.

CODES AND REGULATIONS

General Applicability of Codes and Regulation and Standards: Except to the extent that more explicit or more stringent requirements are written directly into the contract documents, all applicable codes, regulations and standards have the same force and effect (and are made a part of the contract documents by reference) as if copied directly into the contract documents, or as if published copies are bound herewith.

Asbestos Abatement Contractor Responsibility: The Asbestos Abatement Contractor shall assume full responsibility and liability for the compliance with all applicable Federal, State, and local regulations pertaining to work practices, hauling, disposal, and protection of workers, building occupants, visitors to the site, and persons occupying areas adjacent to the site.

The Asbestos Abatement Contractor is responsible for providing medial examinations and maintaining medical records of personnel as required by the applicable Federal, Sate and local regulations.

The Asbestos Abatement Contractor shall hold Owner, or its Representatives harmless for failure to comply with any applicable work, hauling, disposal, safety, health or other regulation on the part of himself, his employees, or his subcontractors.

Applicable Publications

The publications listed below forms a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

Code of Federal Regulations (CFR)

U.S. Department of Labor

1. 29 CFR 1910.20: Access to Employee Exposure and Medical Records
2. 29 CFR 1910.134: Respiratory Protection
3. 29 CFR 1910.145: Specification for Accident Prevention Signs and Tags
4. 29 CFR 1910.1001: Occupational Exposure to Asbestos
5. 29 CFR 1910.1200: Hazard Communication
6. 29 CFR 1926.1101: Asbestos Tremolite, Anthophyllite and Actinolite

U.S. Environmental Protection Agency

1. 40 CFR 61: General Provisions Subpart A
2. 40 CFR 61: National Emission Standard for Asbestos, Subpart M
3. 40 CFR 61.152: Standard for Waste disposal for Manufacturing Demolition, Renovation, Spraying and Fabricating Operations
4. 40 CFR 241: Guidelines for the Land Disposal of Solid Waste
5. 40 CFR 257: Criteria for Classification of Solid Waste Disposal Facilities
6. 40 CFR 763: Subpart E, Asbestos Containing Materials in Schools
7. 40 CFR 763: Appendix C to Subpart E Asbestos Model Accreditation Plan
8. EPA-560-OPTS-86-00: A Guide to Respiratory Protection for the Asbestos Abatement Industry
9. EPA-560/5-85-024: Guidance for Controlling ACM's in 1985)

U.S. Department of Transportation

1. 49 CFR 173.1090: Shippers - General Requirements for Shipments and Packaging
2. 49 CFR 177.844: Carriage by Public Highway

American National Standards Institute (ANSI)

1. Z9.2-79: Fundamentals Governing the Design and Operation of Local Exhaust Systems
2. Z88.2-80: Practices for Respiratory Protection

American Society for Testing Materials (ASTM)

1. E-849-82: Safety and Health Requirements Relating to Occupational Exposure to Asbestos
2. P-189: Specification for Encapsulants for Friable ACM

National Fire Protection Association (NFPA)

1. Standard 90A Installation of Air Conditioning and Ventilation Systems

National Institute of Occupational Safety and Health (NIOSH)

1. Manual of Analytical Physical and Chemical Analysis Method (P&CAM) Methods, 2nd Edition, Vol. I,
2. Method 7400: Fibers (NI1, 3rd Edition, Vol. I)

Underwriters Laboratories, Inc. (UL)

1. 586-77 (R-1982): Test Performance of High Efficiency, Particulate, Air Filter Units

1.06 SUBMITTALS - ASBESTOS ABATEMENT

Contractor Submittals (Following Award)

Copy of current State of California, Contractor License

Copy of current Contractor License to perform asbestos related work in California

Copies of current AHERA accreditation for all Asbestos Abatement Contractor, Abatement Contractor/Supervisor(s) and Asbestos Workers

Copy of current registration with DOSH/Cal/OSHA for Asbestos Work in California

Current copies of Employee Medical Clearances (within last 12 months)

Company Illness and Injury Prevention Plan

Company Respiratory Protection Plan

Copy of Standard Forms – Section 02 82 14

Representative and Warranties

By submitting bid, Asbestos Abatement Contractor/bidder represents and warrants to Owner that:

Asbestos Abatement Contractor is completely familiar with all applicable laws, regulations and guidelines of the varying jurisdictions in which the work is to be done.

Asbestos Abatement Contractor and the Contractor shall protect and keep Owner and T. Brooks & Associates, a division of Provost & Pritchard Consulting Group, and their agents and employees, harmless and free from all liability, penalties, fines, losses, damages, costs, expenses, causes of action, claims or judgement resulting from injury, harm or exposure in any manner to asbestos, asbestos-containing materials, fibrous asbestos and airborne asbestos fibers, to any persons or property arising out of or in any way connected with the performance of work under this Contract, and shall indemnify said parties from any claims, suits or actions therefrom, including attorney's fees.

The Contractor shall further hold harmless Owner and T. Brooks & Associates, a division of Provost & Pritchard Consulting Group free from liability or claims for any injuries to a death of Contractor's or subcontractor's employees resulting from any cause whatsoever, and shall indemnify same from any costs, expenses or judgements (including attorney's fees) paid or incurred on that behalf.

The Contractor shall dispose of asbestos-containing materials in a landfill which is licensed to accept asbestos waste. Each landfill shall indemnify, defend and hold harmless Owner against

all liabilities arising as a result of the landfill becoming subject to removal or remedial actions under the Comprehensive Environmental Response, Compensation and Liability Act of 1980, as amended, 42 USC § 9600 et seq., or comparable state law.

Asbestos Abatement Contractor is experienced in performing the asbestos abatement work associated with project. At the request of Owner, the Contractor shall provide documentation of relevant experience and references.

Asbestos Abatement Contractor shall demonstrate that they have sufficient personnel resources to successfully complete the work under this project. Asbestos Abatement Contractor and Contractor shall use only qualified subcontractors and that all subcontractors will be under bidder's control at all times in regards to quantity and quality of employees, methods and materials and that the Asbestos Abatement Contractor and Contractor shall retain responsibility for all work of subcontractors within the limits required by law.

Submittals Prior to Start of Work

Proof of Notification in the form of copies of documents submitted to:

1. California Division of Occupational Safety and Health (Asbestos Notification)
2. California Division of Occupational Safety and Health (Lead Notification)
3. EPA, Region IX, NESHAP (if required)
4. San Joaquin Valley Air Pollution Control District (Central Region Office)

Asbestos Contractor Information Detail Section 02 82 14

1. Emergency Information (On Contractor Letterhead)
2. Authorized Project Personnel Section 02 82 14
3. Medical Testing Certification Section 02 82 14
4. Respirator Fit Test Certification Section 02 82 14
5. Certificate of Worker's Acknowledgment Section 02 82 14
6. Asbestos Waste Disposal Site Section 02 82 14

Contractor shall provide all required completed Standard Forms in submittal binders and equivalent to number of required submittals as required by primary design professional.

Provide Project Schedule for all abatement related work as required in Project General Conditions. Schedule shall indicate Set-up, Abatement, and Clearance Phases).

List of all abatement personnel, including full name, date of birth, and SSN assigned to this project.

1. "Competent Person" as required by 8 CCR 1529

- a. Asbestos-Specific Training
- b. Experience
- c. Medical Testing
- d. Respirator Fit-Testing
- e. AHERA accreditation
- f. Employee Release Form

For each employee who will work or enter any "Regulated Area":

- 1. Asbestos-Specific Training
- 2. Experience
- 3. Medical Testing
- 4. Respirator Fit-Testing
- 5. AHERA accreditation
- 6. Employee Release Form

Emergency Information (on Asbestos Abatement Contractor Letterhead)

Name, location and EPA designation of Waste Disposal Site

Name, address and EPA registration of Hazardous Waste Hauler

Subcontractor(s) License(s) if required

MSDS sheets for any materials which require them.

Description or drawings of:

- 1. Abatement area
- 2. Negative Air system, including number, placement of units and location of exhaust ports to outside the work area
- 3. Decontamination area
- 4. Waste pass-out area
- 5. Emergency Exit(s)
- 6. Location of dumpsters or containers

Manufacturers' Data or Technical Data Sheets, including any required testing for:

- 1. Respirators
- 2. Negative Air System Components

3. HEPA Vacuums
4. Waste Water Filtration System
5. Compressed Air System (if applicable)
6. Encapsulant(s)
7. Refinish materials (if applicable)

Submittals - Products

1. Contractor shall provide required submittals in electronic format.
2. Required submittals: Contractor shall provide a complete list of all products proposed for use on the project in the form of a project submittal. Prepare a complete list indicating each product listed. Include the manufacturer's name and proprietary product names for each item listed. Include product data sheets on each product.
3. Form: Prepare the product listing schedule with information on each item tabulated under the following column headings:
 - a. Related Specification Section number.
 - b. Generic name used in Contract Documents.
 - c. Proprietary name, model number and similar designations.
 - d. Manufacturer's name and address.
 - e. Suppliers name and address.
 - f. Installer's name and address.
 - g. Projected delivery date, or time span of delivery period.

Negative Exposure Assessment/Exposure Assessment

1. Asbestos Abatement Contractor shall submit a copy of any proposed "Negative Exposure Assessment" or "Exposure Assessment" for consideration by Owner's Asbestos Representative in the selection of the appropriate respiratory protection as required by 8 CCR 1529. Failure to submit data, or incomplete data shall mandate use of level of respiratory protection as required by applicable regulations, until such time as appropriate data is generated and approved by the APM.

Submittals During Project

Daily Entry/Exit Log

Abatement Contractor Daily Logs

Analytical results of air samples taken to comply with 8 CCR 1529. Provide within 48 hours of shift during which samples were collected.

Notification of any changes in personnel, resources or schedule.

Notification of any injury or accident to employees or others when due work in progress.

Hazardous Waste Manifests

Submittals At Conclusion of Project

Copies of remaining entry/exit logs

Notes or logs kept by job foreman/supervisor

Hazardous Waste Manifests

1.07 ASBESTOS ABATEMENT - CONTRACTOR PERSONNEL

General

Asbestos Abatement Contractor's employees assigned to this project shall be adequately trained and experienced to perform the work in a manner commensurate with all applicable codes, these specifications, and good standards of industry practice.

The Contractor and the Asbestos Abatement Contractor shall be responsible to Owner for the acts and omissions of Asbestos Abatement Contractor's employees, subcontractors and their agents and employees and other persons performing any of the work under the supervision or direction of the Asbestos Abatement Contractor.

Asbestos Abatement Contractor shall at all times enforce strict discipline and good order among its employees and shall not employ on the work any unfit person or anyone not skilled in the task assigned.

Asbestos Abatement Contractor shall employ a competent superintendent who oversees all work in conjunction with this project. The superintendent shall represent Asbestos Abatement Contractor and all communications given to the superintendent shall be considered binding as if given to the Asbestos Abatement Contractor. Superintendent shall be present at all scheduled job progress meetings, or unscheduled meetings when reasonable notice is given.

Training

Asbestos Abatement Contractor shall ensure that all of its employees who will contact or disturb asbestos-containing or asbestos contaminated materials for abatement and auxiliary purposes, and all supervisory personnel who may be involved in planning, execution or inspection of abatement projects have the required training and appropriate certification. Training shall comply with EPA (TSCA) and 8 CCR 1529 OSHA requirements. Training shall be by a State of California approved training provider.

Training shall provide, at a minimum, information on the following topics:

1. The health hazards of asbestos including the nature of various asbestos related diseases, routes of exposure, known dose-response relationships, the synergistic relationship between asbestos exposure and cigarette smoking, latency periods for disease and health basis for standards.

2. The physical characteristics of asbestos including fiber size, aerodynamic properties, physical appearance, and uses.
3. Employee personal protective equipment including the types and characteristics of respirator classes, limitations of respirators, proper selection, inspection, donning, use, maintenance and storage of respirators, field testing the face-piece-to-face seal (positive and negative pressure fitting tests), qualitative and quantitative fit testing procedures, variations between laboratory and field fit factors, factors that affect respirator fit (e.g. facial hair), selection and use of disposable clothing, use and handling of launderable clothing, non-skid shoes, gloves, eye protection and hardhats.
4. Medical monitoring requirements for workers including required and recommended tests, reasons for medical monitoring and employee access to records.
5. Air monitoring procedures and requirements for workers including description of equipment and procedures, reasons for monitoring, types of samples and current standards with recommended changes.
6. Work practices for asbestos abatement including purpose, proper construction and maintenance of air-tight plastic barriers, job set-up of airlocks, worker decontamination systems and waste transfer airlocks, posting of warning signs, engineering controls, electrical and ventilation system lockout, proper working techniques, waste clean-up and storage and disposal procedures.
7. Personal hygiene including entry and exit procedures for the work area, use of showers, and prohibition of eating, drinking, smoking and chewing in the work area.
8. Special safety hazards that may be encountered including electrical hazards, air contaminants, encapsulants, materials from Owner operation, fire and explosion hazards, scaffold and ladder hazards, slippery surfaces, confined spaces, heat stress and noise. Contractor shall take all steps necessary to protect employees from potential hazards.
9. Supervisory personnel shall, in addition, receive training in contract specifications, liability insurance and bonding, legal considerations related to abatement, establishing respiratory protection medical surveillance programs, EPA, OSHA and State record keeping requirements, and specific instructions pertaining to the performance of this project.
10. All other required training topics and material.
11. Required asbestos training must be current (within the last twelve months) for the duration of the project. Any employee whose training expires shall not work on the jobsite until such time as a current certificate is provided.

Medical Monitoring

Medical Monitoring must be provided in accordance with Title 8 CCR 1529, including mandatory appendices.

Asbestos Abatement Contractor shall document that all abatement workers have successfully passed medical examinations as required by OSHA regulations.

1.08 TEMPORARY FACILITIES AND CONTROLS - ASBESTOS ABATEMENT

Temporary Facilities

Contractor to provide a temporary office for use by its personnel. Contractor shall be responsible for connection of electricity, plumbing, or telephone service it requires.

Provide "lockable" containers at the site for the storage of tools and materials used in asbestos abatement. Contractor shall be responsible for security of container and any equipment maintained on project site.

Contractor will provide portable restroom facilities for use by its workers and site personnel at the project location. Contractor shall maintain facilities in clean condition.

Water for Construction

The Asbestos Abatement Contractor may utilize water available on the subject property as long as it is from a source legally belonging to or accessible to the Owner. If water is not available at the site, or water needs go beyond what is available at the subject property, Contractor shall supply water from outside source and shall include cost for water, including delivery and storage in their bid for the work.

Electricity

Asbestos Abatement Contractor shall provide portable electrical generator as required for all aspects of the work to operate power tools and equipment necessary or required to complete the work under the Agreement if needs exceed electrical power available at the site. Contractor shall include cost to provide temporary electrical power in their bid for the work if power is not available at site, or portions of the site, or is inadequate based on project needs.

All circuits within containment areas shall be locked out to prevent possible electrical shock during wet operations. Electrical power sources shall be located outside of work areas.

Handling Material

The Asbestos Abatement Contractor shall properly care for and protect materials and equipment at the site. Placement of building materials and equipment at the site shall be subject to the approval of Owner.

The Asbestos Abatement Contractor shall keep the work area clean to the satisfaction of the Owner and its Representative, and prevent disturbance or debris from the work at all times and prevent release of asbestos from the work area adjacent to areas or portions of the building or building exterior.

Upon completion of the work per work area and at completion of all work, leave grounds in a neat and clean condition and asbestos free.

Cleaning

The Asbestos Abatement Contractor shall keep the work areas clean to the satisfaction of the Owner, and shall prevent disturbance of occupants in adjacent rooms, and shall remove accumulated debris from the work at all times and prevent release of asbestos from the work area into adjacent areas or portions of the building or building exterior.

Upon completion of the work area per day and at completion of all work, leave grounds in a neat and clean condition.

Hoist and Temporary Elevators (Where Applicable)

The Asbestos Abatement Contractor shall install and operate hoist and elevators as required for proper execution of the work and obtain permits, in compliance with all Applicable Laws.

Barricades and Walkways

Maintain at all times adequate barricades or enclosed walkways to satisfaction of the Owner, to protect the workmen, and the public from injury and prevent access to the work areas to the satisfaction of Owner.

Advertisement Signs

Advertisement signs may not be displayed on the property unless approved by the Owner.

Inspection and Testing

Inspection Agency: An independent testing laboratory selected by Owner shall perform any specified testing and laboratory analysis.

Payment of Testing: Testing laboratory charges for work performed by Owner's Asbestos Representative will be paid by Owner, except as otherwise identified in this specification, and shall not be included as part of the contract.

Payment of Re-Testing: Should the results of the laboratory test indicate that the material or workmanship fails to comply with requirements of the specifications, the work shall be redone at the Asbestos Abatement Contractor's expense until it does satisfy the requirements. The final results shall be verified as acceptable by laboratory tests which shall be paid by the Asbestos Abatement Contractor, at his expense.

Employee Conduct

The Asbestos Abatement Contractor shall be responsible for ensuring that its employees comply with all Applicable Laws and perform work in a safe manner. Any employees entering the work area under the influence of alcohol or drugs shall be immediately removed by the Asbestos Abatement Contractor from the job site. In the event there is any question whether said employee is under the influence of alcohol or drugs, the Asbestos Abatement Contractor

shall temporarily remove said employee from the job site until the question is resolved by the Asbestos Abatement Contractor and Owner.

PART 2 PRODUCTS

2.01 PRODUCT OPTIONS AND SUBSTITUTIONS - ASBESTOS ABATEMENT

General

The Contract is based on the materials, equipment and methods described in the Contract Documents.

Deliver all materials in the original packages, containers, or bundles bearing the name of the manufacturer and brand name.

Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or contamination. Replacement materials shall be stored outside of the work area until abatement is completed.

Damaged, deteriorating or previously used materials shall not be used and shall be removed from the work-site and disposed of properly.

Unavailability of Materials

Verify prior to bidding that all specified items will be available in time for installation during orderly and timely progress of the work.

In the event that specified items will not be so available, Contractor may submit, in writing, substitute materials of equal quality for approval by Owner's Asbestos Representative. Substitute materials are not to be considered equal until approved in writing by Owner's Asbestos Representative.

Costs of delays because of non-availability of specified items, when such delays could have been avoided by the Asbestos Abatement Contractor, will be back-charged as necessary and shall not be borne by Owner.

Owner's Asbestos Representative for Asbestos Related Work:

Owner's Asbestos Representative will respond in writing to the Asbestos Abatement Contractor within seven (7) calendar days of receipt of the completed product list schedule. No response within this time period constitutes no objection to listed manufacturers or products, but does not constitute a waiver of the requirement that products comply with Contract Documents. Owner's Asbestos Representative will include a list of unacceptable product selections, containing a brief explanation for this action.

Quality Assurance

Compatibility of Options: When the Asbestos Abatement Contractor is given the option of selecting between two or more products for use on the project, the product selected shall be

compatible with products previously selected, even if previously selected products were also options.

Product, Deliver, Storage, and Handling

Deliver, store and handle products in accordance with the manufacturer's recommendations, using means and methods that will prevent damage, deterioration and loss, including theft.

Schedule delivery to minimize long-term storage at the site and overcrowding of construction spaces.

Coordinate delivery with installation time to ensure minimum holding time for items that are flammable, hazardous, easily damaged, or sensitive to deterioration, theft and other losses.

Deliver products to the site in the manufacturer's original sealed container or other packaging system, complete with labels and instructions for handling, storing, unpacking, protection and installing.

Inspect products upon delivery to ensure compliance with the Contract Documents, and to ensure that products are undamaged and properly protected.

Store products at the site in a manner that will facilitate inspection and measurement of quantity or counting of units.

Store heavy materials away from the project structure in a manner that will not endanger the supporting construction.

Store products subject to damage by the elements above ground, under cover in a weathertight enclosure, with ventilation adequate to prevent condensation.

Maintain temperature and humidity within range required by manufacturer's instructions.

2.02 PRODUCT SELECTION

Standard Products: Where available, provide standard products of types that have been used successfully in similar situations on other projects.

Product Selection Procedures: Product selection is governed by the Contract Documents and governing regulations, not by previous project experience. Procedures governing product selection include the following:

Non-Proprietary Specifications: When the Specifications list products or manufacturers that are available and may be incorporated in the Work, but do not restrict the Asbestos Abatement Contractor to use of these products only, the Asbestos Abatement Contractor may propose any available product that complies with Contract requirements. Comply with Contract Document provisions governing "substitutions" to obtain approval for the use of an unnamed product.

Descriptive specification Requirements: Where Specifications describe a product or assembly, listing exact characteristics required, with or without use of a brand or trade name, provide a product or assembly that provides the characteristics and otherwise complies with Contract requirements.

Performance Specification Requirements: Where Specifications require compliance with performance requirements, provide products that comply with these requirements, and are recommended by the manufacturer for the application indicated. General overall Performance of a product is implied where the product is specified for a specific application.

Manufacturer's recommendations may be contained in published product literature, or by the manufacturer's certification of performance.

Compliance with Standards, Codes, and Regulations: Where the Specifications only require compliance with an imposed code, standard or regulation, select a product that complies with the standards, codes or regulations specified.

Allowances: Refer to individual Specification Sections and "Allowance" provisions in Division-1 for allowances that control product selections, and for procedures required for processing such selections.

Materials

Material Safety Data Sheet (MSDS) will be submitted for each product or material to be used in conjunction with the work.

Wetting Agent: The wetting agent shall be BWE 5000 manufactured by Better Working Environments, Inc. of San Diego, CA, or approved equivalent.

Surfactant: (wetting agent shall be a 50/50 mixture of polyoxethylene ether and polyoxethylene ester, or equivalent, mixed in a proportion of 1 fluid ounce to .5 gallons of water or as specified by manufacturer.

1. Reference Materials: Aqua-Gro or equal.
2. As an alternate to these surfactants, specialized removal materials may also be used:

Reference Materials: BWE500 (Better Working Environments, Las Vegas, Nevada) or EPA-55 (American Coatings Corporation, Niles IL).

Encapsulant(s): Encapsulant used to reseal surfaces from which asbestos has been removed and to "lock-down" all remaining microscopic asbestos-containing particulate. Material shall be compatible with intended use, operating characteristics and environmental condition.

1. Encapsulants should not be solvent-based or utilize a vehicle consisting of hydrocarbons.
2. Reference Materials: Foster's 22-P or Cable Coat 2-B (American Coatings Corporation, Niles, IL) or BWE 3000 (Better Working Environments, Las Vegas, Nevada) or equivalent.
3. Encapsulants shall be of the bridging or penetrating variety.
4. Factory mutual approval for Class A construction

5. Underwriter Laboratory approval for Class A
6. Flame Spread Class A - 0 to 2
7. Encapsulating Material: Encapsulation material shall provide penetrating or bridging characteristics adequate to protect against fiber release and shall have been tested by methods compatible with those used by Battelle Laboratories Protocol.
 - a. Foster's as manufactured by H.B. Fuller Co. of Houston, Penetrating Encapsulant: No. 207 Special Sealer No. 33775-2-7A, Makus-Cinnatus Inc.; or approved equal.
 - b. Bridging Encapsulant: Pentagon Plastics Inc., or approved equal.
 - c. Fibercote manufactured by Northwest Coating, Inc., Edmonds, WA, or approved equal.

Sealants: Select from the following or their equivalent if approved for use on the project. All materials should be field tested and used according to the manufacturers' specifications.

No. 207 Special Sealer No. 33775-27A as manufactured by Makus-Cinnatus, Inc., distributed by Northwest Coatings, Inc., P.O. Box 635, Edmonds, WA 98020, Telephone (206) 778-5644. (Application rate as recommended by manufacturer, or approved equal.)

"Asbestos 2000," Arpin Products, Inc., P.O. Box 262, Oak Hurst, NJ 07755, Telephone (202) 531-0674. (Application rate as recommended by manufacturer, or approved equal.)

"Wedbestos Sealer," Webco Products, Stinnes Western Chemical, 3270 East Washington Blvd., Los Angeles, CA 90023, Telephone (213) 269-0191. (Application rate as recommended by manufacturer, or approved equal.)

"Dust-Set," Mateson Chemical Corp., 1025 E. Montgomery Ave., Philadelphia, PA 19125, Telephone (215) 423-3200. (Application rate as recommended by manufacturer, or approved equal.)

"Fibersele," penetrating sealant manufactured by Northwest Coatings, Inc., Edmonds, WA 98020, Telephone (206) 778-5644. (Application rate as recommended by manufacturer, or approved equal.)

Tape or Spray Adhesive: Tape or Spray Adhesive shall be capable of sealing joints of adjacent plastic sheets and for attachment of plastic sheet to finished or unfinished surfaces of dissimilar materials and of adhering under dry and wet conditions, including use of amended water.

Plastic Sheet: All plastic sheeting must be minimum six mil. and fire retardant and shall be polyethylene material sized in lengths and widths to minimize the frequency of joints. All critical barriers shall consist of min. six (6) mil. polyethylene film.

Lumber/Wood: All wood used in the construction of the enclosure/decontamination system must be a treated fire retardant type.

Plastic Bags: Plastic bags shall be a minimum six mil. clear polyethylene printed with warning labels per OSHA and EPA regulations.

Glove Bags: Glove bags shall be a minimum of six mil. PVC and specially designed for removal of asbestos-bearing insulation.

All unused products shall remain the property of the Asbestos Abatement Contractor and shall be removed from the project site before completion of the project.

Execution

Installation of Products

1. Comply with manufacturer's instructions and recommendations for installation of products in the applications indicated. Anchor each product securely in place, accurately located, and aligned with other work.
2. Clean exposed surfaces and protect as necessary to ensure freedom from damage and deterioration at time of Substantial Completion

2.03 WORK AREA CLEARANCE - ASBESTOS ABATEMENT (DEMOLITION)

General Related Documents

Project construction drawings and general provisions of Contract, including General and Supplementary Conditions and other Specification Sections, apply to work of this section.

Visual Inspections: Required as a prerequisite of individual containment areas. Requires "Certificate of Visual Inspection" to be signed by representative of Asbestos Abatement Contractor and Owner's Asbestos Consultant.

Final Air Clearances: Project requires performance of Final Air Clearances for each containment area where disturbance of ACM occurs. Final Air Clearances will comply with AHERA requirements.

Final Air Clearances will be conducted as a condition of successfully meeting project requirements prior to re-occupancy by non-abatement construction personnel and/or students and staff.

Owner's Asbestos Representative and These Specifications

Owner's Asbestos Representative may conduct air monitoring on behalf of Owner at its discretion.

Owner's Asbestos Representative will conduct a final visual inspection within each containment area following completion of abatement operations as a condition of acceptance of work.

Contractor shall not request an extension of the Contract based on delays associated with their failure to determine the scope of work involving abatement operations, additional abatement work, or additional Final Air Clearances necessitated by failure of Contractors to successfully pass the initial Final Air Clearance.

Asbestos Abatement Contractor shall be responsible to pay all costs associated with supplemental clearance rounds including field time, laboratory costs, consulting fees, shipping,

and all associated costs based on failure to comply with specified clearance criteria and EPA clearance requirements.

Building Owner shall be responsible to pay costs associated with the initial Final Air Clearance per containment area. At its discretion, the Owner may hold the Contractor responsible for costs associated with all follow-up air clearances necessitated by Contractor's failure to meet AHERA clearance criteria (per containment) and may deduct costs for each repeat final air clearance from monies owed the contractor under the Agreement.

Testing Costs

Asbestos Abatement Contractor's air sampling operations, including labor, equipment, material, and laboratory analysis shall be paid by the Asbestos Abatement Contractor and shall be included in their bid for the work.

Owner shall pay for all inspections and sampling done at its request unless such costs are otherwise provided for in the contract, including perimeter air sampling and initial (1) final air clearance per containment area.

Contractor shall not request an extension of the Contract based on delays associated with their failure to determine the scope of work involving abatement operations, additional abatement work necessitated by failure of Contractors to successfully pass any Final Visual Inspection and/or any Final Air Clearance.

Release Criteria: Abatement related work is complete if the following conditions are met:

The Owner's Asbestos Representative shall upon notice that specified abatement operations are complete (per containment area) conduct an on-site visual inspection to ensure that the abatement work has been completed in accordance with these specifications.

The Asbestos Abatement Work Area is considered to have met clearance criteria and to be safe to occupy when airborne asbestos structure concentrations have been determined to be below applicable regulatory airborne levels as herein defined per the AHERA regulation (40 CFR Part 763 subpart E) within each Work Area.

Upon satisfactorily passing the visual inspection and final air clearance and acceptance of work by Owner, Contractor proceed with reconstruction work on a building by building basis.

If the visual inspection and/or final air clearance does not successfully pass as determined by the Owner's Representative, the Contractor shall conduct additional abatement, decontamination, and/or cleaning to satisfaction of Owner's Representative. Upon completion of additional work, visual inspection and final air clearance shall be repeated until Owner and its Representative are satisfied that work has been completed satisfactorily and completely. Contractor shall be responsible for all costs associated with additional visual clearance related events based on failure to successfully meet visual inspection and final air clearance criteria for containments and may deduct cost of additional air clearances from monies owed the Contractor under the Agreement.

PART 3 EXECUTION

3.01 ASBESTOS ABATEMENT: GENERAL**General**

Asbestos Abatement Contractor shall supply all labor, materials, equipment, insurance and disposal to remove identified ACBM's as well as assumed and presumed (PACM) ACMs', and ACCM's indicated in this Specification and as listed in the previous asbestos survey report for the specified school site. Contractor shall refer to project construction drawings, previous asbestos survey, specification sections and all design documents to determine work that may involve disturbance of asbestos-containing materials.

Asbestos Abatement Contractor shall be Certified for Asbestos Work by the California State Contractor's Licensing Board.

Each employee of Asbestos Abatement Contractor assigned to this work shall be trained in accordance with the requirements of the EPA (TSCA) and Title 8 CCR 1529 and shall be a State of California Certified Asbestos Supervisor or Worker. At least one employee on each shift shall have successfully completed current refresher training meeting the requirements for "Competent Person" (Title 8 CCR 1529).

All work shall be done in accordance with applicable regulations, including, but not limited to: 29 CFR 1926.1101(Federal OSHA), Title 8 CCR 1529 (Cal-OSHA), 40 CFR Part 61 (NESHAPS), including mandatory and non-mandatory appendices as applicable.

Asbestos Abatement Contractor shall make all necessary notifications according to the form, content and schedule required by applicable laws and regulations.

General Parameters

Asbestos Abatement Contractor shall remove all asbestos-containing material as required to complete scope of work, and authorized change orders based on review of all project design documents.

Asbestos Abatement Contractor shall review all project construction drawings , previous asbestos survey report, and specifications regarding scope of work to determine locations where ACBM's are present which are to be removed in order to complete the scope of demolition or renovation as determined by the Owner. Contractor shall not request or be awarded additional compensation for work due to their failure to adequately determine the scope of abatement work based upon review of all pertinent design documents and field verification of existing condition effecting completion of the work.

Asbestos Abatement Contractor shall protect employees of Owner, and others from inhaling asbestos fibers in excess of Cal/OSHA regulations. Asbestos Abatement Contractor shall take measures to maintain airborne levels below required levels in accordance with Cal/OSHA requirementsas and these specifications. Airborne levels may be verified by perimeter air sampling operations conducted by Owner's Asbestos Representative.

Asbestos Abatement Contractor shall, during the abatement of ACM, prevent asbestos fiber contamination of any area outside any regulated area as herein defined. Asbestos Abatement Contractor shall erect and maintain negative pressure enclosure(s), and critical barriers to preclude migration of airborne fibers outside the containment area. Compliance with this

requirement shall be verified by perimeter air monitoring , visual determination, and recording manometer.

Asbestos Abatement Contractor shall, during work, limit entry into the work area only to authorized employees and visitors wearing appropriate respiratory protection. Employees may be required to obtain and display a temporary identification badge authorizing entry into the facility. Authorized employees and visitors shall include:

1. Asbestos Abatement Contractor's employees listed in job submittals
2. Asbestos Abatement Contractor's authorized supervisory personnel
3. Owner's Asbestos Representatives
4. Employees of agencies having jurisdiction over the work
5. Authorized employees of Owner

Asbestos Abatement Contractor shall ensure and document that all asbestos-containing waste has been disposed of in accordance with applicable federal, state and local laws.

Asbestos Abatement Contractor shall document that all activities are/were in accord with the Project Specifications, the Project Contract Documents and all applicable laws and regulations governing abatement of ACCM/ACBM's.

In addition to special precautions required during asbestos abatement, Asbestos Abatement Contractor shall provide a safe working environment and personal protective devices for Asbestos Abatement Contractor's employees and any authorized visitors.

Asbestos Abatement Contractor shall pursue work with all due diligence.

Asbestos Abatement Contractor shall not cease working on this project except at times specified in the project calendar or without prior notification and approval of Owner and its Representative.

Asbestos Abatement Contractor shall not change or substitute the Asbestos Abatement Contractor Supervisor (Project Foreman) without prior notification and approval of Owner's Asbestos Representative.

Extra Work

The Asbestos Abatement Contractor warrants that he/she has become fully familiar with the work including but not limited to the quantities, locations, and types of asbestos containing materials to be abated.

"Extra Work" may only be authorized by Owner, in writing. Any additional work performed which Owner has not approved in writing shall not be the responsibility of the Owner and the Contractor shall not request compensation.

Owner's Asbestos Representative shall approve in writing all additional, unforeseen abatement work necessitating a change in contract price. Costs for such work shall be agreed upon by

Contractor and Owner prior to initiating work effecting such materials. Negotiated costs shall be all inclusive and shall reflect all costs including labor, materials, insurance, disposal, overhead and profit, etc. and shall be in accordance with project provisions for "change orders".

Stop Work Orders

Owner or its Representative may issue a STOP WORK order and suspend work in whole or in part, when in the opinion of Owner, the suspension is necessary or in its best interest.

Owner's Asbestos Representative may issue a STOP WORK order whenever the Asbestos Abatement Contractor's work or protective measures are not in accordance with the Specifications or applicable rules and regulations.

Any breach in isolation between the regulated area and adjacent areas shall be sufficient reason to issue a STOP WORK order.

Air sampling inside the work area which results in fiber counts in excess of 0.1 f/cc or 1% of the rated protection limit of other respiratory protection in use at the time of sampling shall be sufficient reason to issue a STOP WORK order.

Excess ACM debris, visible emissions, or insufficient wetting of ACM may result in a STOP WORK order.

Complaints from building occupants located in adjacent areas may result in a temporary STOP WORK order. If such complaints are not the result of Asbestos Abatement Contractor's failure to observe or comply with the Specifications or regulations, time lost on the project shall be added to project time period.

Visible debris outside the work area shall be sufficient reason to issue a STOP WORK order.

Upon issuance of a STOP WORK order, abatement work shall not resume until current respiratory protection, and methods and procedures utilized by the Asbestos Abatement Contractor have been evaluated and necessary steps taken to reduce airborne levels below stipulated levels to satisfaction of Owner's Asbestos Representative.

3.02 SITE PREPARATION - ASBESTOS ABATEMENT

General

The "Work Area", including regulated areas, equipment staging areas, and other areas set aside for the use of the Asbestos Abatement Contractor, are at all times during this project the responsibility of the Asbestos Abatement Contractor. Contractor shall maintain areas in clean condition to the satisfaction of Owner's Asbestos Representative.

Asbestos Abatement Contractor has the right and obligation to control access to restricted work areas. Employees of Owner may be required to access certain areas during the project for the purposes of servicing or maintaining equipment and for emergencies. Contractor shall provide reasonable access to such personnel and shall maintain two (2) clean and properly functioning PAPR respirators and protective coveralls at the jobsite for use by such persons.

Signs and Barriers

Perimeter barriers shall be installed around each work area and other areas used by Asbestos Abatement Contractor for storage, disposal or equipment.

At each access to the regulated area, the Asbestos Abatement Contractor shall install warning signs meeting the requirements of Title 8 CCR 1529 and 40 CFR 763, subpart E.

Security

Asbestos Abatement Contractor shall be responsible for security of Asbestos Abatement Contractor's work area, material, equipment and supplies.

Unless otherwise agreed to in writing, Owner accepts no responsibility for loss of Asbestos Abatement Contractor's equipment or materials maintained at the project site.

Asbestos Abatement Contractor shall notify local fire department of the asbestos abatement project and effective dates.

3.03 WORK AREA PREPARATION - ASBESTOS ABATEMENT

General

Asbestos Abatement Contractor shall post caution signs meeting the specifications of Title 8 CCR 1529 at any location and approaches to a location where airborne concentrations of asbestos may exceed the "Permissible Exposure Limit".

Asbestos Abatement Contractor shall determine whether building electrical power or temporary power supply is necessary. All circuits feeding the work area shall be locked out and tagged. Electrical power shall be brought into the work area from circuits and sources outside the containment area. Electrical power beyond that readily at the site will be provided by the Asbestos Abatement Contractor at no additional cost to Owner, including cost of providing temporary electrical power.

Emergency Exits

Emergency exits shall be established and clearly marked with emergency exit signs complying with applicable fire codes, approved by Owner and clearly marked with duct tape arrows, properly lighted, or other effective designations to permit easy location from anywhere within the work area.

Emergency exits shall be secured to prevent access from uncontaminated areas and still permit emergency exiting.

Emergency exits shall be properly sealed with polyethylene sheeting which can be cut to permit egress if needed.

Decontamination Area

General Requirements

1. Worker decontamination enclosure systems shall be provided at all locations where workers will enter or exit the work area.
2. The worker decontamination enclosure system shall consist of at least a clean room, shower room and an equipment room, each separated from the other and from the work area by airlocks and must substantially conform to the requirements of Title 8 CCR 1529.
3. Plans for construction, including materials and layout, shall be submitted to Owner's Asbestos Representative as part of the submittal package. Worker decontamination enclosure systems constructed at the work-site shall utilize six (6) mil. polyethylene sheeting on sides or other acceptable materials for privacy, whenever visible outside of containment area. For commercial units, Asbestos Abatement Contractor shall submit manufacturer's data sheet.
4. Entry to and exit from all airlocks and decontamination enclosure system chambers shall be through curtained doorways consisting of two sheets of overlapping polyethylene sheeting. Doorway designs with equivalent protection and acceptable to Owner's Asbestos Representative may be utilized.
5. Access between any two rooms in the decontamination enclosure system shall be through an airlock with at least 1 foot separating each curtained doorway. Pathways into (from clean to contaminated) and out from (contaminated to clean) the work area shall be clearly designated.
6. The equipment room shall be used for storage of equipment and tools at the end of a shift after they have been decontaminated using a HEPA filtered vacuum and/or wet cleaning techniques as appropriate.

Decontamination Area – Construction

1. Construction, whether job-built or commercial, shall be of sturdy materials capable of withstanding the flow of person, equipment and material.
2. In areas where no other security against entry can be provided, the outside door to the clean-room must be provided with a lock or other security device. Asbestos Abatement Contractor shall make provision for access into the work area by authorized representatives and visitors.
3. Clean room shall be sized to adequately accommodate the work crew. If the clean room is not of sufficient size to contain storage lockers or bins for employee's clothing and respiratory equipment, such storage shall be provided in a secure area as close as possible to the entry to the clean room.
4. Shower room shall contain one or more showers as necessary to adequately accommodate all workers.
5. Showers shall be provided with hot and cold running water.

6. Shower water shall be filtered through five (5) micron filter system prior to be disposed of in manner approved by Owner and the local water management authority.
7. Equipment room shall be sized to permit both employee changes and storage of equipment and materials.

3.04 WORKER PROTECTION AND DECONTAMINATION - ASBESTOS ABATEMENT

General

Asbestos Abatement Contractor shall provide for all employees appropriate personal protective gear and other necessary safety equipment.

Personal protective gear and safety equipment shall be inspected before each use.

In addition to requirements of this Section, Asbestos Abatement Contractor may be required to provide additional health and safety protection as required by Owner or its Representative.

Asbestos Worker Training

AHERA Accreditation: All workers are to be accredited as Abatement Workers as required by the AHERA regulation 40 CFR 763 Appendix C to Subpart E, April 30, 1987.

State and Local License: All workers are to be trained, certified and accredited as required by state or local code or regulation.

1. Train, in accordance with Title 8 CCR 1529 all workers in the dangers inherent in handling asbestos and breathing asbestos dust and in proper work procedures and personal and area protective measures. Include but do not limit the topics covered in the course to the following:
2. Methods or recognizing asbestos
3. Health effects associated with asbestos
4. Relationship between smoking and asbestos in producing lung cancer
5. Nature of operations that could result in exposure to asbestos

Importance of and instruction in the use of necessary protective controls, practices and procedures to minimize exposure including:

1. Engineering Controls
2. Work Practices
3. Respirators
4. Housekeeping procedures

5. Hygiene facilities
6. Protective clothing
7. Decontamination procedures
8. Emergency procedures
9. Waste disposal procedures
10. Purpose, proper use, fitting, instructions and limitations of respirators as required by 29 CFR 1910.134.
11. Appropriate work practices for the work
12. Requirements of medical surveillance program
13. Review of Title 8, CCR 1529 & 29 CFR 1926.1101
14. Pressure Differential Systems
15. Work practices including hands on or on-the-job training
16. Personal Decontamination procedures
17. Air monitoring, personal and area

Medical Examinations

Provide medical examinations for all asbestos abatement workers who may encounter an airborne fiber level of 0.1 f/cc or greater for an eight (8) hour Time Weighted Average. In the absence of specific airborne fiber data provide medical examinations for all workers who will enter the Work Area for any reason. Examination shall as a minimum meet OSHA requirements as set forth in Title 8 CCR 1529.

Respiratory Protection

General

1. Respiratory Protection Program: Comply with ANSI Z88.2 - 1980 "Practices for Respiratory Protection" and OSHA 29 CFR 1910.134 and 1926.103.
2. Require that respiratory protection be used at all times that there is any possibility of disturbance of ACBM's whether intentional or accidental.
3. Require that a respirator be worn by anyone in a Regulated Area at all times, regardless of activity, during a period that starts with any operation which could cause airborne fibers until the area has been cleared for re-occupancy in accordance with enclosed Sub-Section 1.11.

4. Regardless of Airborne Fiber Levels: Require that the minimum level of respiratory protection used for work involving friable materials be a half-face respirator with high efficiency particulate air filters (HEPA).
5. The Contractor shall upgrade the type of respiratory protection required based on OSHA requirements and initial and on-going personal air monitoring.

Fit Testing

1. Initial Fitting: Provide initial fitting of respiratory protection during a respiratory protection course of training set up and administered by a Certified Competent Person. Fit types of respirator to be actually worn by each individual. Allow an individual to use only those respirators for which training and fit testing has been provided.
2. On a monthly basis, check the fit of each worker's respirator by having irritant smoke blown onto the respirator from a smoke tube.
3. Upon Each Wearing: Require that each time an air-purifying respirator is put on it be "fit checked" with a positive and negative pressure fit test in accordance with the manufacturer's instructions or ANSI Z88.2 (1980) and 8 CCR 1529.

Type of Respiratory Protection Required

1. Provide Respiratory Protection as indicated in paragraph below. Where paragraph below does not apply, determine the proper level of protection by dividing the expected or actual airborne fiber count in the Work Area by the "protection factors" given below.
2. The level of respiratory protection which supplies an airborne fiber level inside the respirator, at the breathing zone of the wearer, at or below the permissible exposure limit (PEL) is the minimum level of protection allowed.

Permissible Exposure Limit (PEL)

8-Hour Time Weighted Average (TWA) and Ceiling Concentration of asbestos fibers to which any worker may be exposed shall not exceed the following:

1. Fibers: For purpose of this section, fibers are defined as all fibers regardless of composition as counted in the OSHA Reference Method (ORM), or NIOSH 7400 procedure.
2. 8-Hour Time Weighted Average (TWA) - ≤ 0.1 fibers/cubic centimeter.
3. Excursion Monitoring: 30 minute PEL: < 1.0 fibers/cubic centimeter.

Respiratory Protection Factor

Respirator Type

Protection Factor

Air Purifying:

10

Negative pressure respirator
High efficiency filter
Half face piece

Air Purifying: 50

Negative pressure respirator
High efficiency filter
Full face piece

Powered Air Purifying (PAPR): 50

Positive pressure respirator
High efficiency filter
Half or Full face piece

Type C supplied air: 1000

Positive pressure respirator
Pressure demand or other
pressure positive mode
Half face piece

Type C supplied air: 2000

Positive pressure respirator
Pressure demand or other
positive pressure mode
Full face piece

Type C supplied air: 10,000

Positive pressure respirator
Pressure demand or other
positive pressure mode
Full face piece equipped with an
auxiliary positive pressure
Self-contained breathing apparatus (SCBA)

Self-contained breathing apparatus (SCBA): 10,000

Positive Pressure demand or other positive pressure mode
Full face piece

Asbestos Abatement Contractor shall provide respiratory protection for all employees who enter the regulated area anytime that one can reasonably expect that ACM will be disturbed or that anticipated airborne levels may exceed "0.01 f/cc".

Level of Protection

1. Respiratory protection shall be provided per 8 CCR 1529 requirements. The minimum protection required at any time within the regulated area for abatement of friable materials, regardless of fiber level, shall be 1/2-face, negative pressure, (P-100-HEPA filtered respirators operated in positive pressure mode.

2. Type "C" air supplied respirators in positive pressure demand mode with full-face pieces and HEPA filtered disconnect protection are recommended by the U.S.EPA for all full shift abatement work until the successful completion of final clearance monitoring. The Contractor shall be prepared to provide Type "C" respiratory protection in those circumstances required by Cal/OSHA.
3. Compressed air systems, if used, shall be designed to provide air volumes and pressures to accommodate respirator manufacturer's specifications. The compressed air systems shall have a receiver of adequate capacity to allow escape of all respirator wearers from contaminated areas in the event of compressor failure. Compressors must meet applicable Cal/OSHA requirements. Compressors must have an in-line carbon monoxide and periodic inspection of the carbon monoxide monitor must be evidenced. Documentation of adequacy of compressed air system/ respiratory protection system must be retained on site. This documentation will include a list of compatible components with the maximum number and type of respirators that may be used with the system. Periodic testing of compressed air shall insure that systems provide air of sufficient quality (Grade D breathing air as described in Compressed Gas Association Commodity Specification G-7.1).
4. Appropriate minimum respiratory protection utilized by Asbestos Abatement Contractor shall be based upon submission and acceptance of "Negative Exposure Assessment" and/or "Exposure Assessment by Asbestos Abatement Contractor. Failure to provide "NEA" or "EA" will result in mandatory respiratory protection as required by OSHA until such time as "NEA" is established.

Other Personal Protection

1. Full body disposable protective clothing, including head, body, and foot coverings consisting of materials impenetrable by asbestos fibers (Tyvek (R) or equivalent) shall be provided to all workers and authorized visitors in sizes adequate to accommodate movement without tearing.
2. Disposable clothing shall be worn inside the regulated area any time one can reasonably expect that ACM will be disturbed.
3. Rips or tears in disposable clothing shall be repaired immediately as required by Title 8 CCR 1529.
4. New disposable clothing must be used for each entry into the regulated area.
5. Disposable clothing must be removed in the equipment room before each exit from the regulated area.
6. Eye protection meeting the requirements of ANSI Standard Z87.1-1979, safety shoes meeting the requirements of ANSI Standard Z41.1-1967, disposal PVC gloves), as necessary, shall be provided to all workers and authorized visitors.

7. Non-skid footwear shall be provided to all abatement workers. Disposable clothing shall be adequately sealed to the footwear to prevent body contamination.

3.05 ENTRY AND EXIT PROCEDURES – REGULATED AREA

General

1. All workers and authorized personnel shall enter the work area through the worker decontamination enclosure system.
2. All personnel, shall read and be familiar with all posted regulations, personal protection requirements (including workplace entry and exit procedures) and emergency procedures. A sign-off sheet shall be used to acknowledge that these have been reviewed and understood by all personnel prior to entry.
3. All personnel who enter and leave the regulated area must sign the entry/exit log, located outside or in the clean room.

Entry

1. All personnel shall proceed first to the clean room, remove street clothes and appropriately don respiratory protection (as deemed adequate for the job conditions) and launderable and/or disposable coveralls, head covering and foot covering. Hard hats, eye protection and gloves shall also be utilized if required by work conditions. Clean respirator and protective clothing shall be provided and utilized by each person for each separate entry into the work area.
2. Personnel wearing designated personal protective equipment shall proceed from the clean room through the shower room and equipment room to the main work area.

Exit

1. Before leaving the work area all personnel shall remove gross contamination from the outside of respirators and protective clothing by brushing and/or wet wiping procedures. Each person shall clean bottoms of protective footwear in the walk-off pan just prior to entering the equipment room.
2. Personnel shall proceed to equipment room where they remove all protective equipment except respirators. Deposit disposable [and launderable] clothing into appropriately labeled containers for disposal.
3. Reusable, contaminated footwear, hard hats and similar gear shall be stored in the equipment room when not in use in the work area. Upon completion of abatement it shall be decontaminated or disposed of as asbestos contaminated waste.
4. Still wearing respirators, personnel shall proceed to the shower area, clean the outside of the respirators and the exposed face area under running water prior to removal or respirator then shower and shampoo to remove residual asbestos contamination. Various types of respirators will require slight modification of these

procedures. An airline respirator with HEPA filtered may be disconnected in the equipment room and worn in the shower. A powered air-purifying respirator face piece will have to be disconnected from the filter/power pack assembly which is not waterproof, upon entering the shower. A dual cartridge respirator may be worn into the shower. Cartridges must be replaced for each new entry into the work area.

5. After showering and drying off, employees shall proceed to the clean room and don clean disposable clothing if there will be later re-entry into the work area or street clothes.

3.06 HYGIENE

Asbestos Abatement Contractor shall provide sanitary facilities and toilets as close as possible to the entry of the regulated area.

No eating, smoking, chewing or drinking shall be permitted in the regulated or decontamination areas.

3.07 DEBRIS AND DECONTAMINATION - ASBESTOS ABATEMENT

General

Asbestos Abatement Contractor shall remove all visible asbestos-containing debris prior to any work which would disturb the debris or cause it to become airborne.

Debris may be wet wiped or HEPA vacuumed.

Moveable Equipment and Materials

These instructions apply to Owner's Asbestos Representatives equipment and materials.

Moveable equipment and materials upon which there is evidence of asbestos-containing debris shall be cleaned before being moved from the regulated area. Asbestos Abatement Contractor shall be responsible to move all furnishings, equipment, or fixtures as necessary to complete scope of work. Asbestos Abatement Contractor personnel are not to unplug any operating systems or equipment without approval of Owner.

3.08 DISPOSAL - ASBESTOS ABATEMENT

General

This sub-section describes the disposal of Regulated ACM's (RACM), non-friable ACM's, and ACCM's. Disposal includes packaging of asbestos-containing waste materials. Disposal shall be at an approved landfill licensed to accept regulated, asbestos-containing waste. ACCM's may be disposed of as Non-Hazardous in California if confirmed by Point Count as containing "trace" (<1.0%) asbestos content. ACCM not confirmed by Point Count analysis as <1.0% asbestos content shall be disposed of as "ACM" in accordance with local, state and federal regulations.

Asbestos Abatement Contractor shall be responsible for ascertaining current applicable regulations for handling, transportation and disposal in the jurisdiction in which the work takes place.

All disposal shall be in accordance with applicable regulations of the U.S. EPA, U.S. DOT, California DHS and the local AQMD/APCD.

As the work progresses, to prevent exceeding available storage capacity on site, sealed and labeled containers of asbestos-containing waste shall be removed and transported to the prearranged disposal location.

Disposal must occur at an authorized site in accordance with regulatory requirements of NESHAP and applicable State and Local guidelines and regulations, including the California Department of Public Health, Toxic Substances Control Division.

Intact "cementitious" asbestos-containing waste shall be disposed of as non-friable at an EPA licensed landfill in accordance with the landfill requirements.

Non-friable asbestos-containing material shall be disposed at landfill licensed to accept non-friable material. Packaging shall be in accordance with the requirements of the landfill and local solid waste requirements.

Contractor shall utilize and provide a "Hazardous Waste Manifest for each shipment of waste defined by the State of California as Hazardous Waste.

Contractor shall utilize and provide a "Non-Friable Waste Manifest" for each shipment of waste defined by the State of California as Non-Hazardous.

Handling

Materials are to be removed as intact sections or components whenever possible.

All material shall be packed in sealed, impermeable containers.

1. Double 6 mil. polyethylene or plastic bags may ordinarily be used.
2. Large components removed intact may be wrapped in 2 layers of 6 mil. polyethylene sheeting secured with tape for transport to the landfill. All labeling requirements shall be met.
3. Asbestos-containing waste with sharp-edged components (e.g., nails, screws, metal lath, tin sheeting) which may tear or puncture the polyethylene bags and sheeting shall be wrapped in additional layers of 6 ml. polyethylene and/or placed into fiberboard or steel drums for disposal.

Contractor may bulk load asbestos-containing material and presumed asbestos-contaminated building related debris into a 10 mil. polyethylene lined dumpster for transport if acceptable under local, state and federal regulations, and landfill accepting the waste.

All containers shall be properly labeled in accordance with Title 8 CCR 1529.

1. If containers are not pre-stenciled by manufacturer, adhesive labels including all required information are to be attached.
2. Adhesive labels are to be securely attached and placed on the upper portion of the container.
3. Each waste bag shall include generator information as required by federal and state regulations which shall be plainly visible.

Waste Pass-Out

Remove all containerized waste from the work area through waste container pass-out airlock.

1. Pre-clean all bags in the equipment area of the pass-out system.
2. Clean exterior of bag.
3. Pass through airlocks.
4. Place in second bag on the clean side of the waste pass-out system.

Preparation for Transport

Once drums, bags and/or wrapped components have been removed from the work area, they shall be loaded into an enclosed truck or roll-off dumpster for transportation to the landfill.

Dumpsters or trucks shall have doors or tops that can be closed and locked to prevent vandalism or other disturbance of the bagged asbestos debris and wind dispersion of asbestos fibers. During periods in which dumpster doors remain open, Asbestos Abatement Contractor shall maintain one accredited employee at the dumpster continuously while doors are open to prevent unauthorized entry. There will be no exceptions.

The enclosed cargo area of the container shall be free of debris and lined with 6 mil. polyethylene sheeting or spray-on poly material to prevent contamination from leaking or spilled containers. Floor sheeting shall be installed first and extend up the sidewalls. Wall sheeting shall be overlapped and taped into place.

Unbagged material shall not be placed in these containers, nor shall they be used for non-asbestos waste. Bags shall be placed, not thrown, into these containers to avoid splitting.

Personnel loading asbestos containing waste shall be protected by disposable clothing including head, body and foot protection and at a minimum, half-face piece, air-purifying, dual cartridge/respirators equipped with high efficiency filters.

Drums shall be placed on level surfaces in the cargo area and packed tightly together to prevent shifting, tipping. Large structural components shall be secured to prevent shifting and bags placed on top. Do not throw containers into truck cargo area.

Transportation

Regulated ACBM's shall be taken off-site onto a public road only by a registered hazardous waste hauler in a registered hazardous-waste hauling vehicle.

Owner's Asbestos Representative shall be notified at least 24 hours in advance of the time of any pick-up of asbestos waste.

Asbestos-waste in excess of 50 pounds taken onto a public road must be accompanied by a properly completed Hazardous Waste Manifest.

Hazardous Waste Manifest must be signed by an individual designated by Owner.

Documentation

On a weekly or per load basis, submit copies of all manifests and disposal site receipts and weigh tags to Owner for Asbestos Related Work. Manifest number is to be recorded on weight tags. Each load requiring a manifest shall be weighed at the weigh station nearest the project.

1. Receipts are to be returned to "The Generator" within 30 days.

3.09 INSPECTIONS AND TESTING - ASBESTOS ABATEMENT

General

Owner reserves the right to perform visual inspections and to take bulk and air samples inside and outside the work area at any time during the project. Such activities shall be performed by Owner's Representative. The Contractor has the right to observe and to review the results.

Documentation and Notices

Owner reserves the right to document any positive or negative findings during visual inspections. Such findings shall be provided in writing if requested by the Asbestos Abatement Contractor.

Asbestos Abatement Contractor has the right to review such documentation and respond in writing to any point with which Asbestos Abatement Contractor disagrees. The decision of Owner's Asbestos Representative concerning acceptable levels of cleanliness is final. The Asbestos Abatement Contractor shall abide by such decision and correct all deficient conditions to amend unsatisfactory findings to the acceptance of Owner.

In case of a written notice of deficiency, Asbestos Abatement Contractor shall sign the notice. The signature shall represent only that Asbestos Abatement Contractor acknowledges receipt of the notice and shall not be construed as agreement with the findings.

Air Monitoring - Asbestos Abatement Contractor

Asbestos Abatement Contractor shall conduct daily air monitoring of its employees engaged in asbestos related work regardless of initial results.

Asbestos Abatement Contractor shall submit to Owner, results of air sample analysis within forty-eight (48) hours of completion of shift during which samples were taken.

Final Visual Inspections

Owner, or Owner's Asbestos Representatives reserve the right to make visual inspections of the work areas to evaluate progress, compliance with specifications and regulations, appropriate work procedures, and such other matters that may, if improper, create additional risk or liability for Owner.

Final Visual Inspection

1. Asbestos Abatement Contractor shall have the responsibility to notify Owner's Asbestos Representative a minimum of twenty-four (24) hours in advance of the readiness for final visual inspection at each containment location.
2. Owner's Asbestos Representative and Asbestos Abatement Contractor shall make a final visual inspection of each work area. Visual inspection shall be based on Scope of Work, Specification requirements, and generally accepted industry standards for cleanliness.
3. For removal, no residual material which can be removed by hand pressure or moderate abrading shall remain.

Air Monitoring - Representative

Owner's Representative may conduct air monitoring inside and outside the work area as determined warranted to represent the interests of Owner.

Air sampling inside the work area which results in fiber counts greater than 0.1 f/cc (full-face, PAPR respirator in positive mode in use) or 1% of the rated protection limit of other respiratory protection in use at the time of sampling shall be deemed a necessary and sufficient reason to issue a STOP WORK order.

Air sampling outside the work area which results in fiber counts higher than 0.01 f/cc, or baseline levels shall be deemed a necessary and sufficient reason to issue a STOP WORK order.

Final Air Clearances will be required for each containment area which includes disturbance of ACM in compliance with AHERA requirements. Negative pressure ventilation units shall remain in operation until Contractor receives notification from Owner's Representative that final air clearance for each containment area has meet specified clearance criteria.

Analysis of Final Clearance sampling shall be by TEM – AHERA method

At the discretion of Owner, PCM method may be utilized for clearance purposes where allowed under AHERA requirements.

Final Air Clearance Criteria

Owners' Asbestos Representative shall collect a total of five (5) air samples within each individual containment area in accordance with industry standards and shall submit each sample to an independent, accredited analytical laboratory for analysis. Lab and

field blanks will be submitted with each set of clearance samples but may not be analyzed unless the determination of any clearance is disputed.

Containment areas shall remain off limits to non-abatement personnel and containments shall remain negatively pressurized until such time that results are received and determined to pass or fail the stipulated clearance criteria.

Any clearance which fails to meet the stipulated clearance criteria shall be rerun after the containment is re-cleaned by the Contractor. The responsibility to pay for all supplemental clearance rounds shall be at the discretion of the Owner and/or the Supervising General Contractor.

PCM Clearance Criteria: reading of less than 0.01 f/cc for each interior air sample.

TEM: Clearance will be an average reading of less than 70 structures per square millimeter for each air sample collected as part of any clearance.

Contractor shall re-clean all Containment areas with results which exceed specified clearance levels shall be re-cleaned and re-tested until clearance criteria is met. Contractor shall be responsible for all costs associated with additional clearance rounds.

END OF SECTION

**PRE-RENOVATION
ASBESTOS SURVEY,
LEAD-BASED PAINT INSPECTION,
PCB & MERCURY SURVEY REPORT**

**ROOSEVELT ELEMENTARY SCHOOL
2324 VERDE STREET
BAKERSFIELD, CALIFORNIA**

February 16, 2023

PREPARED FOR:

**Mr. Daniel Wastaferrero
Assistant Director II
Bakersfield City School District
Maintenance, Operations & Facilities Department
1501 Feliz Drive
Bakersfield, California 93307**

PREPARED BY:

**T. BROOKS & ASSOCIATES,
A Division of
Provost & Pritchard Consulting Group
455 W. Fir Ave.
Clovis, California 93611
(559) 449-2700**

**Troy F. Brooks, RRC, CAC, CIEC
Registered Roof Consultant
Certified Asbestos Consultant, #92-0186
DPH Inspector/Assessor for Lead, #193
Certified Indoor Environmental Consultant**

Roof Consulting / Asbestos, Lead & IAQ Consulting



455 W Fir Avenue
Clovis, CA 93611-0242
Tel: (559) 449-2700
Fax: (559) 449-2715

www.provostandpritchard.com

February 16, 2023

Project # 02854-22-002

Mr. Daniel Wastaferro
Assistant Director II
Bakersfield City School District
Maintenance, Operations & Facilities Department
1501 Feliz Drive
Bakersfield, California 93307

**SUBJECT: Pre-Renovation Asbestos Survey, Lead-Based Paint Inspection,
PCB & Mercury Survey Report
Roosevelt Elementary School
2324 Verde Street
Bakersfield, California**

Dear Mr. Wastaferro:

In accordance with your request and authorization, **T. Brooks & Associates, A division of Provost & Pritchard Consulting Group**, has conducted a limited survey involving the above referenced elementary school located in Bakersfield, California. The survey included a limited evaluation of suspect asbestos-containing materials, lead-based paint, PCB light ballasts, and mercury light tubes. The survey was requested due to planned renovation operations involving certain buildings on the referenced campus with a limited evaluation of the remaining buildings. The Client wishes to be notified as to the presence of building materials and fixtures to be impacted by proposed renovation operations involving the subject site which may include any of the above referenced hazardous materials.

We appreciate the opportunity to assist you. If you should have questions or require additional information, please contact us at (559) 298-9135.

Respectfully,
T. BROOKS & ASSOCIATES, INC.

Troy F. Brooks, CAC, RRC, CIEC
Certified Asbestos Consultant, State of California, No. 92-0186
CDPH Accredited Lead Inspector/Assessor No. 193
Certified Indoor Environmental Consultant
Registered Roof Consultant

TABLE OF CONTENTS

	<u>Page</u>
INTRODUCTION.....	1
ASBESTOS INVESTIGATION.....	1
SITE DESCRIPTION	1
ASBESTOS SAMPLING.....	1
COMPREHENSIVE BUILDING SURVEY	2
LABORATORY FINDINGS - COMPREHENSIVE BUILDING SURVEY	3
LIMITED BUILDING SURVEY.....	4
LABORATORY FINDINGS - LIMITED BUILDING SURVEY	5
ANALYSIS OF FINDINGS - ALL BUILDINGS.....	5
RECOMMENDATIONS- ASBESTOS	8
LEAD INVESTIGATION.....	8
SUMMARY OF FINDINGS - LEAD	9
PAINT CONDITION	10
RECOMMENDATIONS- LEAD	10
LEAD WASTE DISPOSAL	11
PCB INVESTIGATION.....	11
STUDY AND CHARACTERIZATION.....	11
USE OF POLYCHLORINATED BYPHENYLS (PCB'S).....	12
CLASSIFICATION.	12
COMPARISON OF CALIFORNIA/U.S. EPA REGULATIONS.....	12
FINDINGS - PCB CONTAINING LIGHT BALLASTS.....	13
MERCURY-CONTAINING FLUORESCENT LIGHT TUBE INVESTIGATION.....	13
STUDY & CHARACTERIZATION.....	13
RECYCLING/DISPOSAL OF MERCURY CONTAINING ELEMENTS.....	14
FINDINGS (MERCURY CONTAINING ELEMENTS).....	14
MERCURY LIGHT TUBE ASSESSMENT.....	14
CLOSING STATEMENT.....	14
LIMITATIONS.....	14

BUILDING MATERIALS INVENTORY

TABLE 1

SUMMARY OF FLOURESCENT LIGHT BALLASTS & TUBES

TABLE 2

APPENDICES

Appendix A	Laboratory Report for Asbestos (PLM analysis)
Appendix B	Floor Plan Indicating Asbestos Sampling Locations, Lead Sampling Orientation & Positive Lead-Based Paint Reading Locations
Appendix C	XRF Results for Lead - All Readings
Appendix D	XRF Results for Lead - Positive Readings in Excess of 1.0 mg/cm ² (Lead-Based Paint)
Appendix E	Calibration Check Test Results
Appendix F	Lead Hazard Evaluation (Form 8552)
Appendix G	San Joaquin Valley Air Pollution Control District (Standard Forms)
Appendix H	Regulatory Resource List for Asbestos & Lead
Appendix I	Certifications - Professional & Laboratory Certifications

**PRE-RENOVATION
ASBESTOS SURVEY,
LEAD-BASED PAINT INSPECTION,
PCB & MERCURY SURVEY REPORT
ROOSEVELT ELEMENTARY SCHOOL
2324 VERDE STREET
BAKERSFIELD, CALIFORNIA**

INTRODUCTION

In accordance with your request and authorization, **T. Brooks & Associates, A Division of Provost & Pritchard Consulting Group**, has conducted a limited Asbestos Survey and Lead-Based Paint Inspection involving buildings located at the specified school campus located in Bakersfield, California. We also performed a limited, visual evaluation in regard to suspect PCB light ballasts and mercury-containing light tubes which included quantifying each on a room-by-room basis. The survey was requested due to proposed renovation operations impacting those structures at the site considered as part of our investigation. The following sections present a description of the structure, current site use, pertinent regulatory information, description of sampled materials and locations, analysis of findings and our recommendations specific to compliance with renovation operations based on our findings.

ASBESTOS INVESTIGATION

SITE DESCRIPTION

The subject property consists of a public school operated by Bakersfield City School District. Building materials considered as part of our investigation were limited to building materials which may be impacted by planned renovations operations as directed by the Client.

ASBESTOS SAMPLING

The inspection and sampling event involving the subject structure was conducted by Troy F. Brooks, Certified Asbestos Consultant, No. 92-0186 on January 17 & 18, 2023.

Current OSHA regulations include the regulation of construction activities which involve disturbance of asbestos-containing materials with any detectable level of asbestos, as defined

under 8 CCR 1529. Work operations disturbing such materials must be conducted in accordance with Cal/OSHA regulations as well as SJVAPCD & EPA regulations and requirements.

We were requested by the client to provide two levels of investigation at the school site based on the proposed scope of renovation. Only those buildings which were to undergo a full renovation included comprehensive sampling of suspect building materials, referred to below as **Comprehensive Building Survey**. Those buildings proposed for a limited scope of work included a more focused sampling protocol limited to, in general, walls and ceilings, with random sampling of other finishes. These buildings are included below in the **Limited Building Survey**.

COMPREHENSIVE BUILDING SURVEY

Representative samples were collected at specified interior and exterior locations of the following structures on the campus of the aforementioned elementary school as part of our onsite investigation. Those buildings on the referenced campus which included a comprehensive survey as requested by the Client included the following:

- Classrooms 5-22 & Associated Restrooms
- Accessory Rooms between Classrooms 11 and 12
- Accessory Rooms between Classrooms 15 and 16
- Restrooms west of Classroom 17
- Restrooms and Accessory Rooms west of Classroom 22
- Main Administration Staff Area Room
- Staff Restrooms, Custodial and Offices North of Admin. Bldg.
- Chiller Yard Materials

Materials to be sampled were at the discretion of the sampler and were selected based upon the likelihood of containing asbestos as an integral or incidental part of their construction. Samples were analyzed by an AIHA and NVLAP accredited analytical laboratory. Refer to **Appendix I** for Professional Certifications.

Materials selected for sampling and subsequent laboratory analysis included the following:

LOCATION: Comprehensive Buildings

Sampled Materials	Classification	Friability *
Wall Materials		
- Plaster w/ Paint	Miscellaneous Material	Cat. II, N.F.
- Plaster	Miscellaneous Material	Cat. II, N.F.
- 4" Cove Base w/ Adhesive	Miscellaneous Material	Cat. II, N.F.
- 3" Cove Base w/ Adhesive	Miscellaneous Material	Cat. II, N.F.
- Stucco	Miscellaneous Material	Cat. II, N.F.
- Particle Board Panel	Miscellaneous Material	Cat. II, N.F.
- Drywall w/ Taping Mud & Texture	Miscellaneous Material	Cat. II, N.F.
- Drywall w/ Taping Mud	Miscellaneous Material	Cat. II, N.F.
- FRP Adhesive	Miscellaneous Material	Cat. II, N.F.
Ceiling Materials		
- 2'x4' Ceiling Tile (w/ pinholes)	Miscellaneous Material	RACM
- 2'x2' Ceiling Tile	Miscellaneous Material	RACM
- 2'x4' Ceiling Tile (w/ squiggly lines)	Miscellaneous Material	RACM
- 12"x12" Ceiling Tile	Miscellaneous Material	RACM
Flooring Materials		
- Carpet Mastic/Backing	Miscellaneous Material	Cat. II, N.F.
- Vinyl Sheet Flooring w/ Mastic	Miscellaneous Material	RACM
- Carpet Adhesive	Miscellaneous Material	Cat. II, N.F.**
- Residual Floor Mastic	Miscellaneous Material	Cat. I, N.F.**
Miscellaneous Materials		
- Built-up Roofing w/ Silver Coating	Miscellaneous Material	Cat. I, N.F.
- Built-up Roofing w/ Foam	Miscellaneous Material	Cat. I, N.F.
- Asphalt Shingle w/ Felt	Miscellaneous Material	Cat. I, N.F.
- Window Glazing	Miscellaneous Material	Cat. II, N.F.
- Attic Insulation	Miscellaneous Material	RACM

* These classifications are based on classifications by the AHERA regulations of the Environmental Protection Agency. All asbestos containing materials may be rendered friable by the forces acting upon them. The NESHAP category is based on the observed condition of each material at the time of the inspection and does not reflect the future condition of the materials impacted by the proposed renovation.

** Vinyl floor tile and flooring mastics are typically classified as Category I, Non-Friable for the purposes of abatement. If the event these materials are removed using mechanical means, they are reclassified as RACM and would fall under SJVAPCD regulations.

LABORATORY FINDINGS – COMPREHENSIVE BUILDING SURVEY

Bulk Sample Results

Of those samples submitted for analysis, nine (9) tested positive for asbestos. The samples testing positive for asbestos content in amounts >1.0% included: **Window Glazing** (5

samples), **Built-up Roofing w/ Silver Coating** (4 samples). The remaining samples tested negative for asbestos content.

Assumed Asbestos-Containing Materials

The following suspect building materials were assumed by the inspector as "Assumed" asbestos-containing materials:

- Insulated Piping Systems (in walls, above ceilings, and in attic spaces)
- Wall & Ceiling Adhesives at chalkboards, wall boards, wall and ceiling tiles mirrors and wall and ceiling-mounted fixtures
- Cementitious chalk boards

LIMITED BUILDING SURVEY

Representative samples were collected at specified interior and exterior locations of the following structures on the campus of the aforementioned elementary school as part of our onsite investigation. Those buildings on the referenced campus which included a limited survey as requested by the Client included the following:

- Building "A" – all remaining rooms west of Admin and Multi-Purpose, Main Corridor, Lounge, Stage & Kitchen,
- Relocatable Classrooms R9, 23-26, 28-29 & 34-36

<u>Sampled Materials</u>	<u>Classification</u>	<u>Friability</u>
Wall Materials		
- Plaster	Miscellaneous Material	Cat. II, N.F.
- 3" Cove Base w/ Adhesive	Miscellaneous Material	Cat. II, N.F.
- 4" Cove Base w/ Adhesive	Miscellaneous Material	Cat. II, N.F.
- 6" Cove Base w/ Adhesive	Miscellaneous Material	Cat. II, N.F.
- Drywall w/ Taping Mud & Texture	Miscellaneous Material	Cat. II, N.F.
- Soft-Soak Wall Panel	Miscellaneous Material	Cat. II, N.F.
- Soft-Soak Wall Panel w/ Drywall	Miscellaneous Material	Cat. II, N.F.
- Stucco	Miscellaneous Material	Cat. II, N.F.
Ceiling Materials		
- 2'x4' Ceiling Tile (squiggly lines)	Miscellaneous Material	RACM
- 2'x4' Ceiling Tile (pinholes)	Miscellaneous Material	RACM
- 12"x12" Ceiling Tile	Miscellaneous Material	RACM
Flooring Materials		
- Carpet Adhesive	Miscellaneous Material	Cat. I, N.F.
- Carpet Adhesive	Miscellaneous Material	Cat. II, N.F.**

- Vinyl Sheet Flooring w/ Mastic	Miscellaneous Material	Cat. II, N.F.
- Vinyl Sheet Flooring w/ Mastic/Lev & Leveling Compound	Miscellaneous Material	Cat. II, N.F.

Miscellaneous Materials

- No Samples Fit Category

LABORATORY FINDINGS – LIMITED BUILDING SURVEYS

Bulk Sample Results

Of those samples submitted for analysis, none (0) tested positive for asbestos.

Assumed Asbestos-Containing Materials

The following suspect building materials were assumed by the inspector as “Assumed” asbestos-containing materials:

- Insulated Piping Systems (in walls, above ceilings, and in attic spaces)
- Wall & Ceiling Adhesives at chalkboards, wall boards, wall and ceiling tiles mirrors and wall and ceiling-mounted fixtures
- Cementitious chalk boards

Refer to **Tables 1 & 2** for additional information on sample descriptions and locations, including those samples testing positive for asbestos or assumed as positive.

ANALYSIS OF FINDINGS – ALL BUILDINGS

Under EPA regulations, asbestos-containing materials are classified by their "Friability" which is defined as material that when dry may be crumbled, pulverized, or reduced to powder by hand pressure. In addition, the "Friability" classification is not only determined by the nature and condition of the ACM, but also by work practices to which the material may be exposed during demolition activities. The "Friability" classification is critical in determining the applicable regulations, work practices, and disposal requirements. Workers engaged in the abatement and/or demolition activities involving referenced materials would be covered by applicable Cal/OSHA regulations.

Those building materials testing positive for asbestos in amounts >1.0% would be classified as “Asbestos-Containing Materials” under OSHA regulations. Work activities involving disturbance of building materials containing asbestos in any amount would be classified as “Asbestos-Containing Construction Material (ACCM)” under Cal/OSHA regulations. All building

materials at specified locations testing negative for asbestos content may be treated as non-asbestos containing in terms of proposed renovation operations.

The results herein enclosed are representative only of those locations of the subject structure where bulk sampling was performed. These results may not be construed as pertaining to building locations or locations not specifically referenced, or at other untested locations on the subject property. Should additional work be conducted which will disturb additional suspect asbestos-containing materials not referenced in this report, or at other untested locations, all such materials must be sampled in accordance with applicable regulations or assumed to be asbestos-containing. All waste must be transported and disposed of in accordance with applicable state, federal and local regulations.

Window Glazing

Representative samples of window glazing collected at the subject site were found to contain regulated levels of asbestos. Based on these findings, all window glazing on the subject property would be considered to be asbestos-containing for the purposes of demolition operations involving the subject property. The material would be classified as "Regulated Asbestos-Containing Material" and must transported and disposed of as "Asbestos-Containing Hazardous Waste" in accordance with state and federal requirements. Workers engaged in the abatement work would be covered under applicable Cal/OSHA regulations. The work would be a "Class II" job under Cal/OSHA regulations. The work would require compliance with the requirements of the San Joaquin Valley Air Pollution Control District. The material must be disposed of as "Asbestos-Containing Hazardous Waste".

Reflective Roof Coating

Reflective roof coatings commonly contain asbestos as fiber reinforcement. Under current Cal-OSHA regulations, reflective roof coatings are classified as "Regulated Asbestos-Containing Material". Abatement of this material would fall under the jurisdiction of the NESHAP for purposes of abatement, transportation and disposal. Removal must be completed utilizing hand tools only. Removal of asbestos-containing roof coatings would be classified as a Class II operation under Cal-OSHA. Transportation and disposal of "Regulated Asbestos Containing Material" requires the use of a Hazardous Waste Manifest and transportation must be by a hazardous waste hauler licensed in California.

Asphalt Roof Components- Built-up Roofing

Asphalt based roofing products in intact condition are classified as non-friable in terms of abatement operations. Removal of roofing materials would be classified as a Class II operation.

Notification to the local Cal-OSHA office is required prior to commencement with operations which will disturb these materials. These materials would not be regulated by the EPA if removal is performed utilizing hand tools and prescribed methods. Those materials classified as friable materials, and therefore “Regulated Asbestos Containing Material” would require use of a “Hazardous Waste Manifest” to document proper transportation and disposal.

Wall/Ceiling and Fixture Adhesive - Assumed

All adhesives used for the purposes of adhering mirrors, white-boards, chalkboards, fibrous wall panels and wall and ceiling tiles, as well as other wall and ceiling-mounted fixtures area assumed as asbestos-containing material except for those specific locations where adhesive samples were collected and submitted for analysis and determined to be negative for asbestos content. Under current Cal/OSHA regulations, adhesives and mastics are classified as non-friable ACM. Removal must be completed utilizing hand tools only to preclude rendering the material friable. Removal of wall paneling adhesive would be a Class II operation under Cal/OSHA regulations. If if non-friable condition, the waste may be disposed of as non-friable ACM at any landfill which accepts non-friable ACM.

Thermal System Insulation – Pipe Elbows & Insulation (Assumed & Identified)

Thermal System Insulation, consisting of pipe insulation and mudded elbows tested positive for regulated quantities of “Chrysotile” asbestos. Based on the laboratory findings, all pipe insulation and associated elbows and fittings material within specified areas of the subject school site must be treated as “Regulated Asbestos-Containing Material”. Thermal System Insulation is always classified as friable for purposes of abatement, transportation and disposal. Based on its classification as “Thermal System Insulation” by applicable EPA regulations, abatement of this material would be classified as a “Class I” abatement operation. Transportation and disposal of “Regulated Asbestos Containing Material” requires the use of a Hazardous Waste Manifest to document proper transportation and disposal. Transportation must be by a hazardous waste hauler licensed in California.

Asbestos Cement Products – Chalkboards (Assumed)

Asbestos cement products are normally classified as Category II, non-friable materials in terms of abatement operations, transportation, and disposal. Category II materials require disposal at an EPA accredited landfill and require use of a non-hazardous manifest. Cement products must be maintained in intact condition to be classified as non-friable.

Refer to **Table 1** for the Building Materials Inventory which indicates materials testing or assumed positive for asbestos. The laboratory analytical report and floor plans indicating sampling locations are included as **Appendices A & B**.

RECOMMENDATIONS - ASBESTOS

Prior to proceeding with any scheduled renovation and/or demolition operations involving those structures at the subject school site considered as part of our limited investigation, have all materials identified in this report as containing asbestos in amounts <1.0% amount which will be disturbed as part of the planned renovation and/or demolition operations removed by a qualified, licensed abatement contractor with a demonstrated history of similar projects and regulatory compliance.

Conduct additional bulk sampling and analysis of any additional suspect materials to be impacted by the proposed work operations which were not considered as part of our investigation as required under state, local and federal regulations.

Prior to proceeding with any scheduled abatement, renovation, or demolition operations, comply with the Notification requirements of Cal/OSHA where abatement activities are involved. File a completed notification with the SJVAPCD for abatement of RACM exceeding >160 s.f. or 260 l.f. as well as for any work operation classified as a "Demolition" under their requirements. Pay any required fee and wait the required 10-day waiting period where required before proceeding.

LEAD INVESTIGATION

Our investigation included a limited investigation involving lead in painted finishes affixed to interior and exterior areas of specified buildings on the subject school campus. The investigation included limited, representative testing of painted finishes for those structures at the subject school site which may be impacted by planned renovation activities using an XRF lead analyzing instrument to test for lead content. Testing of the remaining structures at the site which are proposed for minimal impact as part of the future renovation was limited to representative testing of interior and exterior walls only. The lead inspection was limited in scope in order to provide a general overview as to the lead content of painted finishes affixed to the subject structure. The inspection was not comprehensive and does not constitute a Lead Inspection as defined under CCR Title 17, Div. 1, Chapter 8.

The inspection and lead sampling event of the subject structures was conducted by Trevor Brooks, Lead Sampling Technician, No. 189 under the supervision of Troy Brooks, Inspector/Assessor for Lead, No. 193, and Timothy Thomas, Inspector/Assessor for Lead, No. 2883. Professional Certifications and Laboratory Certifications are presented in **Section 5**.

Scope of Investigation

The Lead-Based Paint Inspection was conducted in accordance with 8 CCR 1532.1 (Cal/OSHA) requirements. The sampling event was conducted in a manner which provides limited, representative evaluation of painted surfaces at referenced interior and exterior locations and was not comprehensive. The inspection provides a general overview as to the lead content in painted finishes affixed to the specified structure.

Sampling of painted surfaces for lead content included testing of three hundred and thirty-seven (337) separate testing combinations. The XRF instrument was calibrated prior to and following the prescribed sampling periods in accordance with the Performance Characteristic Sheet provided by the manufacturer. Calibration readings are included in the XRF sampling results as the initial and concluding readings and are designated as a “calibrate” reading. The calibration readings were compared to a known concentration of lead using a standard SRM sheet provided by the XRF manufacturer to verify accurate performance of the instrument at the beginning and the conclusion of the sampling episode.

Definition of Lead-Based Paint

Title X	>1.0 mg/cm ² or >0.5% by weight
HUD	1.0 mg/cm ² or >0.5% by weight
DPH	1.0 mg/cm ² or > 0.5% by weight
CPSC	600 ppm or 06% by weight
OSHA	600 ppm or 06% by weight or any detectable amount

SUMMARY OF FINDINGS – LEAD

In summary, some of the testing combinations considered as part of our limited investigation were found to contain lead in some amount. Under Cal/OSHA regulations, paint containing in excess of 0.06% lead (600 parts per million) are considered lead-containing paint for non-trigger tasks under Cal/OSHA. For trigger tasks, any detectable amount of lead invokes Cal/OSHA regulations and assumes that airborne levels may exceed the “Action Level” (AL) of 30 ug/m³, and the “Permissible Exposure Limit” (PEL) of 50 ug/m³. Refer to **Section 4** for additional information concerning regulatory requirements.

Current OSHA regulations require that building occupants, and workers involved in work disturbing lead containing surfaces be protected from exposure to lead above stipulated levels. Refer to the OSHA Construction Standard (CCR Title 8 1532.1 California Lead-In-Construction Standard) for work guidelines and requirements.

Of those testing combinations considered as part of our investigation, a total of seventy-two (72) were found to include lead in excess of the 1.0 mg/cm², (0.5%), (5,000 ppm) and would be classified as “Lead-Based Paint” (LBP) under state and federal regulations. Refer to **Appendices B - D** for additional information concerning specific Testing Combination locations found to include painted finishes containing lead at levels defined as “Lead-Based Paint”.

Any construction related work which will disturb building elements which include paint or surface coatings determined to include “Lead-Based Paint” must be conducted in accordance with applicable local, state, and federal regulations governing disturbance of lead. A lead waste characterization is required prior to disposing of components with lead, or the material must be disposed of as lead-containing waste under state and federal guidelines. In addition, Cal/OSHA regulates all activities involving the disturbance of paint which includes “any detectable” amount of lead.

PAINT CONDITION

As part of the Lead-Based Paint Inspection, painted surfaces were visually examined for general condition. While this report does not constitute a lead “Risk Assessment”, painted surfaces were generally categorized as being in intact, fair, poor, or peeling condition.

Refer to **Appendix D** for additional information concerning those testing combinations found to include “Lead-Based Paint”.

RECOMMENDATIONS - LEAD

All future construction-related work which includes the disturbance of “Lead-Based Paint” or “Lead-Containing Paint” must be conducted in compliance with Cal/OSHA requirements. Prior to engaging in work which will disturb lead finishes referenced herein, or other untested paints or surface coatings, the contractor engaged in the work must conduct an “Initial Exposure Assessment” for each planned “trigger task” in accordance with Cal/OSHA to determine potential lead exposures to workers. Prior to commencing such operations, the Contractor must assume workers will be exposed to airborne levels above the PEL and must

provide workers with Hazard Communication Training, and personal protective equipment, including HEPA-equipped respirators. A hand-washing facility must be present at the worksite.

Painted finishes classified as a "Lead Hazard" under state and federal regulations should be removed from the subject structures or stabilized prior to commencing work operations to prevent creating soil or dust hazards on the subject property. The work must be conducted in accordance with the HUD Guidelines and Cal/OSHA requirements using CDPH accredited lead workers and supervisors. A lead clearance must be conducted by an accredited lead Inspector/Assessor at the conclusion of the lead-related work.

Planned work operations involving disturbance of lead must be conducted in accordance with Cal/OSHA regulations, including use of a barrier system with water applied for dust suppression during the work operations. Refer to Cal/OSHA requirements.

LEAD WASTE DISPOSAL

Prior to disposal of elements which include "lead", the State of California requires that representative sample(s) of the waste stream waste (along with the substrate where bonded) be submitted to an accredited laboratory and that a Total Threshold Limit Concentration (TTLC) test be performed to determine the total lead content. Depending upon the result, a SW846 (STLC) may be required to determine the amount of leachable lead. These tests will determine transportation and disposal requirements and may greatly impact the ultimate cost of the work.

PCB INVESTIGATION

STUDY & CHARACTERIZATION

Our investigation included a limited study of possible PCB-containing fluorescent light ballasts in fluorescent light fixtures at interior locations considered as part of our investigation. The scope included disassembly of randomly selected fluorescent light fixtures in order to visually evaluate whether the current light ballasts are considered suspect PCB-containing. Our investigation was limited to visual identification and did not include physical sampling of light ballasts. Under normal circumstances, light ballasts which do not contain PCB-containing compounds include language indicating such. Our investigation was limited to fluorescent light fixtures and did not consider other possible PCB-containing equipment, including transformers and other electrical equipment at the direction of the Client. As part of our evaluation, the total number of light ballasts present was quantified per room as well as could be determined based on visual determination and random disassembly of randomly selected light fixtures.

USE OF POLYCHLORINATED BIPHENYLS (PCB'S)

Polychlorinated Biphenyl was formerly used as insulating fluid in transformers, capacitors, ballasts, and other electrical equipment. In general, these products were utilized up until 1978. Upon emptying electrical equipment, PCB may remain as a trace contaminant in the equipment, in turn to be found in the replacement fluid. PCB's can also be found in trace amounts in liquid residues that may accumulate normally in some natural gas pipelines.

Two (2) additional State of California, Proposition 65 elements defined as "chemicals known to cause cancer or reproductive toxicity" may be present as trace elements within PCB compounds and may be present in soot and smoke involving electrical equipment which contains PCB's. These include Polychlorinated dibenzo-p-dioxins (PCDD) and polychlorinated dibenzofurans (PCDF).

CLASSIFICATION

The Department of Toxic Substances Control (DTSC) has classified polychlorinated biphenyls (PCB's) as a hazardous waster when the concentrations are equal to or greater that 5 mg/l in liquids or when the total concentrations are equal or greater than 50 ppm, respectively. When the total concentrations of PCB's are equal to or greater than 5,000 ppm in water, DTSC then regulates this waster as an Extremely Hazardous Water (Title 22, CCR, 66261.11.113). The Office of Environmental Health Hazard Assessment is the primary agency concerning Proposition 65 Regulations. They can be reached at (916) 445-6900.

COMPARISON OF CALIFORNIA/U.S. EPA REGULATIONS

- With few exemptions, the U.S. EPA does not regulate liquids with PCB concentrations below 50 ppm. In California, however, liquid wastes with PCB concentrations equal to or greater than 5 ppm are classified as hazardous waste.
- Under U.S. EPA regulations, drained PCB-contaminated transformer carcasses are allowed to be disposed of in municipal landfills. California has classified drained waste transformer carcasses as hazardous waste if the oil that was drained from the carcasses had transformer oil with PCB concentrations equal to or greater than 5 ppm.
- There is no exemption under California DTSC regulation due to PCB quantity or size of the waster material that contains PCB's. Items such as fluorescent light ballasts with PCB capacitors are covered under California DTSC Regulations. Whereas Federal regulations would exempt them under the TSCA small capacitor definition.
- Individual states, including California do not have the right or authority to regulate use of PCB's. Therefore, there are not DTSC regulations that would require removal of an item that contained PCB's such as a transformer or fluorescent light ballast. Generators, however would still have to comply with appropriate Federal removal requirements if

applicable. DTSC hazardous water regulations apply only when and if material(s) which contain PCB's *becomes a waste*.

In the State of California, burning of used oil that contains PCB's above their detection limit (≥ 2 ppm) can only be done at DTSC-authorized facilities that have also met Federal requirements for this type of activity as outlined in Division 40 of the Code of Federal Regulations (9 CRF, Part 761).

FINDINGS – PCB CONTAINING LIGHT BALLASTS

During the course of our limited visual investigation, no (0) suspect PCB containing light ballasts were observed within any of the structures considered as part of our investigation.

The total estimated quantity of ballasts present at each room location, including suspect PCB-Containing and non-suspect PCB-containing ballasts were as follows:

Refer to **Table 2** for a summary of our ballast investigation at each room location.

MERCURY-CONTAINING FLUORESCENT LIGHT TUBE **INVESTIGATION**

STUDY & CHARACTERIZATION

As part of our site evaluation, we visually assessed existing fluorescent light tubes at randomly selected fluorescent light fixtures in order to determine if the light tubes were considered to be suspect mercury-containing. In addition, we provided an approximate quantity of light tubes in each room locations. Refer to the Table below for estimated quantities of light tubes.

Spent fluorescent light tubes and HID lamps are regulated by the Department of Toxic Substances Control because they contain mercury, which is listed as a presumptive hazardous waste in Appendix X, Chapter 11, Title 22, of the California Code of Regulations. Fluorescent light tubes and HID lamps typically contain concentrations of mercury (an inorganic persistent and bio-accumulative toxic substance) exceeding the Total Threshold Limit Concentration (TTLC) and/or Soluble Threshold Limit Concentration (STLC) values. The regulatory thresholds are 20 mg/kg and 0.2 mg/l, respectively, as noted in Section 66261.24 (a) (2) (A), 22 CCR.

RECYCLING/DISPOSAL OF MERCURY CONTAINING ELEMENTS

Spent fluorescent light tubes can be recycled, allowing for the recovery of the mercury, glass, and aluminum end caps. Within California, there are several facilities with Department authorization to accept non-RCRA fluorescent tubes for recycling.

The State of California allows a Generator to dispose as non-hazardous waste no more than a combined total of 25 spent fluorescent light tubes, regardless of size, in a day. Quantities greater than this, which are destined for land disposal, must be managed as a hazardous waste and are subject to land disposal restrictions.

FINDINGS (MERCURY CONTAINING ELEMENTS)

All spent fluorescent light tubes which are removed from light fixtures and disposed of in conjunction with the proposed renovation project may be disposed of as non-hazardous waste as long as the total does not exceed 25 total tubes per day. Should the total exceed 25 spent tubes per day, under State of California regulations, they must be treated as mercury-containing hazardous waste in California. Based upon our limited investigation, the total number of fluorescent light tubes was quantified and is included below. Quantification is by specific site location.

MERCURY LIGHT TUBE ASSESSMENT

The total estimated quantity of fluorescent light tubes present at each room location are included in **Table 2**.

CLOSING STATEMENT

This report is limited to the specified building locations and is not intended to represent other buildings or locations at the subject site.

LIMITATIONS

The asbestos, lead-based paint, PCB and mercury investigation and review of the subject school site location was limited in scope and was intended to evaluate referenced hazards based on the proposed scope provided by the Client. This investigation is undertaken with the calculated risk that the presence, full nature, and extent of the presence and locations of asbestos-containing materials, lead-paint, PCB ballasts and mercury-containing elements would not be revealed by visual observation and limited, random sampling alone.

T. Brooks & Associates, a Division of Provost & Pritchard Consulting Group, makes no representations as the presence of asbestos, lead, PCB, or Mercury-containing materials and finishes involving materials or systems which were not considered as part of our investigation, or which were inaccessible to the inspector at the time of the investigation. The investigation of possible PCB and mercury-containing elements was based on a limited visual survey and did not include sampling or test analysis of the referenced elements. **T. Brooks & Associates, a Division of Provost & Pritchard Consulting Group**, relied upon information provided by equipment manufacturers in making conclusions related to PCB and mercury-containing equipment and elements.

Certain opinions and recommendations expressed in this report are based on our knowledge and experience with applicable state, federal and local law, and do not reflect other possible adverse conditions not immediately visible or which may be discovered by a more extensive examination including a review of relevant documents which were not provided.

The sampling strategies for asbestos, lead-based paint, PCB ballast, and mercury light tubes were limited as indicated and are not intended to represent materials at untested locations.

Findings presented in this report were based on field observations, random sampling and analysis, review of available data and discussion with local regulatory and advisory agencies. Therefore, the data obtained are clear and accurate only to the degree implied by the sources and methods involved.


The information presented herewith was based on professional interpretation using presently accepted methods with a degree of conservatism deemed proper as of the report date. It is not warranted that such data and/or methods cannot be superseded by future technical developments.

Sincerely,

**T. Brooks & Associates, A Division of
Provost & Pritchard Consulting Group**



Troy F. Brooks, CAC, CDPH, CIEC
Principal Environmental & Roofing Specialist
Certified Asbestos Consultant, No. 92-0186
CDPH Accredited Lead Inspector/Assessor No. 193
Certified Indoor Environmental Consultant



David Norman, Principal

Table 1
BUILDING MATERIALS INVENTORY
Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Building: Administration Building (A)			Room Name/No: Office in Remodel Area 1		
Room Dimensions (ft.): L: 17' W: 11' 9" H: 7' 6"			Total Room Ft ² : 200		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	A-1-1	Tan Carpet & Mastic/Backing (Brown/Tan)	Wood	ND	
Walls	A-2-2	Plaster with Texture (Sand Finish)		ND	
Walls	Assumed	Tackboard & Adhesive - 3 Tackboards; Note: Unable to sample without causing considerable damage	Plaster	ACM	N
Cove Base	A-7-1	4" Brown Cove Base & Mastic (Yellow) Note: Room also includes wood base boards (1"x4" lumber)	Plaster	ND	
Ceiling	A-3-1	2' x 4' Ceiling Tile (Drop-down) with squiggly lines		ND	
Above Ceiling		Fiberglass Batt Insulation; Exposed Wood Framing		NS	
Attic		Electrical Conduit/Wiring		NS	
Lights		4 Ballasts / 8 Light Tubes / 2 Fixtures			

Building: Administration Building (A)			Room Name/No: Storage Room in Remodel Area 1		
Room Dimensions (ft.): L: 6' 6" W: 3' H: 8'			Total Room Ft ² : 20		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Brown Vinyl Sheet Flooring & Mastic Note: Per sample result A-5-1	Wood	ND	
Walls	A-2-1	Plaster with Texture (Sand Finish)	Plaster	ND	
Cove Base		4" Grey Cove Base & Mastic Note: Per sample result A-7-1		ND	
Ceiling		Drywall, Taping Mud & Texture Note: Per sample result A-6-2		ND	
Lights		N/A			

Building: Administration Building (A)			Room Name/No: Janitor Room in Remodel Area 1		
Room Dimensions (ft.): L: 5' 8" W: 3' H: 8'			Total Room Ft ² : 17		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Brown Vinyl Sheet Flooring & Mastic Note: Per sample result A-5-1	Wood	ND	
Walls	A-6-2	Drywall, Taping Mud & Texture (Sand Finish)		ND	
Cove Base		4" Grey Cove Base & Mastic Note: Per sample result A-7-1	Drywall	ND	
Ceiling		Drywall, Taping Mud & Texture Note: Per sample result A-6-2		ND	
Lights		N/A			

Building: Administration Building (A)			Room Name/No: Restroom in Remodel Area 1		
Room Dimensions (ft.): L: 7' W: 7' H: 8'			Total Room Ft ² : 49		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Brown Ceramic Tile & Mortar	Wood	NS	
Walls	A-6-1	Drywall, Taping Mud & Texture		ND	
Cove Base		None			
Ceiling		Drywall, Taping Mud & Texture Note: Per sample result A-6-1		ND	
Lights		N/A			

Building: Administration Building (A)			Room Name/No: Staff Restroom in Remodel Area 1		
Room Dimensions (ft.): L: 6' 6" W: 6' H: 9' 0"			Total Room Ft ² : 39		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Brown Ceramic Tile & Mortar	Wood	NS	
Walls		Drywall & Taping Mud Note: Per sample result A-6-1		ND	
Walls		Ceramic Tile & Mortar Note: Ceramic Tile, from floor up, covers 50% of Wall space	Drywall	NS	
Cove Base		None			
Ceiling		Drywall, Taping Mud & Texture Note: Per sample result A-6-2		ND	
Lights		N/A			

Building: Administration Building (A)			Room Name/No: Restroom Alcove in Remodel Area 1		
Room Dimensions (ft.): L: 14' 6" W: 6' 4" H: 7' 9"			Total Room Ft ² : 91		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	A-5-1	Brown Vinyl Sheet Flooring & Mastic (Yellow)	Wood	ND	
Walls		Plaster (Sand Finish) Note: Per sample result A-2-1		ND	
Cove Base		1" x 4" Wood Baseboard with Baseshoe (Nailed)	Plaster	NS	
Ceiling	A-4-1	2' x 4' Ceiling Tile (Drop-down) with Pinholes		ND	
Above Ceiling		Fiberglass Batt Insulation; Exposed Wood Framing		NS	
Attic		Electrical Conduit/Wiring		NS	
Lights		4 Ballasts / 8 Light Tubes / 2 Fixtures			

Building: Administration Building (A)			Room Name/No: Principal's Office		
Room Dimensions (ft.): Not Available			Total Room Ft ² : Not Available		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
No Access					

Building: Administration Building (A)			Room Name/No: Admin Office		
Room Dimensions (ft.): L: 29' 9" W: 29' 3" H: 10'2"			Total Room Ft ² : 870		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	A-8-1	Multi-Colored Green Carpet & Mastic	Wood	ND	
Walls	A-11-2	Drywall, Taping Mud & Texture		ND	
Walls	A-11-3	Drywall, Taping Mud & Texture		ND	
Walls	A-13-1, A-13-2 & A-13-3	Plaster		ND	
Walls	Note: Drywall - North & West Walls; Plaster - South Wall; Drywall & Plaster - East Wall				
Cove Base	A-10-1	4" Green Cove Base & Mastic	Drywall	ND	
Ceiling	A-9-1	2' x 4' Ceiling Tile - Drop Down		ND	
Above Ceiling		Fiberglass Batt Insulation		NS	
2nd Ceiling		Plaster Note: Per sample result A-13-1		ND	
Lights		20 Ballasts / 40 Light Tubes / 10 Fixtures			

Building: Administration Building (A)			Room Name/No: Admin Hallway		
Room Dimensions (ft.): L: 103' W: 13' H: 12' 9"			Total Room Ft ² : 1,339		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Brown Vinyl Sheet Flooring & Mastic Note: Per sample result A-5-1	Wood	ND	
Walls	A-15-1	Plaster (Sand Finish)		ND	
Cove Base		1" x 4" Wood Baseboard with Baseshoe (Nailed)		NS	
Ceiling		Plaster (Sand Finish) Note: Per sample result A-15-1		ND	
Lights		12 Ballasts / 24 Light Tubes / 6 Fixtures			

Building: Administration Building (A)			Room Name/No: Health Office		
Room Dimensions (ft.): L: 16' 6" W: 10' 3" H: 9'			Total Room Ft ² : 169		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Brown Vinyl Sheet Flooring & Mastic Note: Per sample result A-5-1 Note: Same flooring as in Admin Hallway	Wood	ND	
Walls	A-11-1	Drywall, Taping Mud & Texture		ND	
Cove Base	A-14-1	4" Tan Cove Base & Mastic (Yellow)		ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Per sample result A-9-1		ND	
Above Ceiling		Fiberglass Batt Insulation		NS	
2nd Ceiling		Plaster Note: Per sample result A-15-1		ND	
Lights		4 Ballasts / 4 Light Tubes / 2 Fixtures			

Building: Administration Building (A)			Room Name/No: Health Office Restroom		
Room Dimensions (ft.): L: 5' 3" W: 4' 8" H: 8'			Total Room Ft ² : 25		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Grey Ceramic Tile & Grout	Wood	NS	
Walls		Drywall (Painted) Note: Per sample result A-11-1		ND	
Walls		Ceramic Tile & Grout Note: Ceramic Tile, from floor up, covers 40% of Wall space	Drywall	NS	
Cove Base		None			
Ceiling		Drywall, Taping Mud & Texture Note: Per sample result A-11-1			
Lights		N/A			

Building: Administration Building (A)			Room Name/No: Teacher's Room		
Room Dimensions (ft.): L: 16' 6" W: 11' H: 9'			Total Room Ft ² : 182		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Multi-Colored Green Carpet & Carpet Mastic Note: Per sample result A-8-1 Note: Same carpet as in Admin Office	Wood	ND	
Walls		Drywall & Taping Mud (Painted) Note: Per sample result A-11-1		ND	
Column		Plaster (Smooth) Note: Per sample result A-13-1		ND	
Cove Base		4" Green Cove Base & Mastic Note: Per sample result A-14-1	Wood	ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Per sample result A-9-1		ND	
Above Ceiling		Fiberglass Batt Insulation; Exposed Wood Framing		NS	
2nd Ceiling		Plaster Note: Per sample result A-13-1		ND	
Lights		6 Ballasts / 9 Light Tubes / 3 Fixtures			

Building: Administration Building (A)			Room Name/No: Mail Room		
Room Dimensions (ft.): L: 24' 9" W: 5' 8" H: 9' 10"			Total Room Ft ² : 140		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Multi-Colored Black Carpet & Carpet Mastic Note: Per sample result A-8-1	Wood	ND	
Walls		Drywall (Painted) Note: North, East & West Walls; Per sample result A-11-1		ND	
Walls		Plaster (Smooth) Note: South Wall; Per sample result A-13-1		ND	
Cove Base		4" Green Cove Base & Mastic Note: Per sample result A-14-1	Wood	ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Same as Admin; Per sample result A-9-1		ND	
Above Ceiling		Fiberglass Batt Insulation		NS	
2nd Ceiling		Plaster Note: Per sample result A-13-1		ND	
Lights		6 Ballasts / 6 Light Tubes / 3 Fixtures			

Building: Administration Building (A)			Room Name/No: Bookroom		
Room Dimensions (ft.): L: 20' W: 19' H: 9' 10"			Total Room Ft ² : 380		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Multi-Colored Carpet & Carpet Mastic Note: Per sample result A-8-1	Wood	ND	
Walls		Drywall (Painted) Note: South & East Walls; Per sample result A-11-1		ND	
Walls		Plaster (Smooth) Note: North & West Walls; Per sample result A-13-1		ND	
Cove Base		4" Green Cove Base & Mastic Note: Per sample result A-14-1	Plaster & Drywall	ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Same as Admin; Per sample result 9-1-1		ND	
Above Ceiling		Fiberglass Batt Insulation		NS	
2nd Ceiling		Plaster Note: Per sample result A-13-1		ND	
Lights		12 Ballasts / 14 Light Tubes / 6 Fixtures			

Building: Administration Building (A)			Room Name/No: Supervisor		
Room Dimensions (ft.): L: 15' W: 9' 3" H: 9' 10"			Total Room Ft ² : 139		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Multi-Colored Green Carpet & Carpet Mastic Note: Per sample result A-8-1 Note: Same carpet as in Admin Office	Wood		
Walls		Drywall Note: North & East Walls; Per sample result A-11-1		ND	
Walls		Plaster (Smooth) Note: South & West Walls; Per sample result A-13-1		ND	
Walls	Assumed	Soft Soak Wall Panel & Adhesive Note: Covers 25% of Wall Note: Unable to sample without causing considerable damage		ACM	N
Cove Base		4" Green Cove Base & Mastic Note: Per sample result A-14-1	Plaster & Drywall	ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Same as Bookroom; Per sample result 9-1-1			
Above Ceiling		Fiberglass Batt Insulation		NS	
2nd Ceiling		Plaster Note: Per sample result A-13-1		ND	
Lights		2 Ballasts / 4 Light Tubes / 1 Fixture			

Building: Administration Building (A)			Room Name/No: Conference Room		
Room Dimensions (ft.): L: 15' 4" W: 10' 4" H: 10' 6"			Total Room Ft ² : 158		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Blue Carpet & Adhesive - 95% of Flooring Note: Per sample result A-8-1			
Flooring		Black Carpet & Adhesive - 5% of Flooring at Entrance Note: Per sample result A-8-1			
Walls		Plaster (Smooth) Note: Per sample result A-13-1		ND	
Walls	Assumed	Soft Soak Wall Panel & Adhesive Note: Covers 60% of Wall Note: Unable to sample without causing considerable damage	Plaster	ACM	N
Cove Base		4" Black Cove Base & Mastic Note: Per sample result A-14-1		ND	
Ceiling		Plaster (Smooth) Note: Per sample result A-13-1		ND	
Lights		2 Ballasts / 4 Light Tubes / 1 Fixture			

Building: Administration Building (A)			Room Name/No: Foyer		
Room Dimensions (ft.): Not Available			Total Room Ft ² : Not Available		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
No Information					

Building: Administration Building (A)			Room Name/No: Library		
Room Dimensions (ft.): L: 40' W: 26' H: 11'			Total Room Ft ² : 1,040		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Blue Multi-Colored Carpet & Mastic Note: Per sample result A-8-1	Wood		
Walls		Plaster (Smooth) Note: Per sample result A-13-1		ND	
Walls	Assumed	Soft Soak Wall Panel & Adhesive Note: Covers 100% of Walls Note: Unable to sample without causing considerable damage	Plaster	ACM	N
Cove Base		4" Black Cove Base & Mastic (Beige) Note: Per sample result A-14-1		ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Per sample result 9-1-1		ND	
Above Ceiling		Fiberglass Batt Insulation		NS	
2nd Ceiling		Plaster Note: Per sample result A-13-1		ND	
Lights		15 Ballasts / 60 Light Tubes / 15 Fixtures			

Building: Administration Building (A)			Room Name/No: MPR - Cafeteria		
Room Dimensions (ft.): L: 70' W: 50' 6" H: 18'			Total Room Ft ² : 3,535		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	A-16-1	Tan Vinyl Sheet Flooring & Mastic	Wood	ND	
Walls		Plaster with Skim Coat Note: On 20% of Walls; Per sample result A-20-1	Concrete	ND	
Walls		1' x 1' Wall Tile Note: Throughout on Upper half of Walls	Concrete		
	Assumed	Adhesive on 1' x 1' Wall Tile; Note: Unable to sample without causing considerable damage		ACM	N
Walls	Assumed	Tackboard & Adhesive Note: Throughout on bottom half of Walls Note: Unable to sample without causing considerable damage	Concrete	ACM	N
Cove Base	A-17-1	3" Tan Cove Base & Mastic (Yellow)		ND	
Ceiling		Plaster (Assumed - No Access) Note: Per sample result A-20-1		ND	
Ceiling		1' x 1' Ceiling Tile	Plaster		
	Assumed	Adhesive on 1' x 1' Ceiling Tile; Note: Unable to sample without causing considerable damage		ACM	N
Attic		No Access			
Lighting		No information documented			

Building: Administration Building (A)			Room Name/No: MPR - Staff Lounge		
Room Dimensions (ft.): L: 26' W: 22' 6" H: 9'			Total Room Ft ² : 585		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	A-18-1	Grey Vinyl Sheet Flooring & Mastic (Yellow) with Leveler		ND	
Walls	A-19-1	Drywall, Taping Mud & Texture		ND	
Walls	Assumed	Tackboard & Adhesive	Plaster	ACM	N
Note: Unable to sample without causing considerable damage					
Cove Base		4" Green Cove Base & Mastic (Brown) Note: Per sample result A-14-1		ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Per sample result 9-1-1		ND	
Above Ceiling		Fiberglass Batt Insulation		NS	
2nd Ceiling		Plaster Note: Per sample result A-20-1		ND	
Lights		10 Ballasts / 30 Light Tubes / 10 Fixtures			

Building: Administration Building (A)			Room Name/No: MPR - Kitchen		
Room Dimensions (ft.): L: 47' W: 22' 6" H: 12' 6"			Total Room Ft ² : 1,058		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Concrete with Epoxy Floor Coating	Concrete	NS	
Walls	A-20-1	Plaster (Smooth); Note: 50% of Wall area		ND	
Walls		Fiberglass Reinforced Panels Note: 40% of Wall area		NS	
	Assumed	Adhesive Assumed Note: Unable to sample without causing considerable damage		ACM	N
Walls	Assumed	Tackboard & Adhesive (4 Tackboards)	Plaster	ACM	N
Note: Unable to sample without causing considerable damage					
Walls		Stainless Steel Wall Panels; Note: 5% of Wall area	Plaster	NS	
Cove Base		6" Concrete with Epoxy Floor Coating	Concrete	NS	
Ceiling		Plaster Note: Per sample results A-22-1		ND	
Lights		28 Ballasts / 42 Light Tubes / 14 Fixtures			

Building: Administration Building (A)			Room Name/No: MPR - Stage Area		
Room Dimensions (ft.): L: 21' W: 50' 6" H: 15' 6"			Total Room Ft ² : 1,060		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Brown Stair Tread over Wood	Plaster		
	Assumed	Adhesive Assumed Note: Unable to sample without causing considerable damage		ACM	N
Note: Stage level is raised 3' up from Cafeteria floor					
Walls	A-22-1	Plaster - Stage Office (East)	Concrete	ND	
Walls	A-22-2	Plaster	Concrete	ND	
Cove Base		None			
Lights		Not Fluorescent Lighting			

Building: Building B			Room Name/No: Room 5		
Room Dimensions (ft.): L: 31' 6" W: 29' H: 11'			Total Room Ft ² : 914		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	B-1-1	Blue Carpet Tiles & Adhesive (Green) - 95% of area	Concrete	ND	
Flooring		Black Carpet Tiles & Adhesive (Green) At Door Entrance) - 5% of Area	Concrete		
		Note: Per sample result B-1-1		ND	
Walls	B-5-1	Particle Board with Wallpapered Face Glued to Plywood	Plywood	ND	
		Assumed Note: Adhesive Assumed; Unable to sample without causing considerable damage		ACM	N
Walls		White Board - On East Wall		NS	
		Assumed Note: Adhesive Assumed; Unable to sample without causing considerable damage		ACM	N
Cove Base	B-2-1	4" Black Cove Base & Adhesive (Beige)		ND	
Ceiling	B-3-1	2' x 4' Ceiling Tile (Drop-down)		ND	
Ceiling	B-4-1	1' x 1' Ceiling Tile (Nailed/Screwed) Note: One 1' x 1' Row Visible; Remainder is above 2' x 4' CT		ND	
		Note: Per sample result B-4-2			
Above Ceiling		Fiberglass Batt Insulation; Electrical Conduit & Wiring			
2nd Ceiling	B-4-1	1' x 1' Ceiling Tile (Nailed/Screwed)		ND	
Attic		Above 1' x 1' is more Fiberglass Insulation, Exposed Framing & Electrical Conduit & Wiring		NS	
Lights		48 Light Tubes / 12 Fixtures; Note: Unable to disassemble fixtures to confirm number of Ballasts & PCBs			

Building: Building B			Room Name/No: Classroom 6		
Room Dimensions (ft.): L: 31' 6" W: 29' H: 11'			Total Room Ft ² : 914		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Blue Carpet Tiles & Adhesive (Green) - 95% of area Note: Residual Black Mastic under Blue Carpet Tiles; Not enough to sample Note: Per sample result B-1-1	Concrete	ND	
Flooring		Black Carpet Tiles & Adhesive (Green) At Door Entrance - 5% of Area Note: Per sample result B-1-1	Concrete	ND	
Walls		Particle Board with Wallpapered Face Glued to Plywood, Note: Per sample results B-5-1 & B-5-2	Plywood	ND	
	Assumed	Note: Adhesive Assumed; Unable to sample without causing considerable damage		ACM	N
Walls		White Board (2 on East Wall)		NS	
	Assumed	Note: Adhesive Assumed; Unable to sample without causing considerable damage		ACM	N
Cove Base		4" Black Cove Base & Adhesive (Beige) Note: Per sample result B-2-1		ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Per sample result B-3-2		ND	
Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: One 1' x 1' Row Visible; Remainder is above 2' x 4' CT Note: Per sample result B-4-2		ND	
Above Ceiling		Fiberglass Batt Insulation; Electrical Conduit & Wiring			
2nd Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result B-4-2		ND	
Attic		Above 1' x 1' is more Fiberglass Insulation, Exposed Framing & Electrical Conduit & Wiring		NS	
Lights		48 Light Tubes / 12 Fixtures; Note: Unable to disassemble fixtures to confirm number of Ballasts & PCBs			

Building: Building B			Room Name/No: Classroom 7		
Room Dimensions (ft.): L: 31' 6" W: 29' H: 11'			Total Room Ft ² : 914		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	B-1-2	Blue Carpet Tiles & Adhesive (Green) - 95% of area	Concrete	ND	
Flooring		Black Carpet Tiles & Adhesive (Green) At Door Entrance - 5% of Area Note: Per sample result B-1-1	Concrete	ND	
Walls		Particle Board with Wallpapered Face Glued to Plywood Note: Per sample results B-5-1 & B-5-2	Plywood	ND	
	Assumed	Note: Adhesive Assumed; Unable to sample without causing considerable damage		ACM	N
Walls		White Board (2 on East Wall)		NS	
	Assumed	Note: Adhesive Assumed; Unable to sample without causing considerable damage		ACM	N
Cove Base	B-2-2	4" Black Cove Base & Adhesive (Beige)		ND	
Ceiling	B-3-2	2' x 4' Ceiling Tile (Drop-down)		ND	
Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: One 1' x 1' Row Visible; Remainder is above 2' x 4' CT Note: Per sample result B-4-2		ND	
Above Ceiling		Fiberglass Batt Insulation; Electrical Conduit & Wiring		NS	
2nd Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result B-4-2		ND	
Attic		Above 1' x 1' is more Fiberglass Insulation, Exposed Framing & Electrical Conduit & Wiring		NS	
Lights		48 Light Tubes / 12 Fixtures; Note: Unable to disassemble fixtures to confirm number of Ballasts & PCBs			

Building: Building B			Room Name/No: Classroom 8		
Room Dimensions (ft.): L: 31' 6" W: 29' H: 11'			Total Room Ft ² : 914		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Blue Carpet Tiles & Adhesive (Green) - 95% of area Note: Per sample result B-1-1 Note: Residual Black Mastic under Blue Carpet Tiles; Not enough to sample	Concrete	ND	
Flooring		Black Carpet Tiles & Adhesive (Green) At Door Entrance - 5% of Area Note: Per sample result B-1-1	Concrete	ND	
Walls		Particle Board with Wallpapered Face Glued to Plywood Note: Per sample results B-5-1 & B-5-2	Plywood	ND	
	Assumed	Note: Adhesive Assumed; Unable to sample without causing considerable damage		ACM	N
Walls		White Board (2 on East Wall)		NS	
	Assumed	Note: Adhesive Assumed; Unable to sample without causing considerable damage		ACM	N
Cove Base		4" Black Cove Base & Adhesive (Beige) Note: Per sample result B-2-1		ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Per sample result B-3-1		ND	
Ceiling	B-4-2	1' x 1' Ceiling Tile (Nailed/Screwed) Note: One 1' x 1' Row Visible; Remainder is above 2' x 4' CT		ND	
Above Ceiling	B-8-1	Fiberglass Batt Insulation; Electrical Conduit & Wiring		ND	
2nd Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result B-4-2		ND	
Attic		Above 1' x 1' is more Fiberglass Insulation, Exposed Framing & Electrical Conduit & Wiring		NS	
Lights		48 Light Tubes / 12 Fixtures; Note: Unable to disassemble fixtures to confirm number of Ballasts & PCBs			

Building: Building B			Room Name/No: Classroom 9		
Room Dimensions (ft.): L: 31' 6" W: 29' H: 11'			Total Room Ft ² : 914		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Blue Carpet Tiles & Adhesive (Green) - 95% of area Note: Per sample result B-1-2	Concrete	ND	
Flooring		Black Carpet Tiles & Adhesive (Green) At Door Entrance - 5% of Area Note: Per sample result B-1-2	Concrete	ND	
Walls	B-5-2	Particle Board with Wallpapered Face Glued to Plywood	Plywood	ND	
	Assumed	Note: Adhesive Assumed; Unable to sample without causing considerable damage		ACM	N
Walls		White Board (2 on East Wall)		NS	
	Assumed	Note: Adhesive Assumed; Unable to sample without causing considerable damage		ACM	N
Cove Base		4" Black Cove Base & Adhesive (Beige) Note: Per sample result B-2-2		ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Per sample result B-3-2		ND	
Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: One 1' x 1' Row Visible; Remainder is above 2' x 4' CT Note: Per sample result B-4-1		ND	
Above Ceiling		Fiberglass Batt Insulation; Electrical Conduit & Wiring		NS	
2nd Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result B-4-1		ND	
Attic		Above 1' x 1' is more Fiberglass Insulation, Exposed Framing & Electrical Conduit & Wiring		NS	
Lights		48 Light Tubes / 12 Fixtures; Note: Unable to disassemble fixtures to confirm number of Ballasts & PCBs			

Building: Building B			Room Name/No: Classroom 10		
Room Dimensions (ft.): L: 31' 6" W: 29' H: 11'			Total Room Ft ² : 914		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Blue Carpet Tiles & Adhesive (Green) - 95% of area Note: Per sample result B-1-1 Note: Residual Black Mastic under Blue Carpet Tiles; Not enough to sample	Concrete	ND	
Flooring		Black Carpet Tiles & Adhesive (Green) At Door Entrance - 5% of Area Note: Per sample result B-1-1	Concrete	ND	
Walls		Particle Board with Wallpapered Face Glued to Plywood Note: Particle Board Adhesive Assumed Positive for Asbestos	Plywood	ND	
	Assumed			ACM	N
Walls		White Board (2 on East Wall) Note: Adhesive Assumed; Unable to sample without causing considerable damage		NS	
	Assumed			ACM	N
Cove Base		4" Black Cove Base & Adhesive (Beige) Note: Per sample result B-2-1		ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Per sample result B-3-1		ND	
Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: One 1' x 1' Row Visible; Remainder is above 2' x 4' CT Note: Per sample result B-4-2		ND	
Above Ceiling		Fiberglass Batt Insulation; Electrical Conduit & Wiring		NS	
2nd Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result B-4-2		ND	
Attic		Above 1' x 1' is more Fiberglass Insulation, Exposed Framing & Electrical Conduit & Wiring		NS	
Lights		48 Light Tubes / 12 Fixtures; Note: Unable to disassemble fixtures to confirm number of Ballasts & PCBs			

Building: Building C			Room Name/No: Classroom 13		
Room Dimensions (ft.): L: 31' 6" W: 29' H: 11'			Total Room Ft ² : 914		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Blue Carpet Tiles & Adhesive (Green) - 95% of area Note: Per sample result B-1-2	Concrete	ND	
	C-1-1	Note: Residual Black Mastic under Blue Carpet Tiles; Sampled (Negative for Asbestos)		ND	
Flooring		Black Carpet Tiles & Adhesive (Green) At Door Entrance - 5% of Area	Concrete	ND	
		Note: Per sample result B-1-2			
Walls	C-5-1	Particle Board with Wallpapered Face Glued to Plywood	Plywood	ND	
	Assumed	Note: Adhesive Assumed; Unable to sample without causing considerable damage		ACM	N
Walls		White Board (2 on East Wall)		NS	
	Assumed	Note: Adhesive Assumed; Unable to sample without causing considerable damage		ACM	N
Cove Base	C-6-1	4" Black Cove Base & Adhesive (Beige)		ND	
Ceiling	C-3-1	2' x 4' Ceiling Tile (Drop-down)		ND	
Ceiling	C-4-1	1' x 1' Ceiling Tile (Nailed/Screwed) Note: One 1' x 1' Row Visible; Remainder is above 2' x 4' CT		ND	
Above Ceiling		Fiberglass Batt Insulation; Electrical Conduit & Wiring		NS	
2nd Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result C-4-1		ND	
Attic	C-8-1	Above 1' x 1' is more Fiberglass Insulation, Exposed Framing & Electrical Conduit & Wiring		ND	
Lights		48 Light Tubes / 12 Fixtures; Note: Unable to disassemble fixtures to confirm number of Ballasts & PCBs			

Building: Building C			Room Name/No: Classroom 14		
Room Dimensions (ft.): L: 31' 6" W: 29' H: 11'			Total Room Ft ² : 914		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Blue Carpet Tiles & Adhesive (Green) - 95% of area Note: Per sample result B-1-2	Concrete	ND	
		Note: Residual Black Mastic under Blue Carpet Tiles; Per sample result C-1-1		ND	
Flooring		Black Carpet Tiles & Adhesive (Green) At Door Entrance - 5% of Area	Concrete	ND	
		Note: Per sample result B-1-2			
Walls		Particle Board with Wallpapered Face Glued to Plywood Note: Per sample result C-5-1	Plywood	ND	
	Assumed	Note: Adhesive Assumed; Unable to sample without causing considerable damage		ACM	N
Walls		White Board (2 on East Wall)		NS	
	Assumed	Note: Adhesive Assumed; Unable to sample without causing considerable damage		ACM	N
Cove Base		4" Black Cove Base & Adhesive (Beige) Note: Per sample result C-6-1		ND	
Ceiling	C-3-2	2' x 4' Ceiling Tile (Drop-down)		ND	
Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: One 1' x 1' Row Visible; Remainder is above 2' x 4' CT		ND	
		Note: Per sample result C-4-1			
Above Ceiling		Fiberglass Batt Insulation; Electrical Conduit & Wiring		NS	
2nd Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result C-4-1		ND	
Attic		Above 1' x 1' is more Fiberglass Insulation, Exposed Framing & Electrical Conduit & Wiring		NS	
Lights		48 Light Tubes / 12 Fixtures; Note: Unable to disassemble fixtures to confirm number of Ballasts & PCBs			

Building: Building C			Room Name/No: Classroom 15		
Room Dimensions (ft.): L: 31' 6" W: 29' H: 11'			Total Room Ft ² : 914		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	C-1-2	Blue Carpet Tiles & Adhesive (Green) - 95% of area Note: Per sample result B-1-2	Concrete	ND	
		Note: Residual Black Mastic under Blue Carpet Tiles;		ND	
Flooring		Black Carpet Tiles & Adhesive (Green) At Door Entrance - 5% of Area	Concrete	ND	
		Note: Per sample result B-1-2			
Walls	Assumed	Particle Board with Wallpapered Face Glued to Plywood Note: Per sample result C-5-1	Plywood	ND	N
		Note: Adhesive Assumed; Unable to sample without causing considerable damage		ACM	
Walls	Assumed	White Board (2 on East Wall)		NS	N
		Note: Adhesive Assumed; Unable to sample without causing considerable damage		ACM	
Cove Base		4" Black Cove Base & Adhesive (Beige) Note: Per sample result C-6-1		ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Per sample result C-3-1		ND	
Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: One 1' x 1' Row Visible; Remainder is above 2' x 4' CT		ND	
		Note: Per sample result C-4-1			
Above Ceiling		Fiberglass Batt Insulation; Electrical Conduit & Wiring		NS	
2nd Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result C-4-1		ND	
Attic		Above 1' x 1' is more Fiberglass Insulation, Exposed Framing & Electrical Conduit & Wiring		NS	
Lights		48 Light Tubes / 12 Fixtures; Note: Unable to disassemble fixtures to confirm number of Ballasts & PCBs			

Building: Building C			Room Name/No: Staff Room		
Room Dimensions (ft.): L: 15' 6" W: 29' H: 11' 0"			Total Room Ft ² : 450		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Blue Carpet Tiles & Adhesive (Green) - 95% of area Note: Per sample result B-1-2 Note: Residual Black Mastic under Blue Carpet Tiles; Per sample result C-1-1	Concrete	ND	
Flooring		Black Carpet Tiles & Adhesive (Green) At Door Entrance - 5% of Area Note: Per sample result B-1-2	Concrete	ND	
Walls		Painted Plywood - All Walls	Wood	NS	
Walls		White Board (1 on West Wall)		NS	
	Assumed	Note: Adhesive Assumed; Unable to sample without causing considerable damage		ACM	N
Cove Base		4" Black Cove Base & Adhesive (Beige) Note: Per sample result C-6-1		ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Per sample result C-3-1		ND	
Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: One 1' x 1' Row Visible; Remainder is above 2' x 4' CT Note: Per sample result C-4-1		ND	
Above Ceiling		Fiberglass Batt Insulation; Electrical Conduit & Wiring		NS	
2nd Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result C-4-1		ND	
Attic		Above 1' x 1' is more Fiberglass Insulation, Exposed Framing & Electrical Conduit & Wiring		NS	
Lights		10 Light Tubes / 5 Fixtures; Note: Unable to disassemble fixtures to confirm number of Ballasts & PCBs			

Building: Building C			Room Name/No: Staff Restroom		
Room Dimensions (ft.): L: 11' W: 8' H: 11'			Total Room Ft ² : 88		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	C-9-1	Gray Vinyl Sheet Flooring & Mastic	Concrete	ND	
Walls	C-11-1 & C-11-2	Drywall & Taping Mud (Painted)		ND	
Walls	C-10-1	Fiberglass Reinforced Panels & Adhesive - From Floor up to 4"	Drywall	ND	
Cove Base		Gray Vinyl Sheet Flooring & Adhesive curves up wall Note: Per sample result C-9-1		ND	
Ceiling		Drywall & Taping Mud (Painted) Note: Per sample result C-11-1		ND	
Lights		2 Light Tubes / 1 Fixture			

Building: Building C			Room Name/No: Storage		
Room Dimensions (ft.): L: 9' W: 5' H: 11'			Total Room Ft ² : 45		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Blue Carpet Tiles	Concrete	NS	
		Note: Residual Black Mastic under Blue Carpet Tiles; Per sample result C-1-1		ND	
Walls	C-12-1 & C-12-2	Plaster (Painted)		ND	
Cove Base		None			
Ceiling		Plaster (Painted) Note: Per sample result C-12-1		ND	
Lights		1 Light Tubes / 1 Fixture			

Building: Building C			Room Name/No: Classroom 16		
Room Dimensions (ft.): L: 31' 6" W: 29' H: 11'			Total Room Ft ² : 914		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Blue Carpet Tiles & Adhesive (Green) - 95% of area Note: Per sample result B-1-2 Note: Residual Black Mastic under Blue Carpet Tiles; Per sample result C-1-1	Concrete	ND	
Flooring		Black Carpet Tiles & Adhesive (Green) At Door Entrance - 5% of Area Note: Per sample result B-1-2	Concrete		
Walls	C-5-2	Particle Board with Wallpapered Face Glued to Plywood Assumed Note: Adhesive Assumed; Unable to sample without causing considerable damage	Plywood	ND	
Walls		White Board (2 on East Wall) Assumed Note: Adhesive Assumed; Unable to sample without causing considerable damage		NS	
Cove Base	C-6-2	4" Black Cove Base & Adhesive (Beige)		ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Per sample result C-3-1		ND	
Ceiling	C-4-2	1' x 1' Ceiling Tile (Nailed/Screwed) Note: One 1' x 1' Row Visible; Remainder is above 2' x 4' CT		ND	
Above Ceiling		Fiberglass Batt Insulation; Electrical Conduit & Wiring		NS	
2nd Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result C-4-2		ND	
Attic		Above 1' x 1' is more Fiberglass Insulation, Exposed Framing & Electrical Conduit & Wiring		NS	
Lights		48 Light Tubes / 12 Fixtures; Note: Unable to disassemble fixtures to confirm number of Ballasts & PCBs			

Building: Building C			Room Name/No: Classroom 17		
Room Dimensions (ft.): L: 31' 6" W: 29' H: 11'			Total Room Ft ² : 914		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Blue Carpet Tiles & Adhesive (Green) - 95% of area Note: Per sample result B-1-2 Note: Residual Black Mastic under Blue Carpet Tiles; Per sample result C-1-1	Concrete	ND ND	
Flooring		Black Carpet Tiles & Adhesive (Green) At Door Entrance - 5% of Area Note: Per sample result B-1-2	Concrete	ND	
Walls		Particle Board with Wallpapered Face Glued to Plywood Note: Per sample result C-5-2 Assumed Note: Adhesive Assumed; Unable to sample without causing considerable damage	Plywood	ND ACM	 N
Walls		White Board (2 on East Wall) Assumed Note: Adhesive Assumed; Unable to sample without causing considerable damage		NS AMC	 N
Cove Base		4" Black Cove Base & Adhesive (Beige) Note: Per sample result C-6-2		ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Per sample result C-3-1		ND	
Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: One 1' x 1' Row Visible; Remainder is above 2' x 4' CT Note: Per sample result C-4-2		ND	
Above Ceiling		Fiberglass Batt Insulation; Electrical Conduit & Wiring		NS	
2nd Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result C-4-2		ND	
Attic		Above 1' x 1' is more Fiberglass Insulation, Exposed Framing & Electrical Conduit & Wiring		NS	
Lights		48 Light Tubes / 12 Fixtures; Note: Unable to disassemble fixtures to confirm number of Ballasts & PCBs			

Building: Building C			Room Name/No: Girls' Restroom		
Room Dimensions (ft.): L: 15' 6" W: 13' 6" H: 12' 6"			Total Room Ft ² : 209		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Tan Ceramic Tile & Mortar	Concrete	NS	
Walls	C-12-3	Plaster (Painted)		ND	
Walls		Tan Ceramic Tile & Mortar Note: Ceramic Tile, from floor up, covers 40% of Wall space	Plaster	NS	
Cove Base		None			
Ceiling		Plaster (Painted) Note: Per sample result C-12-3		ND	
Lights		2 Ballasts / 4 Light Tubes / 2 Fixtures			

Building: Building C			Room Name/No: Boys' Restroom		
Room Dimensions (ft.): L: 15' 6" W: 14' 6" H: 12' 6"			Total Room Ft ² : 225		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Tan Ceramic Tile & Mortar	Concrete	NS	
Walls	C-12-4	Plaster (Painted)		ND	
Walls		Tan Ceramic Tile & Mortar Note: Ceramic Tile, from floor up, covers 40% of Wall space	Plaster	NS	
Cove Base		None			
Ceiling		Plaster (Painted) Note: Per sample result C-12-3		ND	
Lights		2 Ballasts / 4 Light Tubes / 2 Fixtures			

Building: Building D			Room Name/No: 18		
Room Dimensions (ft.): L: 31' 6" W: 29' H: 11'			Total Room Ft ² : 914		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	D-2-1	Greenish Carpet Tiles & Adhesive (Green) - 95% of area	Concrete	ND	
Flooring		Black Carpet Tiles & Adhesive; At Door Entrance - 5% of Area Note: Per sample result D-2-2	Concrete	ND	
Walls	D-1-1, D-1-2, & D-1-3	Plaster (Painted)		ND	
Walls	Assumed	Tackboard & Adhesive - On West Wall Note: Unable to sample without causing considerable damage	Plaster	ACM	N
Walls		White Board - 2 on South Wall	Plaster	NS	
	Assumed	Adhesive Assumed; Note: Unable to sample without causing considerable damage		ACM	N
Cove Base	D-3-1	4" Gray Cove Base & Adhesive (White)		ND	
Ceiling	D-4-1	2' x 4' Ceiling Tile (Drop-down)		ND	
Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: One 1' x 1' Row Visible; Remainder is above 2' x 4' CT Note: Per sample result D-5-1		ND	
Above Ceiling		Fiberglass Batt Insulation; Electrical Conduit & Wiring			
2nd Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result D-5-1		ND	
Attic		Above 1' x 1' is more Fiberglass Insulation, Exposed Framing & Electrical Conduit & Wiring		NS	
Lights		12 Ballasts / 48 Light Tubes / 12 Fixtures;			

Building: Building D			Room Name/No: 19		
Room Dimensions (ft.): L: 31' 6" W: 29' H: 11'			Total Room Ft ² : 914		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	D-2-2	Greenish Carpet & Adhesive (Yellow) - 95% of area	Concrete	ND	
Flooring		Black Carpet & Adhesive; At Door Entrance - 5% of Area Note: Per sample result D-2-2	Concrete	ND	
Walls		Wood (Painted)			
Walls		White Board - 2 on East Wall, 1 on South Wall	Wood		
	Assumed	Adhesive Assumed; Note: Unable to sample without causing considerable damage		ACM	N
Walls	Assumed	Soft Soak Wall Panel & Adhesive	Wood	ACM	N
		Note: Unable to sample without causing considerable damage			
Cove Base	D-3-2	4" Green Cove Base & Adhesive (Beige)		ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Per sample result D-4-1		ND	
Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: One 1' x 1' Row Visible; Remainder is above 2' x 4' CT		ND	
		Note: Per sample result D-5-1			
Above Ceiling		Fiberglass Batt Insulation; Electrical Conduit & Wiring		NS	
2nd Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result D-5-1		ND	
Attic		Above 1' x 1' is more Fiberglass Insulation, Exposed Framing & Electrical Conduit & Wiring		NS	
Lights		12 Ballasts / 48 Light Tubes / 12 Fixtures;			

Building: Building D			Room Name/No: 20		
Room Dimensions (ft.): L: 31' 6" W: 29' H: 11'			Total Room Ft ² : 914		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Greenish Carpet & Adhesive (Yellow)- 95% of area Note: Per sample result D-2-1	Concrete	ND	
Flooring		Black Carpet & Adhesive; At Door Entrance - 5% of Area Note: Per sample result D-2-2	Concrete	ND	
Walls		Wood (Painted)		NS	
Walls		White Board - 2 on East Wall, 1 on South Wall	Wood	NS	
	Assumed	Adhesive Assumed; Note: Unable to sample without causing considerable damage		ACM	N
Walls	Assumed	Soft Soak Wall Panel & Adhesive	Wood	ACM	N
		Note: Unable to sample without causing considerable damage			
Cove Base		4" Green Cove Base & Adhesive (Beige) Note: Per sample result D-3-2		ND	
Ceiling	D-4-2	2' x 4' Ceiling Tile (Drop-down)		ND	
Ceiling	D-5-1	1' x 1' Ceiling Tile (Nailed/Screwed) Note: One 1' x 1' Row Visible; Remainder is above 2' x 4' CT		ND	
Above Ceiling		Fiberglass Batt Insulation; Electrical Conduit & Wiring		NS	
2nd Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result D-5-1		ND	
Attic		Above 1' x 1' is more Fiberglass Insulation, Exposed Framing & Electrical Conduit & Wiring		NS	
Lights		12 Ballasts / 48 Light Tubes / 12 Fixtures;			

Building: Building D			Room Name/No: 21		
Room Dimensions (ft.): L: 31' 6" W: 29' H: 11'			Total Room Ft ² : 914		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Greenish Carpet & Adhesive (Yellow) - 95% of area Note: Per sample result D-2-1	Concrete	ND	
Flooring		Black Carpet & Adhesive; At Door Entrance - 5% of Area Note: Per sample result D-2-2	Concrete	ND	
Walls		Wood (Painted)		NS	
Walls		White Board - 2 on East Wall, 1 on South Wall	Wood		
	Assumed	Adhesive Assumed; Note: Unable to sample without causing considerable damage		ACM	N
Walls	Assumed	Soft Soak Wall Panel & Adhesive	Wood	ACM	N
		Note: Unable to sample without causing considerable damage			
Cove Base		4" Green Cove Base & Adhesive (Beige) Note: Per sample result D-3-2	Wood	ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Per sample result D-4-2		ND	
Ceiling	D-5-2	1' x 1' Ceiling Tile (Nailed/Screwed) Note: One 1' x 1' Row Visible; Remainder is above 2' x 4' CT		ND	
Above Ceiling		Fiberglass Batt Insulation; Electrical Conduit & Wiring		NS	
2nd Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result D-5-2		ND	
Attic		Above 1' x 1' is more Fiberglass Insulation, Exposed Framing & Electrical Conduit & Wiring		NS	
Lights		12 Ballasts / 48 Light Tubes / 12 Fixtures;			

Building: Building D			Room Name/No: 22		
Room Dimensions (ft.): L: 31' 6" W: 29' H: 11'			Total Room Ft ² : 914		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Greenish Carpet & Adhesive (Yellow) - 95% of area Note: Per sample result D-2-1	Concrete	ND	
Flooring		Black Carpet & Adhesive; At Door Entrance - 5% of Area Note: Per sample result D-2-2	Concrete	ND	
Walls		Wood (Painted)		NS	
Walls		White Board - 2 on East Wall, 1 on South Wall	Wood	NS	
	Assumed	Adhesive Assumed; Note: Unable to sample without causing considerable damage		ACM	N
Walls	Assumed	Soft Soak Wall Panel & Adhesive	Wood	ACM	N
		Note: Unable to sample without causing considerable damage			
Cove Base		4" Green Cove Base & Adhesive (Beige) Note: Per sample result D-3-2		ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Per sample result D-4-2		ND	
Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: One 1' x 1' Row Visible; Remainder is above 2' x 4' CT		ND	
		Note: Per sample result D-5-2			
Above Ceiling		Fiberglass Batt Insulation; Electrical Conduit & Wiring		NS	
2nd Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result D-5-2		ND	
Attic		Above 1' x 1' is more Fiberglass Insulation, Exposed Framing & Electrical Conduit & Wiring		NS	
Lights		12 Ballasts / 48 Light Tubes / 12 Fixtures;			

Building: Building D			Room Name/No: Staff Restroom		
Room Dimensions (ft.): L: 7' W: 10' H: 10' 0"			Total Room Ft ² : 70		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	D-10-1	Gray Vinyl Sheet Flooring & Adhesive	Concrete	ND	
Walls		Plaster (Painted) Note: Per sample result D-1-1		ND	
Walls	D-9-1	Fiberglass Reinforced Panels & Adhesive - From Floor up to 4"		ND	
Cove Base		Gray Vinyl Sheet Flooring & Adhesive curves 6" up wall Note: Per sample result D-10-1		ND	
Ceiling		Plaster (Painted) Note: Per sample result D-1-1		ND	
Lights		1 Ballast / 2 Light Tubes / 1 Fixture			

Building: Building D			Room Name/No: Custodian		
Room Dimensions (ft.): L: 15' 6" W: 21' H: 10' 0"			Total Room Ft ² : 326		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Concrete		Outside Scope	
Walls	D-8-1	Plaster (Painted)		ND	
Walls		White Board - 1 White Board	Plaster	NS	
	Assumed	Adhesive Assumed; Note: Unable to sample without causing considerable damage		ACM	N
Walls	Assumed	Tackboard & Adhesive - 2 Tackboards;	Plaster	ACM	N
		Note: Unable to sample without causing considerable damage			
Cove Base		None			
Ceiling		Plaster (Painted) Note: Per sample result D-8-1		ND	
Lights		3 Ballasts / 6 Light Tubes / 3 Fixtures			

Building: Building D			Room Name/No: Girls' Restroom		
Room Dimensions (ft.): L: 15' 6" W: 14' 3" H: 12'			Total Room Ft ² : 221		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Tan Ceramic Tile & Mortar	Concrete	NS	
Walls	D-8-2	Plaster (Painted)		ND	
Walls		Tan Ceramic Tile & Mortar Note: Ceramic Tile, from floor up, covers 40% of Wall space	Plaster	NS	
Cove Base		None			
Ceiling		Plaster (Painted) Note: Per sample result D-8-2		ND	
Lights		1 Ballasts / 2 Light Tubes / 1 Fixtures			

Building: Building D			Room Name/No: Boys' Restroom		
Room Dimensions (ft.): L: 15' 6" W: 14' H: 12'			Total Room Ft ² : 225		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Tan Ceramic Tile & Mortar	Concrete	NS	
Walls		Plaster (Painted) Note: Per sample result D-8-1		ND	
Walls		Tan Ceramic Tile & Mortar Note: Ceramic Tile, from floor up, covers 40% of Wall space	Plaster	NS	
Cove Base		None			
Ceiling		Plaster (Painted) Note: Per sample result D-8-1		ND	
Lights		2 Ballasts / 4 Light Tubes / 2 Fixtures			

Building: Building D					
Room Dimensions (ft.): L: 15' 6" W: 7' 6" H: 12'			Room Name/No: Ball Room		
Total Room Ft ² : 116					
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Concrete (Unfinished)	Concrete	Outside Scope	
Walls		Wood (Unfinished)		NS	
Walls		Tan Ceramic Tile & Mortar Note: Ceramic Tile, from floor up, covers 40% of Wall space	Plaster	NS	
Cove Base		None			
Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result D-5-1		ND	
Above Ceiling		Fiberglass Batt Insulation		NS	
Lights		2 Ballasts / 4 Light Tubes / 2 Fixtures			

Building: Building E					
Room Dimensions (ft.): L: 7' 6" W: 7' H: 9' 6"			Room Name/No: Storage Room 1		
Total Room Ft ² : 53					
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Concrete		Outside Scope	
Walls	E-1-1	Plaster (Painted)		ND	
Cove Base	E-1-2	None		ND	
Ceiling		Plaster (Unfinished) Note: Per sample result E-1-1		ND	
Lights		1 Light Tube / 1 Fixtures			

Building: Building E					
Room Dimensions (ft.): L: 7' 6" W: 7' H: 9' 6"			Room Name/No: Storage Room 2		
Total Room Ft ² : 53					
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
No information					

Building: Building E			Room Name/No: 11 - Kindergarten		
Room Dimensions (ft.): L: 41' 6" W: 29' H: 11' 0"			Total Room Ft ² : 1,204		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	E-3-1	24"x24" Gray Vinyl Floor Tile & Adhesive - 60% of floor area	Concrete	ND	
Flooring		Blue Carpet Tiles & Adhesive (Green) - 38% of floor area Note: Per sample result B-1-2	Concrete	ND	
Flooring		Black Carpet Tiles & Adhesive; At Door Entrance - 2% of Area Note: Per sample result B-1-2	Concrete	ND	
Walls	Assumed	Particle Board & Adhesive with Wallpapered Face Glued to Plywood Note: Unable to sample without causing considerable damage	Plywood	ACM	N
Walls		Partial Exposed Painted Wood (West Wall)		NS	
Walls		White Board - 2 White Boards on East Wall Assumed Adhesive Assumed; Note: Unable to sample without causing considerable damage	Plaster	ACM	N
Cove Base	E-2-1	4" Black Cove Base & Adhesive (Beige)		ND	
Ceiling	E-4-1	2' x 4' Ceiling Tile (Drop-down)		ND	
Ceiling	E-5-1	1' x 1' Ceiling Tile (Nailed/Screwed) Note: One 1' x 1' Row Visible; Remainder is above 2' x 4' CT		ND	
Above Ceiling		Fiberglass Batt Insulation & Exposed Framing		NS	
2nd Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result E-5-1		ND	
Attic		Above 1' x 1' is more Fiberglass Insulation		NS	
Lights		60 Light Tubes / 15 Fixtures; Note: Unable to disassemble fixtures to confirm number of Ballasts & PCBs			

Building: Building E			Room Name/No: Room 11 Boy's & Girl's Restrooms		
Room Dimensions (ft.): L: 8' W: 13' 6" H: 8'			Total Room Ft ² : 108		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Off-White & Brown Ceramic Tile & Mortar	Concrete	NS	
Walls		Wood (Painted)		NS	
Walls		Off-White Ceramic Tile & Mortar Note: Ceramic Tile goes 5' 3" up from floor up	Wood	NS	
Cove Base		None			
Ceiling		Wood (Painted)		NS	
Lights		2 Light Tubes / 1 Fixture			

Building: Building E			Room Name/No: Teacher's Room		
Room Dimensions (ft.): L: 15' 6" W: 9' H: 11'			Total Room Ft ² : 140		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		24"x24" Gray Vinyl Floor Tile & Adhesive Note: Per sample result E-3-1		ND	
Walls		Wood		NS	
Cove Base		4" Black Cove Base & Adhesive (Beige) Note: Per sample result E-2-1		ND	
Ceilings		1' x 1' Ceiling Tile (Nailed/Screwed) - Peg Holes Note: Per sample result E-5-1		ND	
Above Ceiling		Fiberglass Batt Insulation & Exposed Framing		NS	
Attic		Fiberglass Insulation		NS	
Lights		2 Ballasts / 4 Light Tubes / 2 Fixtures			

Building: Building E			Room Name/No: Teacher's Restroom		
Room Dimensions (ft.): L: 7' 6" W: 5' H: 10'			Total Room Ft ² : 38		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Brown Ceramic Tile & Mortar		NS	
Walls	E-6-1	Plaster (Painted)		ND	
Walls		Off-White Ceramic Tile & Mortar Note: Ceramic Tile goes 5' up from floor up		NS	
Cove Base		None			
Ceilings		Plaster (Painted) Note: Per sample result E-6-1		ND	
Lights		1 Ballast			

Building: Building E			Room Name/No: 12 - Kindergarten		
Room Dimensions (ft.): L: 41' 6" W: 29' H: 11' 0"			Total Room Ft ² : 1,204		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	E-3-2	24"x24" Gray Vinyl Floor Tile & Adhesive - 60% of floor area	Concrete	ND	
Flooring		Blue Carpet Tiles & Adhesive (Green) - 38% of floor area Note: Per sample result B-1-2	Concrete	ND	
Flooring		Black Carpet Tiles & Adhesive; At Door Entrance - 2% of Area Note: Per sample result B-1-2	Concrete	ND	
Walls	Assumed	Particle Board & Adhesive with Wallpapered Face Glued to Plywood Note: Unable to sample without causing considerable damage	Plywood	ACM	N
Walls	Assumed	White Board - 2 White Boards on East Wall Adhesive Assumed; Note: Unable to sample without causing considerable damage	Plaster	ACM	N
Cove Base	E-2-2	4" Black Cove Base & Adhesive (Beige)		ND	
Ceiling	E-4-2	2' x 4' Ceiling Tile (Drop-down)		ND	
Ceiling	E-5-2	1' x 1' Ceiling Tile (Nailed/Screwed) Note: One 1' x 1' Row Visible; Remainder is above 2' x 4' CT		ND	
Above Ceiling		Fiberglass Batt Insulation & Exposed Framing		NS	
2nd Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result E-5-2		ND	
Attic	E-9-1	Above 1' x 1' is more Fiberglass Insulation		ND	
Lights		60 Light Tubes / 15 Fixtures; Note: Unable to disassemble fixtures to confirm number of Ballasts & PCBs			

Building: Building E			Room Name/No: Room 12 Boy's & Girl's Restrooms		
Room Dimensions (ft.): L: 8' W: 13' 6" H: 8'			Total Room Ft ² : 108		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Off-White & Brown Ceramic Tile & Mortar	Concrete	NS	
Walls	E-6-2	Plaster (Painted) in Sink Area		ND	
Walls		Wood (Painted)	Wood	NS	
Walls		Off-White Ceramic Tile & Mortar Note: Off-White Ceramic Tile goes 5' 3" up from floor up	Wood	NS	
Cove Base		None			
Ceiling		Plaster (Painted) Note: Per sample result E-6-2		ND	
Lights		2 Light Tubes / 1 Fixture			

Building: R1			Room Name/No: 36 (Portable Building)		
Room Dimensions (ft.): L: 39' 6" W: 23' H: 8' 6"			Total Room Ft ² : 909		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	R1-2-1	Multi-Colored Brown/Tan Carpet Tiles & Adhesive	Wood	ND	
Walls	R1-5-1	Drywall (Unfinished)		ND	
Walls		White Board - 2 White Boards on South Wall Assumed Adhesive on White Board; Note: Unable to sample without causing considerable damage	Drywall	ACM	N
Walls	R1-4-1	Soft Soak Wall Panels	Drywall	ND	
	R1-5-1	Adhesive on Soft Soak Panel			
Cove Base	R1-3-1	4" Brown Cove Base & Adhesive (Beige)		ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) - Fiberglass		NS	
Above Ceiling		Fiberglass Batt Insulation above Drop-down ceiling tile are secured to above Exposed Framing		NS	
Lights		16 Ballasts / 32 Light Tubes / 8 Fixtures			

Building: R1			Room Name/No: Room 36 Restroom		
Room Dimensions (ft.): L: 9' 6" W: 6' 6" H: 8' 6"			Total Room Ft ² :		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	R1-1-1	Off-White Speckled Vinyl Sheet Flooring & Adhesive	Wood	ND	
Walls	R1-5-1	Drywall (Unfinished)		ND	
Walls		Fiberglass Reinforced Panels; Note: 3' up Wall from floor	Drywall	NS	
	Assumed	Adhesive Assumed Note: Unable to sample without causing considerable damage		ACM	N
Walls	R1-4-1	Soft Soak Wall Panels, glued to Unfinished Drywall	Drywall	ND	
	R1-5-1	Adhesive on Soft Soak Panel		ND	
Cove Base	R1-1-1	Off-White Speckled Vinyl Sheet Flooring & Adhesive - Curves 6" up wall		ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) - Fiberglass		NS	
Above Ceiling		Fiberglass Batt Insulation above Drop-down ceiling tile are secured to above Exposed Framing		NS	
Lights		4 Ballasts / 8 Light Tubes / 2 Fixtures			

Building: R2			Room Name/No: 35 (Portable Building)		
Room Dimensions (ft.): L: 39' 6" W: 23' H: 8' 6"			Total Room Ft ² : 909		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	R2-1-1	Multi-Colored Brown/Tan Carpet Tiles & Adhesive	Wood	ND	
Walls	R2-2-1	Drywall (Unfinished)		ND	
Walls		White Board - 1 White Board on North Wall	Drywall		
	Assumed	Adhesive Assumed; Note: Unable to sample without causing considerable damage		ACM	N
Walls	R2-4-1	Soft Soak Wall Panels	Drywall	ND	N
	R2-2-1	Adhesive on Soft Soak Panel		ND	
Cove Base	R2-3-1	4" Brown Cove Base & Adhesive (Beige)		ND	
Ceiling	R2-5-1	2' x 4' Ceiling Tile (Drop-down) - Fiberglass		ND	
Above Ceiling		Fiberglass Batt Insulation above Drop-down ceiling tile are secured to above Exposed Framing		NS	
Lights		16 Ballasts / 32 Light Tubes / 8 Fixtures			

Building: R2			Room Name/No: Room 35 Restroom		
Room Dimensions (ft.): L: 9' 6" W: 6' 6" H: 8' 6"			Total Room Ft ² :		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Off-White Speckled Vinyl Sheet Flooring & Adhesive Note: Per sample result R1-1-1	Wood	ND	
Walls		Drywall (Unfinished) Note: Per sample result R2-2-1		ND	
Walls		Fiberglass Reinforced Panels; Note: 3' up Wall from floor			
		Assumed Adhesive on FRP Note: Unable to sample without causing considerable damage	Drywall	ACM	N
Walls	R2-4-1	Soft Soak Wall Panels			
	R2-2-1	Adhesive on Soft Soak Panel	Drywall	ND	
Cove Base		Off-White Speckled Vinyl Sheet Flooring & Adhesive - Curves 6" up wall Note: Per sample result R1-1-1	Drywall	ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) - Fiberglass		NS	
Above Ceiling		Fiberglass Batt Insulation above Drop-down ceiling tile are secured to above Exposed Framing		NS	
Lights		4 Ballasts / 8 Light Tubes / 2 Fixtures			

Building: R3					
Room Dimensions (ft.): L: 29' W: 19' H: 10'			Room Name/No: 29 - Main Room		
Total Room Ft ² : 290					
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	R3-5-1	Green Carpet & Mastic - 95% of Flooring	Wood	ND	
Flooring		Vinyl Sheet Flooring & Mastic (Beige) at Entrance - 5% of Flooring	Wood	ND	
		Note: Per sample result R3-4-1			
Walls		Wood (Painted)		NS	
Walls		White Board - 2 White Boards on East Wall	Wood	NS	
		Assumed Adhesive on White Board; Note: Unable to sample without causing considerable damage		ACM	N
Walls	R3-2-1	Soft Soak Wall Panels	Wood	ND	
		Assumed Adhesive on Soft Soak Note: Unable to sample without causing considerable damage		ACM	N
Cove Base	R3-1-1	4" Green Cove Base & Adhesive (Beige)		ND	
Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result R3-3-1		ND	
Lights		8 Ballasts / 16 Light Tubes / 4 Fixtures			

Building: R3					
Room Dimensions (ft.): L: 14' W: 11' 6" H: 10'			Room Name/No: 29 - Speech Room		
Total Room Ft ² : 161					
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Green Carpet & Adhesive Note: Per sample result R3-5-1		ND	
Walls		Wood		NS	
Walls		White Board - 1 White Board on East Wall	Wood		
		Assumed Adhesive on White Board; Note: Unable to sample without causing considerable damage		ACM	N
Walls		Soft Soak Wall Panels Note: Per sample result R3-2-1	Wood	ND	
		Assumed Adhesive on Soft Soak Note: Unable to sample without causing considerable damage		ACM	N
Cove Base		4" Green Cove Base & Adhesive (Beige) Note: Per sample result R3-1-1		ND	
Ceiling	R3-3-1	1' x 1' Ceiling Tile (Nailed/Screwed)		ND	
Lights		2 Ballasts / 4 Light Tubes / 1 Fixture			

Building: R3					
Room Dimensions (ft.): L: 14' 6" W: 11' 6" H: 10'			Room Name/No: 29 - Office		
Total Room Ft ² : 167					
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Green Carpet & Mastic - 95% of Flooring Note: Per sample result R3-5-1	Wood	ND	
Flooring	R3-4-1	Vinyl Sheet Flooring & Mastic (Beige) at Entrance - 5% of Flooring	Wood	ND	
Walls		Wood (Painted)		NS	
Walls		White Board - 1 White Board on South Wall	Wood	NS	
		Assumed Adhesive on White Board; Note: Unable to sample without causing considerable damage		ACM	N
Walls		Soft Soak Wall Panels Note: Per sample result R3-2-1	Wood	ND	
		Assumed Adhesive on Soft Soak Note: Unable to sample without causing considerable damage		ACM	N
Cove Base		4" Green Cove Base & Adhesive (Beige) Note: Per sample result R3-1-1		ND	
Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result R3-3-1		ND	
Lights		2 Ballasts / 4 Light Tubes / 1 Fixture			

Building: R4			Room Name/No: Room 28		
Room Dimensions (ft.): L: 39' 4" W: 23' 3" H: 9'			Total Room Ft ² : 914		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	R4-1-1	Multi-Colored Carpet & Mastic (Yellow) - 95% of Flooring	Wood	ND	
Flooring		Black Carpet & Adhesive at Entrance - 5% of Flooring Note: Per sample result R4-1-1	Wood	ND	
Walls		Wood (Painted)		NS	
Walls		White Boards - 2 on South Wall & 2 on East Wall	Wood	NS	
	Assumed	Adhesive on White Board; Note: Unable to sample without causing considerable damage		ACM	N
Walls	Assumed	Soft Soak & Adhesive	Wood	ACM	N
		Note: Unable to sample without causing considerable damage			
Cove Base	R4-4-1	4" Green Cove Base & Adhesive (Beige)		ND	
Ceiling	R4-2-1	2' x 4' Ceiling Tile (Drop-down)		ND	
Ceiling	R4-3-1	1' x 1' Ceiling Tile (Nailed/Screwed) Note: One 1' x 1' Row Visible; Remainder is above 2' x 4' CT		ND	
Above Ceiling		Fiberglass Batt Insulation & Exposed Framing		NS	
2nd Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result R4-3-1		ND	
Attic		Electrical Conduit & Wiring		NS	
Lights		14 Ballasts / 56 Light Tubes / 14 Fixtures			

Building: R5					
Room Dimensions (ft.): L: 31' 3" W: 29' 6" H: 10' 0"				Room Name/No: Room 25	
Total Room Ft ² : 922					
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	R5-3-1	Multi-Colored Carpet & Mastic - 95% of Flooring	Wood	ND	
Flooring	R5-4-1	Green Vinyl Sheet Flooring & Adhesive at Entrance - 5% of Flooring	Wood	ND	
Walls		Wood (Painted)		NS	
Walls		White Boards - 3 on South and East Walls	Wood	NS	
	Assumed	Adhesive Assumed; Note: Unable to sample without causing considerable damage		ACM	N
Walls	Assumed	Soft Soak & Adhesive	Wood	ACM	N
		Note: Unable to sample without causing considerable damage			
Cove Base	R5-2-1	4" Green Cove Base & Adhesive (Beige)		ND	
Ceiling	R5-1-1	1' x 1' Ceiling Tile (Nailed/Screwed)		ND	
Lights		36 Light Tubes / 9 Fixtures			

Building: R6					
Room Dimensions (ft.): L: 31' 3" W: 26' 6" H: 10' 0"				Room Name/No: Room 24	
Total Room Ft ² : 828					
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	R6-2-1	Multi-Colored Carpet & Mastic - 95% of Flooring	Wood	ND	
Flooring	R6-4-1	Green Vinyl Sheet Flooring & Adhesive at Entrance - 5% of Flooring	Wood	ND	
Walls		Wood (Painted)		ND	
Walls		White Boards - 3 on South and East Walls	Wood	NS	
	Assumed	Adhesive Assumed; Note: Unable to sample without causing considerable damage		ACM	N
Walls	Assumed	Soft Soak & Adhesive	Wood	ACM	N
		Note: Unable to sample without causing considerable damage			
Cove Base	R6-3-1	4" Green Cove Base & Adhesive (Beige)		ND	
Ceiling	R6-1-1	1' x 1' Ceiling Tile (Nailed/Screwed)		ND	
Lights		36 Light Tubes / 9 Fixtures			

Building: R7			Room Name/No: Room 23		
Room Dimensions (ft.): L: 31' 3" W: 26' 6" H: 10' 0"			Total Room Ft ² : 828		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Multi-Colored Carpet & Mastic - 95% of Flooring Note: Per sample result R6-2-1	Wood	ND	
Flooring		Green Vinyl Sheet Flooring & Adhesive at Entrance - 5% of Flooring Note: Per sample result R6-4-1	Wood	ND	
Walls		Wood (Painted)		NS	
Walls		White Boards - 3 on South and East Walls	Wood	NS	
	Assumed	Adhesive Assumed; Note: Unable to sample without causing considerable damage		ACM	N
Walls	Assumed	Soft Soak & Adhesive Note: Unable to sample without causing considerable damage	Wood	ACM	N
Cove Base		4" Green Cove Base & Adhesive (Beige) Note: Per sample result R6-3-1		ND	
Ceiling		1' x 1' Ceiling Tile (Nailed/Screwed) Note: Per sample result R6-1-1		ND	
Lights		36 Light Tubes / 9 Fixtures			

Building: R8			Room Name/No: Classroom 34		
Room Dimensions (ft.): L: 10' 8" W: 9' 4" H: 8' 6"			Total Room Ft ² : 100		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	R8-1-1	Off-White Vinyl Sheet Flooring & Mastic	Wood	ND	
Walls	R8-4-1 & R8-4-2	Drywall		ND	
	Assumed	Taping Mud Assumed Positive		ACM	F
Walls	R8-4-1, R8-4-2 & R8-5-1	Soft Soak & Adhesive	Wood	ND	
Cove Base	R8-2-1	4" Gray Cove Base & Adhesive		ND	
Ceiling	R8-3-1	2' x 4' Ceiling Tiles (Drop-down)		ND	
Above Ceiling		Fiberglass Batt Insulation / Ceiling above 2' x 4's		NS	
Attic		Piping, Conduit & Wiring		NS	
Lights		22 Ballasts / 44 Light Tubes / 11 Fixture			

Building: R8			Room Name/No: 34 - Office		
Room Dimensions (ft.): L: 10' 8" W: 9' 4" H: 8' 6"			Total Room Ft ² : 100		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Multi-Colored Carpet & Mastic Note: Per sample result R4-1-1	Wood	ND	
Walls		Drywall Note: Per sample result R8-4-1		ND	
		Assumed Taping Mud Assumed Positive		ACM	F
Walls		Drywall & Taping Mud Note: Per sample result R8-4-1		ND	
Walls		Soft Soak & Adhesive Note: Per sample result R8-4-1 & R8-5-1	Wood	ND	
Cove Base		4" Gray Cove Base & Adhesive Note: Per sample result R8-2-1		ND	
Ceiling		2' x 4' Ceiling Tiles (Drop-down) Note: Per sample result R8-3-1		ND	
Above Ceiling		Fiberglass Batt Insulation / Ceiling above 2' x 4's		NS	
Attic		Piping, Conduit & Wiring		NS	
Lights		2 Ballasts / 4 Light Tubes / 1 Fixture			

Building: R8			Room Name/No: 34 - Boy's Restroom		
Room Dimensions (ft.): L: 7' W: 6' 6" H: 8' 6"			Total Room Ft ² : 46		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Off-White Vinyl Sheet Flooring & Adhesive Note: Per sample result R8-1-1	Wood	ND	
Walls		Drywall Note: Per sample result R8-4-1		ND	
		Assumed Taping Mud Assumed Positive		ACM	F
Walls		White Board - 1 on South	Drywall	NS	
		Assumed Adhesive on White Board; Note: Unable to sample without causing considerable damage		ACM	N
Walls		Fiberglass Reinforced Panels	Drywall	NS	
		Assumed Adhesive is Assumed; Note: Unable to sample without causing considerable damage		ACM	N
Cove Base		Off-White Vinyl Sheet Flooring & Adhesive Curves 6" up Wall Note: Per sample result R8-1-1		ND	
Ceiling		2' x 4' Ceiling Tiles (Drop-down) Note: Per sample result R8-3-1		ND	
Above Ceiling		Fiberglass Batt Insulation / Ceiling above 2' x 4's		NS	
Attic		Piping, Conduit & Wiring		NS	
Lights		5 Ballasts / 12 Light Tubes / 3 Fixtures			

Building: R8			Room Name/No: 34 - Girl's Restroom		
Room Dimensions (ft.): L: 7' W: 6' 6" H: 8' 6"			Total Room Ft ² : 46		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Off-White Vinyl Sheet Flooring & Adhesive Note: Per sample result R8-1-1	Wood	ND	
Walls		Drywall Note: Per sample result R8-4-1		ND	
		Assumed Taping Mud Assumed Positive		ACM	F
Walls		White Board - 1 on South	Drywall	NS	
		Assumed Adhesive on White Board; Note: Unable to sample without causing considerable damage		ACM	N
Walls		Fiberglass Reinforced Panels	Drywall	NS	
		Assumed Adhesive is Assumed; Note: Unable to sample without causing considerable damage		Y	N
Cove Base		Off-White Vinyl Sheet Flooring & Adhesive Curves 6" up Wall Note: Per sample result R8-1-1		ND	
Ceiling		2' x 4' Ceiling Tiles (Drop-down) Note: Per sample result R8-3-1		ND	
Above Ceiling		Fiberglass Batt Insulation / Ceiling above 2' x 4's		NS	
Attic		Piping, Conduit & Wiring		NS	
Lights		5 Ballasts / 12 Light Tubes / 3 Fixtures			

Building: R8			Room Name/No: 34 - Staff Restroom		
Room Dimensions (ft.): L: 7' W: 6' 6" H: 8' 6"			Total Room Ft ² : 46		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Off-White Vinyl Sheet Flooring & Adhesive Note: Per sample result R8-1-1	Wood	ND	
Walls		Drywall Note: Per sample result R8-4-1		ND	
		Assumed Taping Mud Assumed Positive		ACM	F
Walls		White Board - 1 on South	Drywall	NS	
		Assumed Adhesive on White Board; Note: Unable to sample without causing considerable damage		ACM	N
Walls		Fiberglass Reinforced Panels	Drywall	NS	
		Assumed Adhesive is Assumed; Note: Unable to sample without causing considerable damage		ACM	N
Cove Base		Off-White Vinyl Sheet Flooring & Adhesive Curves 6" up Wall Note: Per sample result R8-1-1		ND	
Ceiling		2' x 4' Ceiling Tiles (Drop-down) Note: Per sample result R8-3-1		ND	
Above Ceiling		Fiberglass Batt Insulation / Ceiling above 2' x 4's		NS	
Attic		Piping, Conduit & Wiring		NS	
Lights		5 Ballasts / 12 Light Tubes / 3 Fixtures			

Building: R9			Room Name/No: PTC		
Room Dimensions (ft.): L: 39' 3" W: 23' 9" H: 8' 6"			Total Room Ft ² : 152		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Gray Carpet - Over Vinyl Sheet Flooring	VSF		
Flooring	R9-1-1	Gray Vinyl Sheet Flooring & Mastic (Green) - Under Carpet	Wood	ND	
Walls	R9-5-1	Drywall		ND	
	Assumed	Taping Mud Assumed Positive		ACM	F
Walls	R9-4-1 & R9-5-1	Soft Soak & Adhesive	Drywall	ND	
Walls	Assumed	Tackboard & Adhesive - 1 Tackboard	Drywall	ACM	N
		Note: Unable to sample without causing considerable damage			
Cove Base	R9-2-1	6" Gray Cove Base & Adhesive (Beige)	Drywall	ND	
Ceiling	R9-3-1	2' x 4' Ceiling Tile (Drop-down)		ND	
Above Ceiling		Fiberglass Batt Insulation & Exposed Framing		NS	
Lights		24 Ballasts / 24 Light Tubes / 12 Fixtures			

Building: R9					
Room Dimensions (ft.): L: 14' 6" W: 10' 6" H: 8' 6"			Room Name/No: Storage		
Total Room Ft ² : 932					
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Gray Carpet - Over Vinyl Sheet Flooring	VSF	ND	
Flooring		Gray Vinyl Sheet Flooring & Mastic (Green) - Under Carpet	Wood	ND	
		Note: Per sample result R9-1-1			
Walls		Drywall Note: Per sample result R9-5-1		ND	
		Assumed Taping Mud Assumed Positive		ACM	F
Walls		Soft Soak & Adhesive Note: Per sample result R9-4-1	Drywall		
Cove Base		4" Gray Cove Base & Adhesive (Beige) Note: Per sample result R9-2-1		ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Per sample result R9-3-1		ND	
Above Ceiling		Fiberglass Batt Insulation & Exposed Framing		NS	
Lights		4 Ballasts / 4 Light Tubes / 2 Fixtures			

Building: R9					
Room Dimensions (ft.): L: 9' W: 9' 3" H: 8' 6"			Room Name/No: Kitchen		
Total Room Ft ² : 83					
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Vinyl Sheet Flooring & Mastic (Green) Note: Per sample result R9-1-1	Wood	ND	
Walls		Drywall Note: Per sample result R9-5-1		ND	
		Assumed Taping Mud Assumed Positive		ACM	F
Cove Base		Vinyl Sheet Flooring & Mastic (Yellow) Curves up Wall Note: Per sample result R9-1-1		ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Per sample result R9-3-1		ND	
Above Ceiling		Fiberglass Batt Insulation		NS	
Lights		2 Ballasts / 2 Light Tubes / 1 Fixture			

Building: R9					
Room Dimensions (ft.): L: 9' W: 5' 6" H: 8'			Room Name/No: Staff Restroom		
Total Room Ft ² : 50					
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring	R9-1-2	Vinyl Sheet Flooring & Mastic (Yellow)	Wood	ND	
Walls		Drywall Note: Per sample result R9-5-1		ND	
		Assumed Taping Mud Assumed Positive		ACM	F
Walls		Fiberglass Reinforced Panels	Drywall	NS	
		Assumed Adhesive is Assumed; Note: Unable to sample without causing considerable damage		Y	N
Cove Base		Vinyl Sheet Flooring & Mastic (Yellow) Curves up Wall Note: Per sample result R9-1-2		ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Per sample result R9-3-1		ND	
Above Ceiling		Fiberglass Batt Insulation & Exposed Framing		NS	
Lights		2 Ballasts / 2 Light Tubes / 1 Fixture			

Building: R9					
Room Dimensions (ft.): L: 9' W: 9' H: 8' 6"			Room Name/No: Student Restroom		
Total Room Ft ² : 81					
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Vinyl Sheet Flooring & Mastic (Yellow) Note: Per sample result R9-1-2	Wood	ND	
Walls		Drywall Note: Per sample result R9-5-1		ND	
		Assumed Taping Mud Assumed Positive		ACM	F
Walls		Fiberglass Reinforced Panels	Drywall	NS	
		Assumed Adhesive is Assumed; Note: Unable to sample without causing considerable damage		ACM	N
Cove Base		Vinyl Sheet Flooring & Mastic (Yellow) Curves up Wall Note: Per sample result R9-1-2		ND	
Ceiling		2' x 4' Ceiling Tile (Drop-down) Note: Per sample result R9-3-1		ND	
Above Ceiling		Fiberglass Batt Insulation & Exposed Framing		NS	
Lights		2 Ballasts / 2 Light Tubes / 1 Fixture			

Building: R10			Room Name/No: 26		
Room Dimensions (ft.): L: 28' 9" W: 30' 9" H: 8' 6"			Total Room Ft ² : 884		
Component	Sample No.	Material Description	Substrate	ACM	Friable Y/N
Flooring		Brownish Carpet	Wood	ND	
		Assumed Carpet Adhesive (Beige) Assumed		ACM	N
Walls	R10-4-1	Drywall (Unfinished)		ND	
Walls		White Boards - 2 on East Wall	Drywall	NS	
		Assumed Adhesive on White Board; Note: Unable to sample without causing considerable damage		ACM	N
Walls	R10-3-1 & R10-4-1	Soft Soak Wall Panel & Adhesive	Drywall	ND	
Cove Base	R10-1-1	4" Black Cove Base & Adhesive (Beige)		ND	
Ceiling	R10-2-1	2' x 4' Ceiling Tile (Drop-down)		ND	
Above Ceiling		Fiberglass Batt Insulation & Exposed Framing (Batts are secured to Exposed Framing)		NS	
Attic		Conduit & Wiring		NS	
Lights		18 Ballasts / 36 Light Tubes / 9 Fixtures			

Building: Campus Wide Room Dimensions (ft.): N/A			Room Name/No: Exterior Locations Total Room Ft ² : N/A			
Component	Sample No.	Material Description	Locations	Substrate	ACM	Friable Y/N
Exterior	A-21-1 & A-21-2	Building A: MPR - Exterior Stucco	Building A		D	
Exterior	B-6-1 & B-6-2	Building B: Exterior Stucco	Building B		ND	
Exterior	C-7-1 & C-7-2	Building C: Exterior Stucco	Building C		ND	
Exterior	D-7-1 & D-7-2	Building D: Exterior Stucco	Building D		ND	
Exterior	E-8-1 & E-8-2	Building E: Exterior Stucco	Building E		ND	
Exterior	R4-5-1	Building R4 (Room 28): Exterior Stucco	Building R4 (Room 28)		ND	
Exterior	B-7-1 & B-7-2	Building B: Window Glazing	Building B		ND	
Exterior	C-2-1 & C-2-2	Building C: Window Glazing; Note: 3% Asbestos	Building C		ACM	
Exterior	D-6-1 & D-6-2	Building D: Window Glazing; Note: 3% Asbestos	Building D		ACM	
Exterior	E-7-1	Building E: Window Glazing	Building E		ND	
Exterior	E-7-2	Building E: Window Glazing; Note: 4% Asbestos	Building E		ACM	
Exterior	R3-6-1	Building R3: Exterior Stucco	Building R3 (Room 29)		ND	
Roof	R-1	Built-up Roof with Foam; Note: Felt 1 - 40%; Felt 2/Silver Paint - 50% Asbestos	Multi-Purpose Room Corridor		ACM	
Roof	R-2	Built-up Roof with Foam	Library		D	
Roof	R-3	Built-up Roof with Foam; Note: Felt 1 - 40%; Felt 2/Silver Paint - 50% Asbestos	Multi-Purpose Room		ACM	

Building: Campus Wide Room Dimensions (ft.): N/A			Room Name/No: Exterior Locations Total Room Ft ² : N/A			
Component	Sample No.	Material Description	Locations	Substrate	ACM	Friable Y/N
Roof	R-4	Built-up Roof with Foam	Building B		ND	
Roof	R-5	Built-up Roof with Foam	Building C		ND	
Roof	R-6	Built-up Roof with Foam Note: Felt 1 - 40%; Felt 2 - 70%; Tar 3/Silver Paint - 2% Asbestos	Building Corridor East		ACM	
Roof	R-7	Built-up Roof with Foam	Building D		ND	
Roof	R-8	Built-up Roof with Foam; Note: Felt 1 - 40% Asbestos	Building Corridor West		ACM	
Roof	R-9	Built-up Roof with Foam	Building E		ND	

Table 2

SUMMARY OF BALLASTS & LIGHT TUBES

**Roosevelt Elementary School
2324 Verde Street
Bakersfield, California**

Administration Building (A)		Building R4	
Ballasts	125	Light Tubes	253
Building B		Building R5	
Ballasts	**	Light Tubes	288
Building C		Building R6	
Ballasts	4**	Light Tubes	261
Building D		Building R7	
Ballasts	69	Light Tubes	258
Building E		Building R8	
Ballasts	3**	Light Tubes	129
Building R1		Building R9	
Ballasts	20	Light Tubes	40
Building R2		Building R10	
Ballasts	20	Light Tubes	40
Building R3			
Ballasts	12	Light Tubes	24

Appendix A

Laboratory Report for Asbestos & Chain of Custody (PLM Analysis)



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300461

Customer ID: BROK78

Customer PO:

Project ID:

Attention: Lab Reports

Provost & Pritchard Consulting Group

455 West Fir Avenue

Clovis, CA 93611

Phone: (559) 298-9135

Fax: (559) 298-2281

Received Date: 01/20/2023 10:40 AM

Analysis Date: 01/24/2023

Collected Date: 01/17/2023 - 01/18/2023

Project: Roosevelt Elem School / 2324 Verde St, Bakersfield / 02854-22-002

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
A-1-1-Mastic/Backing 122300461-0001 <i>Materials are inseparable.</i>	Carpet Mastic	Brown/Tan Fibrous Heterogeneous	80% Cellulose	20% Non-fibrous (Other)	None Detected
A-2-1 122300461-0002	Plaster	Gray Non-Fibrous Homogeneous		<1% Mica 100% Non-fibrous (Other)	None Detected
A-2-2 122300461-0003	Plaster	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A-3-1 122300461-0004	2 x 4 C.T. Squiggly Lines	Gray/White Fibrous Heterogeneous	40% Cellulose 40% Min. Wool	10% Perlite 10% Non-fibrous (Other)	None Detected
A-4-1 122300461-0005	2 x 4 C.T. Pinholes	Gray/White Fibrous Heterogeneous	50% Cellulose 30% Min. Wool	10% Perlite 10% Non-fibrous (Other)	None Detected
A-5-1-VSF 122300461-0006	VSF W/ Mastic	Gray Fibrous Heterogeneous	15% Cellulose 3% Synthetic 2% Glass	80% Non-fibrous (Other)	None Detected
A-5-1-Mastic 122300461-0006A	VSF W/ Mastic	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A-6-1-Texture 122300461-0007	DW W/ TM / Text	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
A-6-1-Taping Mud 122300461-0007A	DW W/ TM / Text	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
A-6-1-Drywall 122300461-0007B	DW W/ TM / Text	Brown/Green Fibrous Heterogeneous	10% Cellulose	85% Gypsum 5% Non-fibrous (Other)	None Detected
A-6-2-Texture 122300461-0008	DW W/ TM / Text	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
A-6-2-Taping Mud 122300461-0008A	DW W/ TM / Text	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
A-6-2-Drywall 122300461-0008B	DW W/ TM / Text	Brown/White Fibrous Heterogeneous	10% Cellulose 2% Glass	85% Gypsum 3% Non-fibrous (Other)	None Detected
A-7-1-Cove Base 122300461-0009	4" CB W/ Mastic	Brown Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A-7-1-Mastic 122300461-0009A	4" CB W/ Mastic	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
A-8-1-Mastic/Backing 122300461-0010	Carpet Mastic	Brown/Tan Fibrous Heterogeneous	90% Cellulose	10% Non-fibrous (Other)	None Detected

Initial report from: 01/25/2023 11:40:13



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300461

Customer ID: BROK78

Customer PO:

Project ID:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Non-Asbestos					Asbestos
Sample	Description	Appearance	% Fibrous	% Non-Fibrous	% Type
Materials are inseparable.					
A-9-1	2 x 4 C.T.	Gray/White Fibrous Heterogeneous	50% Cellulose 30% Min. Wool	10% Perlite 10% Non-fibrous (Other)	None Detected
122300461-0011					
A-10-1-Cove Base	4" CB W/ Mastic	Blue Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300461-0012					
A-10-1-Mastic 1	4" CB W/ Mastic	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300461-0012A					
A-10-1-Mastic 2	4" CB W/ Mastic	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300461-0012B					
A-11-1-Texture/Taping Mud	DW W/ TM / Text	White/Beige Non-Fibrous Heterogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
122300461-0013					
Materials are inseparable.					
A-11-1-Drywall	DW W/ TM / Text	Brown/White Fibrous Heterogeneous	10% Cellulose	85% Gypsum 5% Non-fibrous (Other)	None Detected
122300461-0013A					
A-11-2-Texture/Taping Mud	DW W/ TM / Text	White/Beige Non-Fibrous Heterogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
122300461-0014					
Materials are inseparable.					
A-11-2-Drywall	DW W/ TM / Text				Insufficient Material
122300461-0014A					
A-11-3-Texture	DW W/ TM / Text	White/Beige Non-Fibrous Heterogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
122300461-0015					
Textures are inseparable.					
A-11-3-Taping Mud	DW W/ TM / Text	Beige Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
122300461-0015A					
A-11-3-Drywall	DW W/ TM / Text	Brown/White Fibrous Heterogeneous	10% Cellulose 2% Glass	85% Gypsum 3% Non-fibrous (Other)	None Detected
122300461-0015B					
A-13-1	Plaster	White Non-Fibrous Homogeneous		2% Mica 98% Non-fibrous (Other)	None Detected
122300461-0016					
A-13-2	Plaster	White Non-Fibrous Homogeneous		2% Mica 98% Non-fibrous (Other)	None Detected
122300461-0017					
A-13-3	Plaster	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300461-0018					
A-14-1-VSF	VSF W/ Mastic	Gray Fibrous Heterogeneous	15% Cellulose 3% Synthetic 2% Glass	80% Non-fibrous (Other)	None Detected
122300461-0019					
A-14-1-Mastic	VSF W/ Mastic	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300461-0019A					
A-15-1	Plaster	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300461-0020					

Initial report from: 01/25/2023 11:40:13



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300461

Customer ID: BROK78

Customer PO:

Project ID:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
A-16-1-VSF/Mastic	VSF W/ Mastic	Various Fibrous Heterogeneous	10% Cellulose 2% Glass	88% Non-fibrous (Other)	None Detected
122300461-0021					
Materials are inseparable.					
A-17-1-Cove Base	3" CB W/ Mastic	Brown Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300461-0022					
A-17-1-Mastic	3" CB W/ Mastic	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300461-0022A					
A-18-1-VSF	VSF W/ Mastic	Various Fibrous Heterogeneous	5% Synthetic 2% Glass	93% Non-fibrous (Other)	None Detected
122300461-0023					
A-18-1-Mastic	VSF W/ Mastic	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300461-0023A					
A-18-1-Leveler	VSF W/ Mastic	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300461-0023B					
A-19-1-Texture	DW W/ TM / Text	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
122300461-0024					
A-19-1-Taping Mud	DW W/ TM / Text	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
122300461-0024A					
A-19-1-Drywall	DW W/ TM / Text	Brown/White Fibrous Heterogeneous	10% Cellulose <1% Glass	85% Gypsum 5% Non-fibrous (Other)	None Detected
122300461-0024B					
A-20-1	Plaster	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300461-0025					
A-21-1-Skim Coat	Ext. Stucco	Tan Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300461-0026					
A-21-1-Base Coat	Ext. Stucco	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300461-0026A					
A-21-2-Skim Coat	Ext. Stucco	Tan Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300461-0027					
A-21-2-Base Coat	Ext. Stucco	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300461-0027A					
A-22-1	Plaster	Gray Non-Fibrous Homogeneous		2% Mica 98% Non-fibrous (Other)	None Detected
122300461-0028					
A-22-2	Plaster	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300461-0029					

Initial report from: 01/25/2023 11:40:13



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300461

Customer ID: BROK78

Customer PO:

Project ID:

Analyst(s)

Erica Furphy (37)

Jillian Gessner (11)

Michelle Wilson, Laboratory Manager
or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Phoenix, AZ NVLAP Lab Code 200811-0, AZ0937, CO AL-19027, CA 2761, TX 300484, HI L-14-004, LA 05113

Initial report from: 01/25/2023 11:40:13

122500461

PAGE 1 OF 3		SAMPLING DATA & CHAIN OF CUSTODY		TURN-AROUND TIME			
DATE 1-18-23				TESTING LAB: EMSL			
BILL TO: T. BROOKS & ASSOCIATES A Division of PROVOST & PRITCHARD CONSULTING GROUP		PROJECT INFORMATION		☒ 6 HRS. ☐ 24 HRS. ☐ 48 HRS. ☒ 72 HRS. ☐ 10 Days ☐ :			
		PROJECT NAME: ROOSEVELT ELEM SCHOOL ADDRESS: 2324 VERDE ST BAKERSFIELD PROJECT #: 02854-22-002 CONTACT: ☒ TROY B. ☐ TIM T. ☐ TREVOR B. ☐ EG F. MOBIL # (559) 287-8357 284-5573 301-2568 360-3694		EMAIL RESULTS TO: Lab@ppeng.com ANALYSIS ☒ PLM STANDARD ☐ LEAD PAINT D = Drywall, TM = Taping Mud, T = Texture, CB&A = Cove Base Adhesive VFT = Vinyl Floor Tile, VSF = Vinyl Sheet Flooring, CM = Carpet Mastic, CT = Ceiling Tile, ACS = Spray-on Acoustical Ceiling Material.			
SAMPLE #	SAMPLE DESCRIPTION	SAMPLE LOCATION	W-Wall C-Ceiling F-Floor	Condition (Good, Fair, Poor)	S-Surfacing T-Thermal M-Misc.	F-Friable NF-Non Friable	Quantity
A-1-1	carpet mastic	OFFICE	F				
A-2-1	Interior plaster	Storage	W				
A-2-2	plaster	OFFICE	W				
A-3-1	2x4 C.T. squiggly lines	OFFICE	C				
A-4-1	2x4 C.T. pinholes	Bathroom Alcove	C				
A-5-1	VSF w/ mastic	Bathroom Alcove	F				
A-6-1	DW w/ tm/text.	Restroom	W				
A-6-2	DW w/ tm/text	Janitor Room	W				
A-7-1	4" CB w/ mastic	OFFICE	W				
A-8-1	Carpet mastic	ADMIN OFFICE	F				
TRANSACTIONS		TRANSACTIONS		SHIPPING PAID BY :			
(RELINQUISHED BY SIGNATURE)		DATE: 1-19-23		(APPROVED BY SIGNATURE) <i>CS</i>		DATE: 1/19/23 1040	
(RELINQUISHED BY SIGNATURE)		DATE:		(APPROVED BY SIGNATURE)		LAB ☒ CLIENT _____ BROOKS _____	

etx 7965 51514 4811

#122300461

PAGE <u>2</u> OF <u>3</u>		SAMPLING DATA & CHAIN OF CUSTODY		TURN-AROUND TIME					
DATE <u>1-18-23</u>				☐ 6 HRS. ☐ 24 HRS. ☐ 48 HRS. ☒ 72 HRS. ☐ 10 Days ☐ :					
BILL TO:  T. BROOKS & ASSOCIATES A Division of PROVOST & PRITCHARD CONSULTING GROUP		TESTING LAB: <u>EMSL</u>		PROJECT INFORMATION PROJECT NAME: <u>ROOSEVELT ELEM SCHOOL</u> ADDRESS: <u>2324 VERDE ST BAKERSFIELD</u> PROJECT #: <u>02854-22-002</u> CONTACT: ☒ TROY B. ☐ TIM T. ☐ TREVOR B. ☐ EG F. MOBIL # (559) 287-8357 284-5573 301-2568 360-3694				☒ X EMAIL RESULTS TO: <u>Lab@ppeng.com</u> ANALYSIS ☒ PLM STANDARD ☐ LEAD PAINT D = Drywall, TM = Taping Mud, T = Texture, CB&A = Cove Base Adhesive VET = Vinyl Floor Tile, VSF = Vinyl Sheet Flooring, CM = Carpet Mastic, CT = Ceiling Tile, ACS = Spray-on Acoustical Ceiling Material.	
SAMPLE #	SAMPLE DESCRIPTION	SAMPLE LOCATION	W-Wall C-Ceiling F-Floor	Condition (Good, Fair, Poor)	S-Surfacing T-Thermal M-Misc.	F-Friable NF-Non Friable	Quantity		
A-9-1	2+4 C-F	ADMIN OFFICE	C						
A-10-1	4" CB w/ mastic	ADMIN OFFICE	W						
A-11-1	DW w/ trul/text	Health	W						
A-11-2	DW w/ trul/text	ADMIN OFFICE	W						
A-11-3	DW w/ trul/text	ADMIN OFFICE	W						
A-12-1	No Sample								
A-13-1	plaster	" "	W						
A-13-2	plaster	" "	W						
A-13-3	plaster	" "	W						
A-14-1	VSF w/ mastic	ADMIN Health OFFICE	F						
TRANSACTIONS		TRANSACTIONS		SHIPPING PAID BY :					
(RELINQUISHED BY SIGNATURE)		DATE: <u>1-19-23</u>	(APPROVED BY SIGNATURE)	DATE:					
(RELINQUISHED BY SIGNATURE)		DATE:	(APPROVED BY SIGNATURE)	DATE:					
				LAB <u>✓</u> CLIENT _____ BROOKS _____					

#122300461

PAGE <u>3</u> OF <u>3</u>		SAMPLING DATA & CHAIN OF CUSTODY		TURN-AROUND TIME			
DATE <u>1-18-23</u>				TESTING LAB: <u>EMSL</u>			
 T. BROOKS & ASSOCIATES A Division of PROVOST & PRITCHARD CONSULTING GROUP		BILL TO:		PROJECT INFORMATION		☒ 6 HRS. ☐ 24 HRS. ☐ 48 HRS. ☒ 72 HRS. ☐ 10 Days ☐ :	
		PROJECT NAME: <u>ROOSEVELT ELEM SCHOOL</u>		☒ ANALYSIS		EMAIL RESULTS TO: <u>Lab@ppeng.com</u>	
		ADDRESS: <u>2324 VERDE ST BAKERSFIELD</u>		☒ PLM STANDARD ☐ LEAD PAINT		D = Drywall, TM = Taping Mud, T = Texture, CB&A = Cove Base Adhesive VFT = Vinyl Floor Tile, VSF = Vinyl Sheet Flooring, CM = Carpet Mastic. CT = Ceiling Tile, ACS = Spray-on Acoustical Ceiling Material.	
		PROJECT # <u>02854-22-002</u>		CONTACT			
CONTACT		☒ TROY B. ☐ TIM T. ☐ TREVOR B. ☐ EG F.		MOBIL # (559)		287-8357 284-5573 301-2568 360-3694	
MOBIL # (559)		287-8357 284-5573 301-2568 360-3694		287-8357 284-5573 301-2568 360-3694		287-8357 284-5573 301-2568 360-3694	

SAMPLE #	SAMPLE DESCRIPTION	SAMPLE LOCATION	W-Wall C-Ceiling F-Floor	Condition (Good, Fair, Poor)	S-Surfacing T-Thermal M-Misc.	F-Friable NF-Non Friable	Quantity
A-15-1	plaster	Admin Hallway	W				
A-16-1	VSF w/ mastic	cafeteria	F				
A-17-1	3 3" CB w/ mastic	cafeteria	W				
A-18-1	VSF w/ mastic	Staff Lounge	F				
A-19-1	DW w/ texture	Staff Lounge	W				
A-20-1	Plaster	Janitor Kitchen closet	W				
A-21-1	Ext stucco	MPR	W				
A-21-2	Ext. Stucco	MPR	W				
A-22-1	plaster	Stage OFFICE - East	W				
A-22-2	plaster	Stage AREA	W				

TRANSACTIONS		TRANSACTIONS		SHIPPING PAID BY :	
(RELINQUISHED BY SIGNATURE)	DATE:	(APPROVED BY SIGNATURE)	DATE:	LAB ☒ CLIENT _____ BROOKS _____	
(RELINQUISHED BY SIGNATURE)	DATE: <u>1-19-23</u>	(APPROVED BY SIGNATURE)	DATE:		



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300457

Customer ID: BROK78

Customer PO:

Project ID:

Attention: Lab Reports

Provost & Pritchard Consulting Group

455 West Fir Avenue

Clovis, CA 93611

Phone: (559) 298-9135

Fax: (559) 298-2281

Received Date: 01/20/2023 10:40 AM

Analysis Date: 01/24/2023

Collected Date: 01/17/2023

Project: Roosevelt Elem School / 2324 Verde St, Bakersfield / 02854-22-002

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos % Type
			% Fibrous	% Non-Fibrous	
B-1-1 122300457-0001	Carpet Adhesive	Green Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
B-1-2 122300457-0002	Carpet Adhesive	Green Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
B-2-1-Cove Base 122300457-0003	4" C.B. W/ Mastic	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
B-2-1-Mastic 122300457-0003A	4" C.B. W/ Mastic	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
B-2-2-Cove Base 122300457-0004	4" C.B. W/ Mastic	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
B-2-2-Mastic 122300457-0004A	4" C.B. W/ Mastic	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
B-3-1 122300457-0005	2' x 4' C.T.	Gray/Beige Fibrous Heterogeneous	40% Cellulose 40% Min. Wool	10% Perlite 10% Non-fibrous (Other)	None Detected
B-3-2 122300457-0006	2' x 4' C.T.	Gray/White Fibrous Heterogeneous	40% Cellulose 40% Min. Wool	10% Perlite 10% Non-fibrous (Other)	None Detected
B-4-1 122300457-0007	12" x 12" C.T.	Tan/White Fibrous Heterogeneous	95% Cellulose	5% Non-fibrous (Other)	None Detected
B-4-2 122300457-0008	12" x 12" C.T.	Tan/White Fibrous Heterogeneous	95% Cellulose	5% Non-fibrous (Other)	None Detected
B-5-1 122300457-0009	Particle Bd Wall Panel	White/Beige Fibrous Heterogeneous	80% Cellulose 10% Synthetic	10% Non-fibrous (Other)	None Detected
B-5-2 122300457-0010	Particle Bd Wall Panel	White/Beige Fibrous Heterogeneous	80% Cellulose 10% Synthetic	10% Non-fibrous (Other)	None Detected
B-6-1-Stucco 1 122300457-0011	Stucco	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
B-6-1-Stucco 2 122300457-0011A	Stucco	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
B-6-2- Stucco 1 122300457-0012	Stucco	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
B-6-2- Stucco 2 122300457-0012A	Stucco	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected

Initial report from: 01/25/2023 11:25:12



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300457

Customer ID: BROK78

Customer PO:

Project ID:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
B-6-2- Stucco 3 122300457-0012B	Stucco	Gray Non-Fibrous Homogeneous		2% Mica 98% Non-fibrous (Other)	None Detected
B-7-1 122300457-0013	Window Glazing	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
B-7-2 122300457-0014	Window Glazing	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
B-8-1-Wrap 122300457-0015	Attic Insulation W/ Facer	Brown/Black Fibrous Heterogeneous	50% Cellulose	50% Non-fibrous (Other)	None Detected
B-8-1-Insulation 122300457-0015A	Attic Insulation W/ Facer	Gray Fibrous Homogeneous	99% Min. Wool	1% Non-fibrous (Other)	None Detected

Analyst(s)

Erica Furphy (10)

Jillian Gessner (11)

Michelle Wilson, Laboratory Manager
or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Phoenix, AZ NVLAP Lab Code 200811-0, AZ0937, CO AL-19027, CA 2761, TX 300484, HI L-14-004, LA 05113

Initial report from: 01/25/2023 11:25:12

#122300457

PAGE <u>1</u> OF <u>2</u>		SAMPLING DATA & CHAIN OF CUSTODY		TURN-AROUND TIME			
DATE <u>1-17-23</u>		TESTING LAB: <u>EMSL</u>		☐ 6 HRS. ☐ 24HRS. ☐ 48HRS. ☒ 72HRS. ☐ 10 Days ☐ :			
BILL TO:  T. BROOKS & ASSOCIATES A Division of PROVOST & PRITCHARD CONSULTING GROUP		PROJECT INFORMATION PROJECT NAME: <u>ROOSEVELT ELEM SCHOOL</u> ADDRESS: <u>2324 VERDE ST, BAKERSFIELD</u> PROJECT #: <u>02854-22-002</u> CONTACT: ☒ TROY B. ☐ TIM T. ☐ TREVOR B. ☐ EG F. MOBIL # (559) 287-8357 284-5573 301-2568 360-3694			☒ X EMAIL RESULTS TO: <u>Lab@ppeng.com</u> ANALYSIS ☒ PLM STANDARD ☐ LEAD PAINT D = Drywall, TM = Taping Mud, T = Texture, CB&A = Cove Base Adhesive VFT = Vinyl Floor Tile, VSF = Vinyl Sheet Flooring, CM = Carpet Mastic, CT = Ceiling Tile, ACS = Spray-on Acoustical Ceiling Material,		
SAMPLE #	SAMPLE DESCRIPTION	SAMPLE LOCATION	W-Wall C-Celling F-Floor	Condition (Good, Fair, Poor)	S-Surfacing T-Thermal M-Misc.	F - Friable NF - Non Friable	Quantity
B-1-1	carpet ADHESIVE	Rm 5th	F	G	M		
B-1-2	" "	Rm 7	F	G	M		
B-2-1	4" C.B. w/ mastic	Rm 5	W	G	M		
B-2-2	4" C.B. w/ mastic	Rm 7	W	G	M		
B-3-1	2'x4' C.T.	Rm 5	C	G	M		
B-3-2	2'x4' C.T.	Rm 7	C	G	M		
B-4-1	12'x12" C.T.	Rm 5	C	G	M		
B-4-2	12" x 12" C.T.	Rm 8	C	G	M		
B-5-1	particle bd wall panel	Rm 5	W	G	M		
B-5-2	particle bd wall panel	Rm 9	W	G	M		
TRANSACTIONS		TRANSACTIONS			SHIPPING PAID BY :		
(RELINQUISHED BY SIGNATURE)		DATE:	(APPROVED BY SIGNATURE)		DATE:	LAB ☒ CLIENT _____ BROOKS _____	
(RELINQUISHED BY SIGNATURE)		DATE:	(APPROVED BY SIGNATURE)		DATE:		

7965 1519 4811

#122300457

PAGE 2 OF 2 SAMPLING DATA & CHAIN OF CUSTODY

DATE 1-17-23

TESTING LAB:

EMSL

TURN-AROUND TIME


☐ 6 HRS. ☐ 24HRS. ☐ 48HRS. ☒ 72HRS. ☐ 10 Days ☐

BILL TO:

PROJECT INFORMATION

☒ X

EMAIL RESULTS TO: Lab@ppeng.com

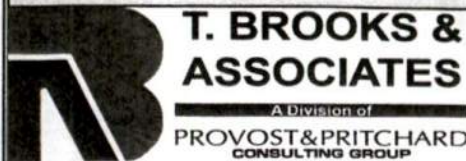

PROJECT NAME: ROOSEVELT ELEM SCHOOL

ADDRESS: 2324 VERDE ST, BAKERSFIELD

PROJECT # 02854-22-002

CONTACT ☒ TROY B. ☐ TIM T. ☐ TREVOR B. ☐ EG F.

MOBIL # (559) 287-8357 284-5573 301-2568 360-3694

ANALYSIS

☒ PLM STANDARD ☐ LEAD PAINT

D = Drywall, TM = Taping Mud, T = Texture, CB&A = Cove Base Adhesive

VFT = Vinyl Floor Tile, VSF = Vinyl Sheet Flooring, CM = Carpet Mastic,

CT = Ceiling Tile, ACS = Spray-on Acoustical Ceiling Material,

SAMPLE #	SAMPLE DESCRIPTION	SAMPLE LOCATION	W-Wall C-Ceiling F-Floor	Condition (Good, Fair, Poor)	S-Surfacing T-Thermal M-Misc.	F - Friable NF - Non Friable	Quantity
B-6-1	Stucco	Exterior	W				
B-6-2	Stucco	Exterior	W				
B-7-1	Window Glazing	Exterior	W				
B-7-2	Window Glazing	Exterior	W				
B-8-1	Attic Insulation w/ Facer	Rm 8					
B-8-2	Attic Insulation	Rm 9					

TRANSACTIONS

(RELINQUISHED BY SIGNATURE)

DATE:

TRANSACTIONS

(APPROVED BY SIGNATURE)

DATE:

SHIPPING PAID BY :

(RELINQUISHED BY SIGNATURE)

DATE:

(APPROVED BY SIGNATURE)

DATE:

LAB 
CLIENT _____
BROOKS _____



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300460

Customer ID: BROK78

Customer PO:

Project ID:

Attention: Lab Reports

Provost & Pritchard Consulting Group

455 West Fir Avenue

Clovis, CA 93611

Phone: (559) 298-9135

Fax: (559) 298-2281

Received Date: 01/20/2023 10:40 AM

Analysis Date: 01/24/2023

Collected Date: 01/17/2023

Project: Roosevelt Elem School / 2324 Verde St, Bakersfield / 02854-22-002

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
C-1-1 122300460-0001	Residual Floor Mastic (Beneath Carpet)	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
C-1-2 122300460-0002	Residual Floor Mastic (Beneath Carpet)	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
C-2-1-Glazing 1 122300460-0003	Window Glazing	Tan Non-Fibrous Homogeneous		97% Non-fibrous (Other)	3% Chrysotile
C-2-1-Glazing 2 122300460-0003A	Window Glazing	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
C-2-2 122300460-0004	Window Glazing	Tan Non-Fibrous Homogeneous		97% Non-fibrous (Other)	3% Chrysotile
C-3-1 122300460-0005	2' x 4' C.T.	Gray/White Fibrous Heterogeneous	40% Cellulose 40% Min. Wool	10% Perlite 10% Non-fibrous (Other)	None Detected
C-3-2 122300460-0006	2' x 4' C.T.	Gray/White Fibrous Heterogeneous	40% Cellulose 40% Min. Wool	10% Perlite 10% Non-fibrous (Other)	None Detected
C-4-1 122300460-0007	12" x 12" C.T.	Tan/White Fibrous Heterogeneous	95% Cellulose	5% Non-fibrous (Other)	None Detected
C-4-2 122300460-0008	12" x 12" C.T.	Tan/White Fibrous Heterogeneous	95% Cellulose	5% Non-fibrous (Other)	None Detected
C-5-1 122300460-0009	Particle Bd Wall Panel	White/Beige Fibrous Heterogeneous	80% Cellulose 10% Synthetic	10% Non-fibrous (Other)	None Detected
C-5-2 122300460-0010	Particle Bd Wall Panel	Tan/White Fibrous Heterogeneous	80% Cellulose 10% Synthetic	10% Non-fibrous (Other)	None Detected
C-6-1-Cove Base 122300460-0011	4" CB W/ Mastic	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
C-6-1-Mastic 122300460-0011A	4" CB W/ Mastic	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
C-6-2-Cove Base 122300460-0012	4" CB W/ Mastic	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
C-6-2-Mastic 122300460-0012A	4" CB W/ Mastic	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
C-7-1-Stucco 1 122300460-0013	Stucco	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected

Initial report from: 01/25/2023 11:43:10



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300460

Customer ID: BROK78

Customer PO:

Project ID:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
C-7-1-Stucco 2 122300460-0013A	Stucco	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
C-7-2-Stucco 1 122300460-0014	Stucco	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
C-7-2-Stucco 2 122300460-0014A	Stucco	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
C-8-1-Wrap 122300460-0015	Attic Ins W/ Facer	Brown/Black Fibrous Heterogeneous	50% Cellulose	50% Non-fibrous (Other)	None Detected
C-8-1-Insulation 122300460-0015A	Attic Ins W/ Facer	Gray Fibrous Homogeneous	99% Min. Wool	1% Non-fibrous (Other)	None Detected
C-9-1-VSF 122300460-0016	VSF W/ Mastic	Various Fibrous Heterogeneous	10% Synthetic 3% Glass	87% Non-fibrous (Other)	None Detected
C-9-1-Mastic 122300460-0016A	VSF W/ Mastic	Clear Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
C-10-1 122300460-0017	FRP Adhesive	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
C-11-1-Texture 122300460-0018 <i>No Drywall present.</i>	DW W/ TM	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
C-11-1-Taping Mud 122300460-0018A	DW W/ TM	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
C-11-2-Taping Mud 122300460-0019 <i>No Drywall present.</i>	DW W/ TM	White Non-Fibrous Homogeneous		20% Ca Carbonate 80% Non-fibrous (Other)	None Detected
C-12-1 122300460-0020	Plaster	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
C-12-2 122300460-0021	Plaster	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
C-12-3 122300460-0022	Plaster	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
C-12-4 122300460-0023	Plaster	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300460

Customer ID: BROK78

Customer PO:

Project ID:

Analyst(s)

Jillian Gessner (20)

Paul Gosh (11)

Michelle Wilson, Laboratory Manager
or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Phoenix, AZ NVLAP Lab Code 200811-0, AZ0937, CO AL-19027, CA 2761, TX 300484, HI L-14-004, LA 05113

Initial report from: 01/25/2023 11:43:10

#122300460

PAGE <u>1</u> OF <u>3</u>		SAMPLING DATA & CHAIN OF CUSTODY		TURN-AROUND TIME			
DATE <u>1-17-23</u>		TESTING LAB: <u>EMSL</u>		☐ 6 HRS. ☐ 24HRS. ☐ 48HRS. ☒ 72HRS. ☐ 10 Days ☐ :			
BILL TO:		PROJECT INFORMATION			☒ X EMAIL RESULTS TO: <u>Lab@ppeng.com</u>		
 T. BROOKS & ASSOCIATES A Division of PROVOST & PRITCHARD CONSULTING GROUP		PROJECT NAME: <u>ROOSEVELT ELEM SCHOOL</u>			ANALYSIS		
		ADDRESS: <u>2324 VERDE ST, PAKENSBUILD</u>			☒ PLM STANDARD ☐ LEAD PAINT		
		PROJECT # <u>02854-22-002</u>			D = Drywall, TM = Taping Mud, T = Texture, CB&A = Cove Base Adhesive VFT = Vinyl Floor Tile, VSF = Vinyl Sheet Flooring, CM = Carpet Mastic, CT = Ceiling Tile, ACS = Spray-on Acoustical Ceiling Material,		
		CONTACT ☒ TROY B. ☐ TIM T. ☐ TREVOR B. ☐ EG F.					
MOBIL # (559)		287-8357 284-5573 301-2568 360-3694					

SAMPLE #	SAMPLE DESCRIPTION	SAMPLE LOCATION	W-Wall C-Celling F-Floor	Condition (Good, Fair, Poor)	S-Surfacing T-Thermal M-Misc.	F-Friable NF-Non Friable	Quantity
C-1-1	Residual Floor mastic (beneath carpet)	Rm 13	F	G			
C-1-2	" "	Rm 15	F	G			
C-2-1	Window Glazing	Rm 13	W	G			
C-2-2	" "	Rm 14	W	G			
C-3-1	2'x4' C.T.	Rm 13	C	G			
C-3-2	2'x4' C.T.	Rm 14	C	G			
C-4-1	12" x 12" C.T.	Rm 13	C	F			
C-4-2	12" x 12" C.T.	Rm 16	C	F			
C-5-1	particle board wall panel	Rm 13	W	G			
C-5-2	particle board wall panel	Rm 16	W	G			

TRANSACTIONS		TRANSACTIONS		SHIPPING PAID BY :	
(RELINQUISHED BY SIGNATURE)	DATE:	(APPROVED BY SIGNATURE)	DATE:	LAB ☒ CLIENT _____ BROOKS _____	
(RELINQUISHED BY SIGNATURE)	DATE:	(APPROVED BY SIGNATURE)	DATE:		

77465 1519 41811

PAGE 2 OF 3 SAMPLING DATA & CHAIN OF CUSTODY

DATE

1-17-23

TESTING LAB:

EMSL

TURN-AROUND TIME

☐ 6 HRS. ☐ 24HRS. ☐ 48HRS. ☒ 72HRS. ☐ 10 Days ☐

BILL TO:

PROJECT INFORMATION

☒ X

EMAIL RESULTS TO: Lab@ppeng.com

**T. BROOKS & ASSOCIATES**A Division of
PROVOST & PRITCHARD
CONSULTING GROUP

PROJECT NAME:

ROOSEVELT ELEM SCHOOL

ADDRESS:

2324 VERDE ST, PAKENFIELD

PROJECT #

02854-22-002

CONTACT

☒ TROY B. ☐ TIM T. ☐ TREVOR B. ☐ EG F.

MOBIL # (559)

287-8357 284-5573 301-2568 360-3694

ANALYSIS

☒ PLM STANDARD ☐ LEAD PAINT

D = Drywall, TM = Taping Mud, T = Texture, CB&A = Cove Base Adhesive

VFT = Vinyl Floor Tile, VSF = Vinyl Sheet Flooring, CM = Carpet Mastic,

CT = Ceiling Tile, ACS = Spray-on Acoustical Ceiling Material,

SAMPLE #	SAMPLE DESCRIPTION	SAMPLE LOCATION	W-Wall C-Ceiling F-Floor	Condition (Good, Fair, Poor)	S-Surfacing T- Thermal M-Misc.	F - Friable NF - Non Friable	Quantity
C-6-1	4" CB w/mastic Stucco	Ext. RM 13	W				
C-6-2	4" CB w/mastic Stucco	Ext. RM #16	W				
C-7-1	Stucco	Ext.	W				
C-7-2	Stucco	Ext.	W				
C-8-1	Attic Ins w/ Facer	Attic					
C-9-1	VSF w/ mastic	STAFF Restroom	F				
C-10-1	FRP ADHESIVE	STAFF Restroom	W				
C-11-1	DW w/tm	Staff Restroom	W				
C-11-2	DW w/tm	" "	W				
C-12-1	Plaster	Storage Rm	W				

TRANSACTIONS

(RELINQUISHED BY SIGNATURE)

DATE:

TRANSACTIONS

(APPROVED BY SIGNATURE)

DATE:

SHIPPING PAID BY :

(RELINQUISHED BY SIGNATURE)

DATE:

(APPROVED BY SIGNATURE)

DATE:

LAB ☒
CLIENT _____
BROOKS _____

#122300460

PAGE <u>3</u> OF <u>3</u>		SAMPLING DATA & CHAIN OF CUSTODY		TURN-AROUND TIME			
DATE <u>1-17-23</u>		TESTING LAB: <u>EMSL</u>		☐ 6 HRS. ☐ 24HRS. ☐ 48HRS. ☒ 72HRS. ☐ 10 Days ☐ :			
BILL TO:		PROJECT INFORMATION			EMAIL RESULTS TO: <u>Lab@ppeng.com</u>		
 T. BROOKS & ASSOCIATES A Division of PROVOST & PRITCHARD CONSULTING GROUP		PROJECT NAME: <u>ROOSEVELT ELEM SCHOOL</u>			ANALYSIS		
		ADDRESS: <u>2324 VERDE ST BAKERSFIELD</u>			☒ PLM STANDARD ☐ LEAD PAINT		
		PROJECT #: <u>02854-22-002</u>			D = Drywall, TM = Taping Mud, T = Texture, CB&A = Cove Base Adhesive		
		CONTACT: ☒ TROY B. ☐ TIM T. ☐ TREVOR B. ☐ EG F.			VFT = Vinyl Floor Tile, VSF = Vinyl Sheet Flooring, CM = Carpet Mastic,		
MOBIL # (559)		287-8357 284-5573 301-2568 360-3694			CT = Ceiling Tile, ACS = Spray-on Acoustical Ceiling Material,		

SAMPLE #	SAMPLE DESCRIPTION	SAMPLE LOCATION	W-Wall C-Ceiling F-Floor	Condition (Good, Fair, Poor)	S-Surfacing T- Thermal M-Misc.	F - Friable NF - Non Friable	Quantity
<u>C-12-2</u>	<u>plaster</u>	<u>Storage</u>	<u>W</u>	<u>G</u>	<u>M</u>	<u>NF</u>	
<u>C-12-3</u>	<u>plaster</u>	<u>Girls Restroom</u>	<u>W</u>	<u>G</u>	<u>M</u>	<u>N</u>	
<u>C-12-4</u>	<u>plaster</u>	<u>Boys Restroom</u>	<u>W</u>	<u>G</u>	<u>M</u>	<u>N</u>	

TRANSACTIONS		TRANSACTIONS		SHIPPING PAID BY :	
(RELINQUISHED BY SIGNATURE)	DATE:	(APPROVED BY SIGNATURE)	DATE:	LAB _____ CLIENT _____ BROOKS _____	
(RELINQUISHED BY SIGNATURE)	DATE:	(APPROVED BY SIGNATURE)	DATE:		



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300459

Customer ID: BROK78

Customer PO:

Project ID:

Attention: Lab Reports

Provost & Pritchard Consulting Group

455 West Fir Avenue

Clovis, CA 93611

Phone: (559) 298-9135

Fax: (559) 298-2281

Received Date: 01/20/2023 10:40 AM

Analysis Date: 01/24/2023

Collected Date: 01/17/2023

Project: Roosevelt Elem School / 2324 Verde St, Bakersfield / 02854-22-002

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
D-1-1-Plaster 122300459-0001	Plaster	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
D-1-2-Plaster 122300459-0002	Plaster	White/Yellow Fibrous Heterogeneous	2% Glass	98% Non-fibrous (Other)	None Detected
D-1-3-Plaster 122300459-0003	Plaster	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
D-1-3-Drywall 122300459-0003A	Plaster	Gray/Beige Fibrous Heterogeneous	10% Cellulose	85% Gypsum 5% Non-fibrous (Other)	None Detected
D-2-1 122300459-0004 Mastics are inseparable.	Carpet Mastic	Yellow/Green Non-Fibrous Heterogeneous		100% Non-fibrous (Other)	None Detected
D-2-2 122300459-0005	Carpet Mastic	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
D-3-1-Cove Base 122300459-0006	4" CB W/ Mastic	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
D-3-1-Mastic 122300459-0006A	4" CB W/ Mastic	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
D-3-2-Cove Base 122300459-0007	4" CB W/ Mastic	Blue Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
D-3-2-Mastic 122300459-0007A	4" CB W/ Mastic	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
D-4-1 122300459-0008	2' x 4' C.T.	Gray/White Fibrous Heterogeneous	78% Cellulose 2% Min. Wool	10% Perlite 10% Non-fibrous (Other)	None Detected
D-4-2 122300459-0009	2' x 4' C.T.	Gray/White Fibrous Heterogeneous	70% Cellulose 10% Min. Wool	10% Perlite 10% Non-fibrous (Other)	None Detected
D-5-1 122300459-0010	12" x 12" C.T.	Brown/White Fibrous Heterogeneous	95% Cellulose	5% Non-fibrous (Other)	None Detected
D-5-2 122300459-0011	12" x 12" C.T.	Brown/White Fibrous Heterogeneous	95% Cellulose	5% Non-fibrous (Other)	None Detected
D-6-1 122300459-0012	Window Glazing	Beige Non-Fibrous Homogeneous		97% Non-fibrous (Other)	3% Chrysotile
D-6-2 122300459-0013	Window Glazing	Beige Non-Fibrous Homogeneous		97% Non-fibrous (Other)	3% Chrysotile

Initial report from: 01/25/2023 11:30:11



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300459

Customer ID: BROK78

Customer PO:

Project ID:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
D-7-1-Coating 122300459-0014	Stucco	White/Beige Non-Fibrous Heterogeneous		100% Non-fibrous (Other)	None Detected
D-7-1-Stucco 122300459-0014A	Stucco	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
D-7-2-Stucco 122300459-0015	Stucco	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
D-8-1-Skim Coat 122300459-0016	Plaster	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
D-8-1-Base Coat 122300459-0016A	Plaster	Gray Non-Fibrous Homogeneous		<1% Mica 100% Non-fibrous (Other)	None Detected
D-8-2-Plaster 122300459-0017	Plaster	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
D-9-1 122300459-0018	FRP Adh	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
D-10-1-VSF 122300459-0019	VSF W/ Mastic	Gray/Beige Fibrous Heterogeneous	5% Synthetic 2% Glass	93% Non-fibrous (Other)	None Detected
D-10-1-Mastic 122300459-0019A	VSF W/ Mastic	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected

Analyst(s)

Erica Furphy (15)

Jillian Gessner (10)

Michelle Wilson, Laboratory Manager
or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Phoenix, AZ NVLAP Lab Code 200811-0, AZ0937, CO AL-19027, CA 2761, TX 300484, HI L-14-004, LA 05113

Initial report from: 01/25/2023 11:30:11

PAGE <u>1</u> OF <u>2</u>		SAMPLING DATA & CHAIN OF CUSTODY		TURN-AROUND TIME			
DATE <u>1-17-23</u>		TESTING LAB: <u>EMSL</u>		☐ 6 HRS. ☐ 24HRS. ☐ 48HRS. ☒ 72HRS. ☐ 10 Days ☐ :			
BILL TO:		PROJECT INFORMATION			EMAIL RESULTS TO: <u>Lab@ppeng.com</u>		
 T. BROOKS & ASSOCIATES A Division of PROVOST & PRITCHARD CONSULTING GROUP		PROJECT NAME: <u>ROOSEVELT ELEM SCHOOL</u>		ANALYSIS			
		ADDRESS: <u>2324 VERDE ST, BAKERSFIELD</u>		☒ PLM STANDARD ☐ LEAD PAINT			
		PROJECT # <u>02854-22-002</u>		D = Drywall, TM = Taping Mud, T = Texture, CB&A = Cove Base Adhesive VFT = Vinyl Floor Tile, VSF = Vinyl Sheet Flooring, CM = Carpet Mastic,			
		CONTACT: ☒ TROY B. ☐ TIM T. ☐ TREVOR B. ☐ EG F.		CT = Ceiling Tile, ACS = Spray-on Acoustical Ceiling Material,			
MOBIL # (559) <u>287-8357</u>		<u>284-5573</u>		<u>301-2568</u>		<u>360-3694</u>	

SAMPLE #	SAMPLE DESCRIPTION	SAMPLE LOCATION	W-Wall C-Ceiling F-Floor	Condition (Good, Fair, Poor)	S-Surfacing T-Thermal M-Misc.	F - Friable NF - Non Friable	Quantity
D-1-1	plaster	Rm 18	W	G	m	NF	
D-1-2	plaster	Rm 18	W	G	m	NF	
D-1-3	plaster	Rm 18	W	G	m	NF	
D-2-1	carpet mastic	Rm 18	F	G	m	NF	
D-2-2	carpet mastic	Rm 19	F	G	m	NF	
D-3-1	4" CB w/ mastic	Rm 18	W	G	m		
D-3-2	4" CB w/ mastic	Rm 19	W	G	m		
D-4-1	2'x4' C.T.	Rm 18	C	G	m	F	
D-4-2	2'x4' C.T.	Rm 20	C	G	m	F	
D-5-1	12" x 12" C.T.	Rm 20	C	G	m	F	

TRANSACTIONS		TRANSACTIONS		SHIPPING PAID BY :	
(RELINQUISHED BY SIGNATURE)	DATE:	(APPROVED BY SIGNATURE)	DATE:	LAB ☒ CLIENT _____ BROOKS _____	
(RELINQUISHED BY SIGNATURE)	DATE:	(APPROVED BY SIGNATURE)	DATE:		
		<u>CM</u>	<u>1/20/23 1040</u>		

#122300459

PAGE <u>2</u> OF <u>2</u>		SAMPLING DATA & CHAIN OF CUSTODY		TURN-AROUND TIME			
DATE <u>1-17-23</u>		TESTING LAB: <u>EMSL</u>		☐ 6 HRS. ☐ 24 HRS. ☐ 48 HRS. ☒ 72 HRS. ☐ 10 Days ☐ :			
BILL TO:  T. BROOKS & ASSOCIATES A Division of PROVOST & PRITCHARD CONSULTING GROUP		PROJECT INFORMATION PROJECT NAME: <u>ROOSEVELT ELEM SCHOOL</u> ADDRESS: <u>2324 VERDE ST, BAKERSFIELD</u> PROJECT #: <u>02854-22-002</u> CONTACT: ☒ TROY B. ☐ TIM T. ☐ TREVOR B. ☐ EG F. MOBIL # (559) 287-8357 284-5573 301-2568 360-3694			☒ X EMAIL RESULTS TO: <u>Lab@ppeng.com</u> ANALYSIS ☒ PLM STANDARD ☐ LEAD PAINT D = Drywall, TM = Taping Mud, T = Texture, CB&A = Cove Base Adhesive VFT = Vinyl Floor Tile, VSF = Vinyl Sheet Flooring, CM = Carpet Mastic, CT = Ceiling Tile, ACS = Spray-on Acoustical Ceiling Material.		
SAMPLE #	SAMPLE DESCRIPTION	SAMPLE LOCATION	W-Wall C-Ceiling F-Floor	Condition (Good, Fair, Poor)	S-Surfacing T-Thermal M-Misc.	F-Friable NF-Non Friable	Quantity
D-5-2	12" x 12" C.T	Rm 21	C	G	M	F	
D-6-1	WINDOW GLAZING	R Ext.	W	G	M	NF	
D-6-2	WINDOW GLAZING	Ext.	W	G	M	NF	
D-7-1	Stucco	Ext	W	G	M	NF	
D-7-2	Stucco	Ext	W	G	M	NF	
D-8-1	plaster	Custodian Office	W	G	M	NF	
D-8-2	plaster	GIRLS Restroom	W	G	M	NF	
D-9-1	Frep AOH	Staff New Gender Restroom	W	G	M	NF	
D-10-1	VSF w/ mastic	Staff New Gender Restrooms	F	G	M	NF	
TRANSACTIONS			TRANSACTIONS			SHIPPING PAID BY :	
(RELINQUISHED BY SIGNATURE)		DATE:	(APPROVED BY SIGNATURE)		DATE:	LAB ☒ CLIENT _____ BROOKS _____	
(RELINQUISHED BY SIGNATURE)		DATE:	(APPROVED BY SIGNATURE)		DATE:		



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300458

Customer ID: BROK78

Customer PO:

Project ID:

Attention: Lab Reports

Provost & Pritchard Consulting Group

455 West Fir Avenue

Clovis, CA 93611

Phone: (559) 298-9135

Fax: (559) 298-2281

Received Date: 01/20/2023 10:40 AM

Analysis Date: 01/24/2023

Collected Date: 01/17/2023

Project: Roosevelt Elem School / 2324 Verde St, Bakersfield / 02854-22-002

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
E-1-1-Paint 122300458-0001	Plaster W/ Paint	Green Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
E-1-1-Skim Coat 122300458-0001A	Plaster W/ Paint	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
E-1-1-Base Coat 122300458-0001B	Plaster W/ Paint	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
E-1-2-Paint 122300458-0002	Plaster W/ Paint	Green Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
E-1-2-Skim Coat 122300458-0002A	Plaster W/ Paint	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
E-1-2-Base Coat 122300458-0002B	Plaster W/ Paint	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
E-2-1-Cove Base 122300458-0003	4" C.B. W/ Mastic	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
E-2-1-Mastic 122300458-0003A	4" C.B. W/ Mastic	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
E-2-2-Cove Base 122300458-0004	4" C.B. W/ Mastic	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
E-2-2-Mastic 122300458-0004A	4" C.B. W/ Mastic	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
E-3-1-Floor Tile 122300458-0005	24" x 24" Floor Tile W/ Mastic	Various Fibrous Heterogeneous	3% Glass	97% Non-fibrous (Other)	None Detected
E-3-1-Mastic/Leveler 122300458-0005A <i>Materials are inseparable.</i>	24" x 24" Floor Tile W/ Mastic	Gray/Green Non-Fibrous Heterogeneous		100% Non-fibrous (Other)	None Detected
E-3-2-Floor Tile 122300458-0006	24" x 24" Floor Tile W/ Mastic	Various Fibrous Heterogeneous	3% Glass	97% Non-fibrous (Other)	None Detected
E-3-2-Mastic/Leveler 122300458-0006A <i>Materials are inseparable.</i>	24" x 24" Floor Tile W/ Mastic	Gray/Green Non-Fibrous Heterogeneous		100% Non-fibrous (Other)	None Detected
E-4-1 122300458-0007	24" x 24" C.T.	Various Fibrous Heterogeneous	78% Cellulose 2% Min. Wool	10% Perlite 10% Non-fibrous (Other)	None Detected

Initial report from: 01/25/2023 11:28:22



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300458

Customer ID: BROK78

Customer PO:

Project ID:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
E-4-2 122300458-0008	24" x 24" C.T.	Various Fibrous Heterogeneous	78% Cellulose 2% Min. Wool	10% Perlite 10% Non-fibrous (Other)	None Detected
E-5-1 122300458-0009	12" x 12" C.T.	Tan/White Fibrous Heterogeneous	95% Cellulose	5% Non-fibrous (Other)	None Detected
E-5-2 122300458-0010	12" x 12" C.T.	Tan/White Fibrous Heterogeneous	95% Cellulose	5% Non-fibrous (Other)	None Detected
E-6-1 122300458-0011	Plaster	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
E-6-2 122300458-0012	Plaster	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
E-7-1 122300458-0013	Window Glazing	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
E-7-2 122300458-0014	Window Glazing	Tan Non-Fibrous Homogeneous		96% Non-fibrous (Other)	4% Chrysotile
E-8-1-Stucco 1 122300458-0015	Stucco	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
E-8-1-Stucco 2 122300458-0015A	Stucco	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
E-8-2-Stucco 1 122300458-0016	Stucco	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
E-8-2-Stucco 2 122300458-0016A	Stucco	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
E-9-1-Wrap 122300458-0017	F6.1 Ins W/ Facer	Brown/Black Fibrous Heterogeneous	50% Cellulose	50% Non-fibrous (Other)	None Detected
E-9-1-Insulation 122300458-0017A	F6.1 Ins W/ Facer	Gray Fibrous Homogeneous	99% Min. Wool	1% Non-fibrous (Other)	None Detected

Analyst(s)

Erica Furphy (13)

Jillian Gessner (15)

Michelle Wilson

Michelle Wilson, Laboratory Manager
or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Phoenix, AZ NVLAP Lab Code 200811-0, AZ0937, CO AL-19027, CA 2761, TX 300484, HI L-14-004, LA 05113

Initial report from: 01/25/2023 11:28:22

#122300458

PAGE 1 OF 2		SAMPLING DATA & CHAIN OF CUSTODY		TURN-AROUND TIME				
DATE 1-17-23				TESTING LAB: EMSL		☐ 6 HRS. ☐ 24HRS. ☐ 48HRS. ☒ 72HRS. ☐ 10 Days ☐ :		
BILL TO:  T. BROOKS & ASSOCIATES A Division of PROVOST & PRITCHARD CONSULTING GROUP		PROJECT INFORMATION PROJECT NAME: ROOSEVELT ELEM SCHOOL ADDRESS: 2324 VERDE ST BAKERSFIELD PROJECT #: 02854-22-002 CONTACT: ☒ TROY B. ☐ TIM T. ☐ TREVOR B. ☐ EG F. MOBIL # (559) 287-8357 284-5573 301-2568 360-3694			ANALYSIS ☒ PLM STANDARD ☐ LEAD PAINT D = Drywall, TM = Taping Mud, T = Texture, CB&A = Cove Base Adhesive VFT = Vinyl Floor Tile, VSF = Vinyl Sheet Flooring, CM = Carpet Mastic, CT = Ceiling Tile, ACS = Spray-on Acoustical Ceiling Material.		EMAIL RESULTS TO: Lab@ppeng.com	
SAMPLE #	SAMPLE DESCRIPTION	SAMPLE LOCATION	W-Wall C-Ceiling F-Floor	Condition (Good, Fair, Poor)	S-Surfacing T-Thermal M-Misc.	F-Friable NF-Non Friable	Quantity	
E-1-1	plaster w/ paint	Storage Rm 1	W	F	M			
E-1-2	plaster w/ paint	Storage Rm 1	W	F	M			
E-2-1	4" CB w/ mastic	Rm 11	W	G	M			
E-2-2	4" CB w/ mastic	Rm 12	W	G	M			
E-3-1	24" x 24" Floor tile w/ mastic	Rm 11	F	G	M			
E-3-2	24" x 24" Floor tile w/ mastic	Rm 12	F	G	M			
E-4-1	2' x 4' C.T.	Rm 11	C	G	M			
E-4-2	" "	Rm 12	C	G	M			
E-5-1	12" x 12" C.T.	Rm 11	C	P	M			
E-5-2	" "	Rm 12	C	P	M			
TRANSACTIONS		TRANSACTIONS			SHIPPING PAID BY:			
(RELINQUISHED BY SIGNATURE)		DATE:	(APPROVED BY SIGNATURE)		DATE:	LAB _____ CLIENT _____ BROOKS _____		
(RELINQUISHED BY SIGNATURE)		DATE:	(APPROVED BY SIGNATURE)		DATE:			

9965 15194811

#122300458

PAGE 2 OF 2		SAMPLING DATA & CHAIN OF CUSTODY		TURN-AROUND TIME			
DATE 1-17-23		TESTING LAB: EMSL		☐ 6 HRS. ☐ 24HRS. ☐ 48HRS. ☒ 72HRS. ☐ 10 Days ☐ :			
BILL TO:  T. BROOKS & ASSOCIATES A Division of PROVOST & PRITCHARD CONSULTING GROUP		PROJECT INFORMATION PROJECT NAME: ROOSEVELT ELEM SCHOOL ADDRESS: 2324 VERDE ST BAKERSFIELD PROJECT #: 02854-22-002 CONTACT: ☒ TROY B. ☐ TIM T. ☐ TREVOR B. ☐ EG F. MOBIL # (559) 287-8357 284-5573 301-2568 360-3694		☒ ANALYSIS ☒ PLM STANDARD ☐ LEAD PAINT D = Drywall, TM = Taping Mud, T = Texture, CB&A = Cove Base Adhesive VFT = Vinyl Floor Tile, VSF = Vinyl Sheet Flooring, CM = Carpet Mastic. CT = Ceiling Tile, ACS = Spray-on Acoustical Ceiling Material.			
SAMPLE #	SAMPLE DESCRIPTION	SAMPLE LOCATION	W-Wall C-Ceiling F-Floor	Condition (Good, Fair, Poor)	S-Surfacing T-Thermal M-Misc.	F - Friable NF - Non Friable	Quantity
E-6-1	plaster	teachers Restroom	W	G	M	NF	
E-6-2	plaster	Rm 12 - Girls Restroom	W	G	M	NF	
E-7-1	WINDOW GLAZING	Exterior	W	G	M	NF	
E-7-2	WINDOW GLAZING	Exterior	W	G	M	NF	
E-8-1	Stucco	Exterior	W	G	M	NF	
E-8-2	Stucco	Exterior Soffit	C	G	M	NF	
E-9-1	F.G Ins w/ Facer	Rm 12 - Attic	C	G	M	F	
TRANSACTIONS		TRANSACTIONS		SHIPPING PAID BY :			
(RELINQUISHED BY SIGNATURE)		DATE:	(APPROVED BY SIGNATURE)	DATE:	LAB ☒ CLIENT _____ BROOKS _____		
(RELINQUISHED BY SIGNATURE)		DATE:	(APPROVED BY SIGNATURE)	DATE:			



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300438

Customer ID: BROK78

Customer PO:

Project ID:

Attention: Lab Reports
Provost & Pritchard Consulting Group
455 West Fir Avenue
Clovis, CA 93611

Phone: (559) 298-9135

Fax: (559) 298-2281

Received Date: 01/20/2023 10:40 AM

Analysis Date: 01/23/2023

Collected Date: 01/18/2023

Project: Roosevelt Elem School / 2324 Verde St, Bakersfield / 02854-22-002

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
R1-1-1-VSF 122300438-0001	VSF W/ Mastic	Various Fibrous Heterogeneous	15% Cellulose 3% Synthetic 2% Glass	80% Non-fibrous (Other)	None Detected
R1-1-1-Mastic/Leveler 122300438-0001A <i>Materials are inseparable.</i>	VSF W/ Mastic	Gray/Beige Non-Fibrous Heterogeneous		100% Non-fibrous (Other)	None Detected
R1-2-1 122300438-0002	Carpet Mastic	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R1-3-1-Cove Base 122300438-0003	4" CB W/ Mastic	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R1-3-1-Mastic 122300438-0003A	4" CB W/ Mastic	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R1-4-1 122300438-0004	Soft Soak Panel	Various Fibrous Heterogeneous	90% Cellulose	10% Non-fibrous (Other)	None Detected
R1-5-1-Adhesive 122300438-0005	DW W/ Soft Soak Adh	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R1-5-1-Drywall 122300438-0005A	DW W/ Soft Soak Adh	Brown/White Fibrous Heterogeneous	10% Cellulose	85% Gypsum 5% Non-fibrous (Other)	None Detected

Analyst(s)

Jillian Gessner (8)

Michelle Wilson, Laboratory Manager
or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Phoenix, AZ NVLAP Lab Code 200811-0, AZ0937, CO AL-19027, CA 2761, TX 300484, HI L-14-004, LA 05113

Initial report from: 01/24/2023 19:07:37

T. Brooks & Associates, A Division of Provost & Pritchard Consulting Group
455 W. Fir Ave., Fresno, CA 93611 (559) 449-2700

⑮ etx

7465 4519 4811



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300440

Customer ID: BROK78

Customer PO:

Project ID:

Attention: Lab Reports
Provost & Pritchard Consulting Group
455 West Fir Avenue
Clovis, CA 93611

Phone: (559) 298-9135

Fax: (559) 298-2281

Received Date: 01/20/2023 10:40 AM

Analysis Date: 01/23/2023

Collected Date: 01/18/2023

Project: Roosevelt Elem School / 2324 Verde St, Bakersfield / 02854-22-002

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
R2-1-1-Adhesive/ Leveler	Carpet Adh	White/Yellow Non-Fibrous Heterogeneous		100% Non-fibrous (Other)	None Detected
122300440-0001 Materials are inseparable.					
R2-2-1-Adhesive	Unfinished DW W/ Soft Soak Adh	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300440-0002					
R2-2-1-Drywall	Unfinished DW W/ Soft Soak Adh	Brown/White Fibrous Heterogeneous	10% Cellulose	85% Gypsum 5% Non-fibrous (Other)	None Detected
122300440-0002A					
R2-3-1-Cove Base	4" CB W/ Mastic	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300440-0003					
R2-3-1-Mastic	4" CB W/ Mastic	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300440-0003A					
R2-4-1	Soft Soak Panel	Various Fibrous Heterogeneous	90% Cellulose	10% Non-fibrous (Other)	None Detected
122300440-0004					
R2-5-1	2 x 4 C.T.	White/Yellow Fibrous Heterogeneous	95% Glass	5% Non-fibrous (Other)	None Detected
122300440-0005					

Analyst(s)

Jillian Gessner (7)

Michelle Wilson, Laboratory Manager
or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Phoenix, AZ NVLAP Lab Code 200811-0, AZ0937, CO AL-19027, CA 2761, TX 300484, HI L-14-004, LA 05113

Initial report from: 01/24/2023 19:12:09

#122300440

PAGE <u>1</u> OF <u>1</u>		SAMPLING DATA & CHAIN OF CUSTODY		TURN-AROUND TIME			
DATE <u>1-18-23</u>		TESTING LAB: <u>EMSL</u>		☐ 6 HRS. ☐ 24 HRS. ☐ 48 HRS. ☒ 72 HRS. ☐ 10 Days ☐ :			
BILL TO:		PROJECT INFORMATION			☒ X EMAIL RESULTS TO: Lab@ppeng.com		
 T. BROOKS & ASSOCIATES A Division of PROVOST & PRITCHARD CONSULTING GROUP		PROJECT NAME: <u>ROOSEVELT ELEM SCHOOL</u>			ANALYSIS		
		ADDRESS: <u>2324 VERDE ST, BAKERSFIELD</u>			☒ PLM STANDARD ☐ LEAD PAINT		
		PROJECT # <u>02854-22-002</u>			D = Drywall, TM = Taping Mud, T = Texture, CB&A = Cove Base Adhesive VFT = Vinyl Floor Tile, VSF = Vinyl Sheet Flooring, CM = Carpet Mastic,		
		CONTACT ☒ TROY B. ☐ TIM T. ☐ TREVOR B. ☐ EG F.			CT = Ceiling Tile, ACS = Spray-on Acoustical Ceiling Material,		
MOBIL # (559)		287-8357 284-5573 301-2568 360-3694					

SAMPLE #	SAMPLE DESCRIPTION	SAMPLE LOCATION	W-Wall C-Celling F-Floor	Condition (Good, Fair, Poor)	S-Surfacing T-Thermal M-Misc.	F - Friable NF - Non Friable	Quantity
122-1-1	carpet ADH	Rm 35	F				
122-2-1	unfinished DOW w/ softsoak ADH	"	W				
122-3-1	4" CB w/mastic	Rm 35	W				
122-4-1	softsoak panel	"	W				
122-5-1	2x4 C.T.	"	C				

TRANSACTIONS		TRANSACTIONS		SHIPPING PAID BY :	
(RELINQUISHED BY SIGNATURE)	DATE: <u>1/19/23</u>	(APPROVED BY SIGNATURE)	DATE: <u>1/24/2020</u>	LAB <u>✓</u>	
(RELINQUISHED BY SIGNATURE)	DATE:	(APPROVED BY SIGNATURE) <u>on</u>	DATE:	CLIENT <u> </u>	
				BROOKS <u> </u>	

7965 444811 15194811



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300442

Customer ID: BROK78

Customer PO:

Project ID:

Attention: Lab Reports
Provost & Pritchard Consulting Group
455 West Fir Avenue
Clovis, CA 93611

Phone: (559) 298-9135

Fax: (559) 298-2281

Received Date: 01/20/2023 10:40 AM

Analysis Date: 01/23/2023

Collected Date: 01/18/2023

Project: Roosevelt Elem School / 2324 Verde St, Bakersfield / 02854-22-002

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
R3-1-1-Cove Base 122300442-0001	4" CB W/ Adhesive	Green Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R3-1-1-Adhesive 122300442-0001A	4" CB W/ Adhesive	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R3-2-1 122300442-0002	Soft Soak Panel	Tan/White Fibrous Heterogeneous	80% Cellulose 10% Synthetic	10% Non-fibrous (Other)	None Detected
R3-3-1 122300442-0003	12 x 12 C.T.	Tan/White Fibrous Heterogeneous	95% Cellulose	5% Non-fibrous (Other)	None Detected
R3-4-1-VSF 122300442-0004	VSF W/ Mastic	Various Fibrous Heterogeneous	20% Cellulose 2% Glass	78% Non-fibrous (Other)	None Detected
R3-4-1-Mastic 122300442-0004A	VSF W/ Mastic	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R3-5-1 122300442-0005	Carpet Mastic	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R3-6-1-Stucco 1 122300442-0006	Stucco	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R3-6-1-Stucco 2 122300442-0006A	Stucco	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected

Analyst(s)

Jillian Gessner (9)

Michelle Wilson, Laboratory Manager
or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Phoenix, AZ NVLAP Lab Code 200811-0, AZ0937, CO AL-19027, CA 2761, TX 300484, HI L-14-004, LA 05113

Initial report from: 01/24/2023 19:22:40

#122300442

PAGE <u>1</u> OF <u>2</u>		SAMPLING DATA & CHAIN OF CUSTODY		TURN-AROUND TIME			
DATE <u>1-18-23</u>		TESTING LAB: <u>EMSL</u>		☐ 6 HRS. ☐ 24HRS. ☐ 48HRS. ☒ 72HRS. ☐ 10 Days ☐ :			
BILL TO:  T. BROOKS & ASSOCIATES A Division of PROVOST & PRITCHARD CONSULTING GROUP		PROJECT INFORMATION PROJECT NAME: <u>ROOSEVELT ELEM SCHOOL</u> ADDRESS: <u>2324 VERDE ST, BAKERSFIELD</u> PROJECT #: <u>02854-22-002</u> CONTACT: ☒ TROY B. ☐ TIM T. ☐ TREVOR B. ☐ EG F. MOBIL # (559) 287-8357 284-5573 301-2568 360-3694			☒ X EMAIL RESULTS TO: <u>Lab@ppeng.com</u> ANALYSIS ☒ PLM STANDARD ☐ LEAD PAINT D = Drywall, TM = Taping Mud, T = Texture, CB&A = Cove Base Adhesive VFT = Vinyl Floor Tile, VSF = Vinyl Sheet Flooring, CM = Carpet Mastic, CT = Ceiling Tile, ACS = Spray-on Acoustical Ceiling Material,		
SAMPLE #	SAMPLE DESCRIPTION	SAMPLE LOCATION	W-Wall C-Celling F-Floor	Condition (Good, Fair, Poor)	S-Surfacing T-Thermal M-Misc.	F - Friable NF - Non Friable	Quantity
123-1-1	4" CB w/ Adhesive	main room	W				
123-2-1	5ft x 8ft panel	main room	W				
123-3-1	12 x 12 C.T.	Speech Room	C				
123-4-1	VSF w/ mastic	office	F				
123-5-1	carpet mastic	main room	F				
123-6-1	stucco	exterior	W				
TRANSACTIONS		TRANSACTIONS			SHIPPING PAID BY :		
(RELINQUISHED BY SIGNATURE) <u>[Signature]</u>		DATE: <u>1-19-23</u> (APPROVED BY SIGNATURE) <u>[Signature]</u>			DATE: <u>1/19/23/040</u>		
(RELINQUISHED BY SIGNATURE) <u>[Signature]</u>		DATE: (APPROVED BY SIGNATURE) <u>[Signature]</u>			LAB ☒ CLIENT _____ BROOKS _____		

T. Brooks & Associates, A Division of Provost & Pritchard Consulting Group

455 W. Fir Ave., Fresno, CA 93611 (559) 449-2700

efx 7965-183 194811



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300439

Customer ID: BROK78

Customer PO:

Project ID:

Attention: Lab Reports

Provost & Pritchard Consulting Group

455 West Fir Avenue

Clovis, CA 93611

Phone: (559) 298-9135

Fax: (559) 298-2281

Received Date: 01/20/2023 10:40 AM

Analysis Date: 01/23/2023

Collected Date: 01/18/2023

Project: Roosevelt Elem School / 2324 Verde St, Bakersfield / 02854-22-002

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
R4-1-1 122300439-0001	Carpet Mastic	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R4-2-1 122300439-0002	2 x 4 C.T.	Tan/Beige Fibrous Heterogeneous	40% Cellulose 40% Min. Wool	10% Perlite 10% Non-fibrous (Other)	None Detected
R4-3-1 122300439-0003	12" x 12" C.T.	Brown/White Fibrous Heterogeneous	95% Cellulose	5% Non-fibrous (Other)	None Detected
R4-4-1-Cove Base 122300439-0004	4" CB W/ Mastic	Blue Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R4-4-1-Mastic 122300439-0004A	4" CB W/ Mastic	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R4-5-1-Stucco 1 122300439-0005	Stucco	White Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R4-5-1-Stucco 2 122300439-0005A	Stucco	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected

Analyst(s)

Jillian Gessner (7)

Michelle Wilson

Michelle Wilson, Laboratory Manager
or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Phoenix, AZ NVLAP Lab Code 200811-0, AZ0937, CO AL-19027, CA 2761, TX 300484, HI L-14-004, LA 05113

Initial report from: 01/24/2023 19:08:56

#122300439

1 of 1

PAGE <u>2</u> OF <u>2</u> DATE <u>1-18-23</u>		SAMPLING DATA & CHAIN OF CUSTODY TESTING LAB: <u>EMSL</u>		TURN-AROUND TIME ☐ 6 HRS. ☐ 24HRS. ☐ 48HRS. ☒ 72HRS. ☐ 10 Days ☐ :			
BILL TO: T. BROOKS & ASSOCIATES A Division of PROVOST & PRITCHARD CONSULTING GROUP		PROJECT INFORMATION PROJECT NAME: <u>ROOSEVELT ELEM SCHOOL</u> ADDRESS: <u>2324 VERDE ST, PAKENSPFIELD</u> PROJECT #: <u>02854-22-002</u> CONTACT: ☒ TROY B. ☐ TIM T. ☐ TREVOR B. ☐ EG F. MOBIL # (559) <u>287-8357</u> <u>284-5573</u> <u>301-2568</u> <u>360-3694</u>			☒ ANALYSIS ☒ PLM STANDARD ☐ LEAD PAINT D = Drywall, TM = Taping Mud, T = Texture, CB&A = Cove Base Adhesive VFT = Vinyl Floor Tile, VSF = Vinyl Sheet Flooring, CM = Carpet Mastic, CT = Ceiling Tile, ACS = Spray-on Acoustical Ceiling Material,		
EMAIL RESULTS TO: <u>Lab@ppeng.com</u>							

SAMPLE #	SAMPLE DESCRIPTION	SAMPLE LOCATION	W-Wall C-Celling F-Floor	Condition (Good, Fair, Poor)	S-Surfacing T-Thermal M-Misc.	F - Friable NF - Non Friable	Quantity
R4-1-1	carpet mastic	Rm 28	F				
R4-2-1	2x4 c.t.	"	C				
R4-3-1	12'x12" c.t.	"	C				
R4-4-1	4" CB w/ mastic	"	W				
R4-5-1	Stucco	Ext	W				

TRANSACTIONS (RELINQUISHED BY SIGNATURE) <u>[Signature]</u>		DATE: <u>1-19-23</u>	TRANSACTIONS (APPROVED BY SIGNATURE) <u>[Signature]</u>		DATE: <u>1/20/23</u>	SHIPPING PAID BY : LAB ☒ CLIENT ☐ BROOKS ☐	
(RELINQUISHED BY SIGNATURE) <u>[Signature]</u>		DATE:	(APPROVED BY SIGNATURE)		DATE:	LAB ☒ CLIENT ☐ BROOKS ☐	



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300444

Customer ID: BROK78

Customer PO:

Project ID:

Attention: Lab Reports

Provost & Pritchard Consulting Group

455 West Fir Avenue

Clovis, CA 93611

Phone: (559) 298-9135

Fax: (559) 298-2281

Received Date: 01/20/2023 10:40 AM

Analysis Date: 01/23/2023

Collected Date: 01/18/2023

Project: Roosevelt Elem School / 2324 Verde St, Bakersfield / 02854-22-002

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
R5-1-1 <i>122300444-0001</i>	12" x 12 C.T.	Tan/White Fibrous Heterogeneous	95% Cellulose	5% Non-fibrous (Other)	None Detected
R5-2-1-Cove Base <i>122300444-0002</i>	4" CB W/ Mastic	Green Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R5-2-1-Mastic <i>122300444-0002A</i>	4" CB W/ Mastic	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R5-3-1 <i>122300444-0003</i>	Carpet Mastic	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R5-4-1-VSF <i>122300444-0004</i> <i>No Mastic present.</i>	VSF W/ Mastic	Various Fibrous Heterogeneous	20% Cellulose 2% Glass	78% Non-fibrous (Other)	None Detected
R6-1-1 <i>122300444-0005</i>	12 x 12 C.T.	Brown/White Fibrous Heterogeneous	95% Cellulose	5% Non-fibrous (Other)	None Detected
R6-2-1-Mastic/Leveler <i>122300444-0006</i> <i>Materials are inseparable.</i>	Carpet Mastic	Gray/Yellow Non-Fibrous Heterogeneous		100% Non-fibrous (Other)	None Detected
R6-3-1-Cove Base <i>122300444-0007</i>	4" CB W/ Mastic	Green Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R6-3-1-Mastic <i>122300444-0007A</i>	4" CB W/ Mastic	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R6-4-1-VSF <i>122300444-0008</i> <i>No Mastic present.</i>	VSF W/ Mastic	Various Fibrous Heterogeneous	20% Cellulose 2% Glass	78% Non-fibrous (Other)	None Detected



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300444

Customer ID: BROK78

Customer PO:

Project ID:

Analyst(s)

Jillian Gessner (10)

Michelle Wilson, Laboratory Manager
or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Phoenix, AZ NVLAP Lab Code 200811-0, AZ0937, CO AL-19027, CA 2761, TX 300484, HI L-14-004, LA 05113

Initial report from: 01/25/2023 11:06:16

#122300444

PAGE 1 OF 1		SAMPLING DATA & CHAIN OF CUSTODY		TURN-AROUND TIME			
DATE <u>1-18-23</u>		TESTING LAB: <u>EMSL</u>		☐ 6 HRS. ☐ 24 HRS. ☐ 48 HRS. ☒ 72 HRS. ☐ 10 Days ☐			
BILL TO:  T. BROOKS & ASSOCIATES A Division of PROVOST & PRITCHARD CONSULTING GROUP		PROJECT INFORMATION PROJECT NAME: <u>ROOSEVELT ELEM SCHOOL</u> ADDRESS: <u>2324 VERDE ST, BAKERSFIELD</u> PROJECT #: <u>02854-22-002</u> CONTACT: ☒ TROY B. ☐ TIM T. ☐ TREVOR B. ☐ EG F. MOBIL # (559) 287-8357 284-5573 301-2568 360-3694		EMAIL RESULTS TO: <u>Lab@ppeng.com</u> ANALYSIS ☒ PLM STANDARD ☐ LEAD PAINT D = Drywall, TM = Taping Mud, T = Texture, CB&A = Cove Base Adhesive VFT = Vinyl Floor Tile, VSF = Vinyl Sheet Flooring, CM = Carpet Mastic, CT = Ceiling Tile, ACS = Spray-on Acoustical Ceiling Material.			
SAMPLE #	SAMPLE DESCRIPTION	SAMPLE LOCATION	W-Wall C-Ceiling F-Floor	Condition (Good, Fair, Poor)	S-Surfacing T-Thermal M-Misc.	F-Friable NF-Non Friable	Quantity
R5-1-1	12" x 12 C.T.	Room 25	C	G	M	F	
R5-2-1	4" CB w/ mastic	Room 25	W	G	M	NF	
R5-3-1	carpet mastic	Room 25	F	G	M	NF	
R5-4-1	VSF w/ mastic	Room 25	F	G	M	NF	
R6-1-1	12 x 12 C.T.	Room 24	C	G	M	F	
R6-2-1	carpet mastic	Room 24	F	G	M	NF	
R6-3-1	4" CB w/ mastic	Room 24	W	G	M	NF	
R6-4-1	VSF w/ mastic	Rm 24	F	G	M	NF	
TRANSACTIONS		TRANSACTIONS		SHIPPING PAID BY:			
(RELINQUISHED BY SIGNATURE) _____		DATE: <u>1/19/23</u>	(APPROVED BY SIGNATURE) <u>CM</u>		DATE: <u>1-20-23</u>	LAB <u>✓</u>	
(RELINQUISHED BY SIGNATURE) _____		DATE: _____	(APPROVED BY SIGNATURE) _____		DATE: _____	CLIENT _____	
						BROOKS _____	

7965-1-10-11



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300441

Customer ID: BROK78

Customer PO:

Project ID:

Attention: Lab Reports

Provost & Pritchard Consulting Group

455 West Fir Avenue

Clovis, CA 93611

Phone: (559) 298-9135

Fax: (559) 298-2281

Received Date: 01/20/2023 10:40 AM

Analysis Date: 01/23/2023

Collected Date: 01/18/2023

Project: Roosevelt Elem School / 2324 Verde St, Bakersfield / 02854-22-002

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
R8-1-1-Vinyl 122300441-0001	Vinyl Sheet Flooring W/ Mastic	Various Fibrous Heterogeneous	3% Glass	97% Non-fibrous (Other)	None Detected
R8-1-1-Mastic 122300441-0001A	Vinyl Sheet Flooring W/ Mastic	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R8-2-1-Cove Base 122300441-0002	4" Cove Base W/ Adhesive	Blue Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R8-2-1-Adhesive 122300441-0002A	4" Cove Base W/ Adhesive	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R8-3-1 122300441-0003	2' x 4' Ceiling Tile	Gray/White Fibrous Heterogeneous	50% Cellulose 30% Min. Wool	10% Perlite 10% Non-fibrous (Other)	None Detected
R8-4-1-Adhesive 122300441-0004	Drywall W/ Soft Soak Adhesive	Green Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R8-4-1-Drywall 122300441-0004A	Drywall W/ Soft Soak Adhesive	Brown/White Fibrous Heterogeneous	10% Cellulose 2% Glass	85% Gypsum 3% Non-fibrous (Other)	None Detected
R8-4-2-Adhesive 122300441-0005	DW W/ Soft Soak Adh	Green Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R8-4-2-Drywall 122300441-0005A	DW W/ Soft Soak Adh	Brown/White Fibrous Heterogeneous	10% Cellulose 2% Glass	85% Gypsum 3% Non-fibrous (Other)	None Detected
R8-5-1 122300441-0006	Soft Soak Panel	Various Fibrous Heterogeneous	80% Cellulose 10% Synthetic	10% Non-fibrous (Other)	None Detected

Analyst(s)

Jillian Gessner (10)

Michelle Wilson





Michelle Wilson, Laboratory Manager
or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Phoenix, AZ NVLAP Lab Code 200811-0, AZ0937, CO AL-19027, CA 2761, TX 300484, HI L-14-004, LA 05113

Initial report from: 01/24/2023 19:20:17

#122300441

PAGE 1 OF 1		SAMPLING DATA & CHAIN OF CUSTODY		TURN-AROUND TIME			
DATE 1/18/23		TESTING LAB: EMSL		☐ 6 HRS. ☐ 24HRS. ☐ 48HRS. ☒ 72HRS. ☐ 10 Days ☐ :			
BILL TO:  T. BROOKS & ASSOCIATES A Division of PROVOST & PRITCHARD CONSULTING GROUP		PROJECT INFORMATION PROJECT NAME: ROOSEVELT ELEM SCHOOL ADDRESS: 2324 VERDE ST, BAKERSFIELD PROJECT #: 02854-22-002 CONTACT: ☒ TROY B. ☐ TIM T. ☐ TREVOR B. ☐ EG F. MOBIL # (559) 287-8357 284-5573 301-2568 360-3694		☒ X EMAIL RESULTS TO: Lab@ppeng.com ANALYSIS ☒ PLM STANDARD ☐ LEAD PAINT D = Drywall, TM = Taping Mud, T = Texture, CB&A = Cove Base Adhesive VFT = Vinyl Floor Tile, VSF = Vinyl Sheet Flooring, CM = Carpet Mastic, CT = Ceiling Tile, ACS = Spray-on Acoustical Ceiling Material,			
SAMPLE #	SAMPLE DESCRIPTION	SAMPLE LOCATION	W-Wall C-Ceiling F-Floor	Condition (Good, Fair, Poor)	S-Surfacing T-Thermal M-Misc.	F-Friable NF-Non Friable	Quantity
R8-1-1	Vinyl Sheet Flooring w/Mastic	Rm 34	F				
R8-2-1	4" Cove Base w/ Adhesive	"	W				
R8-3-1	2x4" Ceiling Tile	"	C				
R8-4-1	Drywall w/ Soft Soak Adhesive	"	W				
R8-4-2	DW w/ Soft Soak Adh.	"	W				
R8-5-1	Soft Soak Panel	"	W				
TRANSACTIONS		TRANSACTIONS		SHIPPING PAID BY :			
(RELINQUISHED BY SIGNATURE) 		DATE: 1/18/23 (APPROVED BY SIGNATURE) 		DATE: 1/20/23 		LAB ☒ X	
(RELINQUISHED BY SIGNATURE) 		DATE: (APPROVED BY SIGNATURE)		DATE:		CLIENT _____ BROOKS _____	

7965 5/5/19 4811



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300443

Customer ID: BROK78

Customer PO:

Project ID:

Attention: Lab Reports

Provost & Pritchard Consulting Group

455 West Fir Avenue

Clovis, CA 93611

Phone: (559) 298-9135

Fax: (559) 298-2281

Received Date: 01/20/2023 10:40 AM

Analysis Date: 01/23/2023

Collected Date: 01/18/2023

Project: Roosevelt Elem School / 2324 Verde St, Bakersfield / 02854-22-002

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
R9-1-1-VSF 122300443-0001	VSF W/ Mastic	Various Fibrous Heterogeneous	3% Glass	97% Non-fibrous (Other)	None Detected
R9-1-1-Mastic 122300443-0001A	VSF W/ Mastic	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R9-1-2-VSF 122300443-0002	VSF W/ Mastic	Various Fibrous Heterogeneous	3% Glass	97% Non-fibrous (Other)	None Detected
R9-1-2-Mastic 122300443-0002A	VSF W/ Mastic	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R9-2-1-Cove Base 122300443-0003	6" CB W/ Mastic	Gray Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R9-2-1-Mastic 122300443-0003A	6" CB W/ Mastic	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R9-3-1 122300443-0004	2 x 4 C.T.	Gray/White Fibrous Heterogeneous	78% Cellulose 2% Min. Wool	10% Perlite 10% Non-fibrous (Other)	None Detected
R9-4-1 122300443-0005	Soft Soak Panel	Brown/Beige Fibrous Heterogeneous	80% Cellulose 10% Synthetic	10% Non-fibrous (Other)	None Detected
R9-5-1-Adhesive 122300443-0006	DW W/ Soft Soak Adh	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R9-5-1-Drywall 122300443-0006A	DW W/ Soft Soak Adh	Brown/White Fibrous Heterogeneous	10% Cellulose	85% Gypsum 5% Non-fibrous (Other)	None Detected

Analyst(s)

Jillian Gessner (10)

Michelle Wilson

Michelle Wilson, Laboratory Manager
or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Phoenix, AZ NVLAP Lab Code 200811-0, AZ0937, CO AL-19027, CA 2761, TX 300484, HI L-14-004, LA 05113

Initial report from: 01/24/2023 19:26:05

#122300443

PAGE 1 OF 1		SAMPLING DATA & CHAIN OF CUSTODY		TURN-AROUND TIME			
DATE 1-18-23		TESTING LAB: EMSL		☐ 6 HRS. ☐ 24HRS. ☐ 48HRS. ☒ 72HRS. ☐ 10 Days ☐ :			
BILL TO: T. BROOKS & ASSOCIATES A DIVISION OF PROVOST & PRITCHARD CONSULTING GROUP		PROJECT INFORMATION PROJECT NAME: ROOSEVELT ELEM SCHOOL ADDRESS: 2324 VERDE ST BAKERSFIELD PROJECT #: 02854-22-002 CONTACT: ☒ TROY B. ☐ TIM T. ☐ TREVOR B. ☐ EG F. MOBIL # (559) 287-8357 284-5573 301-2568 360-3694		☒ X EMAIL RESULTS TO: Lab@ppeng.com ANALYSIS ☒ PLM STANDARD ☐ LEAD PAINT D = Drywall, TM = Taping Mud, T = Texture, CB&A = Cove Base Adhesive VFT = Vinyl Floor Tile, VSF = Vinyl Sheet Flooring, CM = Carpet Mastic, CT = Ceiling Tile, ACS = Spray-on Acoustical Ceiling Material.			
SAMPLE #	SAMPLE DESCRIPTION	SAMPLE LOCATION	W-Wall C-Ceiling F-Floor	Condition (Good, Fair, Poor)	S-Surfacing T-Thermal M-Misc.	F-Frieble NF-Non Fyiable	Quantity
R9-1-1	VSF w/mastic	PTC main room	F				
R9-1-2	VSF w/mastic	Restroom	F				
R9-2-1	6" CB w/mastic	PTC main room	W				
R9-3-1	2x4 C.T.	PTC main room	W				
R9-4-1	Softsoak panel Drywall w/Softsoak ADH	PTC main room	W				
R9-5-1	Drywall w/Softsoak ADH	PTC main room	W				
TRANSACTIONS		TRANSACTIONS		SHIPPING PAID BY :			
(RELINQUISHED BY SIGNATURE)		DATE: 1-19-23	(APPROVED BY SIGNATURE)	DATE: 1/20/23	LAB ☒		
(RELINQUISHED BY SIGNATURE)		DATE:	(APPROVED BY SIGNATURE)	DATE: 1040	CLIENT _____		
					BROOKS _____		

OrderID: 122300443

287-796518519 4811



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300437

Customer ID: BROK78

Customer PO:

Project ID:

Attention: Lab Reports

Provost & Pritchard Consulting Group

455 West Fir Avenue

Clovis, CA 93611

Phone: (559) 298-9135

Fax: (559) 298-2281

Received Date: 01/20/2023 10:40 AM

Analysis Date: 01/23/2023

Collected Date: 01/18/2023

Project: Roosevelt Elem School / 2324 Verde St, Bakersfield / 02854-22-002

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
R10-1-1-Cove Base 122300437-0001	4" CB W/ Mastic	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R10-1-1-Mastic 122300437-0001A	4" CB W/ Mastic	Beige Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R10-2-1 122300437-0002	2' x 4' C.T.	Various Fibrous Heterogeneous	40% Cellulose 40% Min. Wool	10% Perlite 10% Non-fibrous (Other)	None Detected
R10-3-1 122300437-0003	Soft Soak Panel	Various Fibrous Heterogeneous	90% Cellulose	10% Non-fibrous (Other)	None Detected
R10-4-1-Adhesive 122300437-0004	DW W/ Soft Soak Adh	Tan Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R10-4-1-Drywall 122300437-0004A	DW W/ Soft Soak Adh	Brown/White Fibrous Heterogeneous	10% Cellulose	85% Gypsum 5% Non-fibrous (Other)	None Detected

Analyst(s)

Jillian Gessner (6)

Michelle Wilson

Michelle Wilson, Laboratory Manager
or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Phoenix, AZ NVLAP Lab Code 200811-0, AZ0937, CO AL-19027, CA 2761, TX 300484, HI L-14-004, LA 05113

Initial report from: 01/24/2023 19:06:27

#122300437

PAGE <u>1</u> OF <u>1</u>		SAMPLING DATA & CHAIN OF CUSTODY		TURN-AROUND TIME			
DATE <u>1-18-23</u>		TESTING LAB: <u>EMSL</u>		☐ 6 HRS. ☐ 24HRS. ☐ 48HRS. ☒ 72HRS. ☐ 10 Days ☐ :			
T. BROOKS & ASSOCIATES A Division of PROVOST & PRITCHARD CONSULTING GROUP		PROJECT INFORMATION			ANALYSIS		
		PROJECT NAME: <u>ROOSEVELT ELEM SCHOOL</u>			☒ PLM STANDARD ☐ LEAD PAINT		
		ADDRESS: <u>2324 VERDE ST, BAKERSFIELD</u>			D = Drywall, TM = Taping Mud, T = Texture, CB&A = Cove Base Adhesive VFT = Vinyl Floor Tile, VSF = Vinyl Sheet Flooring, CM = Carpet Mastic,		
		PROJECT # <u>02854-22-002</u>			CT = Ceiling Tile, ACS = Spray-on Acoustical Ceiling Material,		
		CONTACT ☒ TROY B. ☐ TIM T. ☐ TREVOR B. ☐ EG F.					
		MOBIL # (559) 287-8357 284-5573 301-2568 360-3694					

SAMPLE #	SAMPLE DESCRIPTION	SAMPLE LOCATION	W-Wall C-Ceiling F-Floor	Condition (Good, Fair, Poor)	S-Surfacing T-Thermal M-Misc.	F - Friable NF - Non Friable	Quantity
R10-1-1	4" CS w/ mastic	Room 26	W	G	M	NF	
R10-2-1	2'x4' C.T.	"	C	G	M	F	
R10-3-1	Softsoak panel	"	W	G	M	NF	
R10-4-1	Soft DW w/ Softsoak ACH	"	W	G	M	NF	

TRANSACTIONS		TRANSACTIONS		SHIPPING PAID BY :	
(RELINQUISHED BY SIGNATURE)	DATE: <u>1-19-23</u>	(APPROVED BY SIGNATURE) <u>CS</u>	DATE: <u>1/20/23</u>	LAB ☒	CLIENT _____ BROOKS _____
(RELINQUISHED BY SIGNATURE)	DATE: _____	(APPROVED BY SIGNATURE)	DATE: _____		

796515 194811



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300445

Customer ID: BROK78

Customer PO:

Project ID:

Attention: Lab Reports

Provost & Pritchard Consulting Group

455 West Fir Avenue

Clovis, CA 93611

Phone: (559) 298-9135

Fax: (559) 298-2281

Received Date: 01/20/2023 10:40 AM

Analysis Date: 01/24/2023

Collected Date: 01/18/2023

Project: Roosevelt Elem School / 2324 Verde St, Bakersfield / 02854-22-002

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
R-1-Tar 1 122300445-0001	Built-Up Roof W/ Foam	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R-1-Felt 1 122300445-0001A	Built-Up Roof W/ Foam	Brown Fibrous Homogeneous	40% Cellulose	20% Non-fibrous (Other)	40% Chrysotile
R-1-Tar 2 122300445-0001B	Built-Up Roof W/ Foam	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R-1-Felt 2/Silver Paint 122300445-0001C Materials are inseparable.	Built-Up Roof W/ Foam	Brown/Silver Fibrous Heterogeneous	30% Cellulose	20% Non-fibrous (Other)	50% Chrysotile
R-1-Tar 3 122300445-0001D	Built-Up Roof W/ Foam	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R-1-Felt 3 122300445-0001E	Built-Up Roof W/ Foam	Black Fibrous Homogeneous	20% Glass	80% Non-fibrous (Other)	None Detected
R-1-Foam 122300445-0001F	Built-Up Roof W/ Foam	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R-2-Shingle 1 122300445-0002	Built-Up Roof W/ Foam	Tan/Black Fibrous Heterogeneous	15% Glass	85% Non-fibrous (Other)	None Detected
R-2-Shingle 2 122300445-0002A	Built-Up Roof W/ Foam	Tan/Black Fibrous Heterogeneous	15% Glass	85% Non-fibrous (Other)	None Detected
R-2-Felt 122300445-0002B	Built-Up Roof W/ Foam	Black Fibrous Homogeneous	30% Glass	70% Non-fibrous (Other)	None Detected
R-2-Foam 122300445-0002C	Built-Up Roof W/ Foam	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R-3-Tar 1 122300445-0003	BUR W/ Foam	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R-3-Felt 1 122300445-0003A	BUR W/ Foam	Black Fibrous Homogeneous	40% Cellulose	20% Non-fibrous (Other)	40% Chrysotile
R-3-Tar 2 122300445-0003B	BUR W/ Foam	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R-3-Felt 2/Silver Paint 122300445-0003C Materials are inseparable.	BUR W/ Foam	Black/Silver Fibrous Heterogeneous	30% Cellulose	20% Non-fibrous (Other)	50% Chrysotile

Initial report from: 01/25/2023 11:10:18



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300445

Customer ID: BROK78

Customer PO:

Project ID:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
R-3-Felt 3	BUR W/ Foam	Black Fibrous Homogeneous	20% Glass	80% Non-fibrous (Other)	None Detected
122300445-0003D					
R-3-Foam	BUR W/ Foam	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300445-0003E					
R-4-Shingle 1	BUR W/ Foam	Various Fibrous Heterogeneous	30% Glass	70% Non-fibrous (Other)	None Detected
122300445-0004					
R-4-Foam	BUR W/ Foam	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300445-0004A					
R-4-Shingle 2	BUR W/ Foam	Gray/Black Fibrous Heterogeneous	30% Glass	70% Non-fibrous (Other)	None Detected
122300445-0004B					
R-4-Tar	BUR W/ Foam	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300445-0004C					
R-4-Felt	BUR W/ Foam	Black Fibrous Homogeneous	80% Cellulose	20% Non-fibrous (Other)	None Detected
122300445-0004D					
R-5-Foam	BUR W/ Foam	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300445-0005					
R-5-Shingle 1	BUR W/ Foam	Tan/Black Fibrous Heterogeneous	30% Glass	70% Non-fibrous (Other)	None Detected
122300445-0005A					
R-5-Tar	BUR W/ Foam	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300445-0005B					
R-5-Shingle 2	BUR W/ Foam	Gray/Black Fibrous Heterogeneous	30% Glass	70% Non-fibrous (Other)	None Detected
122300445-0005C					
R-6-Tar 1	BUR W/ Foam	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300445-0006					
R-6-Felt 1	BUR W/ Foam	Black Fibrous Homogeneous	40% Cellulose	20% Non-fibrous (Other)	40% Chrysotile
122300445-0006A					
R-6-Tar 2	BUR W/ Foam	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300445-0006B					
R-6-Felt 2	BUR W/ Foam	Black Fibrous Homogeneous	10% Cellulose	20% Non-fibrous (Other)	70% Chrysotile
122300445-0006C					
R-6-Tar 3/Silver Paint	BUR W/ Foam	Black/Silver Non-Fibrous Heterogeneous		98% Non-fibrous (Other)	2% Chrysotile
122300445-0006D					
Materials are inseparable.					
R-6-Felt 3	BUR W/ Foam	Black Fibrous Homogeneous	20% Glass	80% Non-fibrous (Other)	None Detected
122300445-0006E					
R-6-Foam	BUR W/ Foam	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
122300445-0006F					

Initial report from: 01/25/2023 11:10:18



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300445

Customer ID: BROK78

Customer PO:

Project ID:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
R-7-Shingle 1 122300445-0007	BUR W/ Foam	Tan/Black Fibrous Heterogeneous	30% Glass	70% Non-fibrous (Other)	None Detected
R-7-Shingle 2 122300445-0007A	BUR W/ Foam	Black/Green Fibrous Heterogeneous	30% Cellulose	70% Non-fibrous (Other)	None Detected
R-7-Felt 122300445-0007B	BUR W/ Foam	Black Fibrous Homogeneous	40% Cellulose	60% Non-fibrous (Other)	None Detected
R-7-Foam 122300445-0007C	BUR W/ Foam	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R-7-Shingle 3 122300445-0007D	BUR W/ Foam	Gray/Black Fibrous Heterogeneous	40% Glass	60% Non-fibrous (Other)	None Detected
R-8-Foam 122300445-0008	BUR W/ Foam	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R-8-Shingle 122300445-0008A	BUR W/ Foam	Gray/Black Fibrous Heterogeneous	20% Glass	80% Non-fibrous (Other)	None Detected
R-8-Tar 1 122300445-0008B	BUR W/ Foam	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R-8-Felt 1 122300445-0008C	BUR W/ Foam	Brown Fibrous Homogeneous	40% Cellulose	20% Non-fibrous (Other)	40% Chrysotile
R-8-Tar 2 122300445-0008D	BUR W/ Foam	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R-8-Felt 2 122300445-0008E	BUR W/ Foam	Black Fibrous Homogeneous	30% Glass	70% Non-fibrous (Other)	None Detected
R-9-Shingle 1 122300445-0009	BUR W/ Foam	Various Fibrous Heterogeneous	50% Cellulose	50% Non-fibrous (Other)	None Detected
R-9-Shingle 2 122300445-0009A	BUR W/ Foam	Black/Green Fibrous Heterogeneous	50% Cellulose	50% Non-fibrous (Other)	None Detected
R-9-Shingle 3 122300445-0009B	BUR W/ Foam	Gray/Black Fibrous Heterogeneous	15% Glass	85% Non-fibrous (Other)	None Detected
R-9-Shingle 4 122300445-0009C	BUR W/ Foam	Various Fibrous Heterogeneous	15% Glass	85% Non-fibrous (Other)	None Detected
R-9-Shingle 5 122300445-0009D	BUR W/ Foam	Various Fibrous Heterogeneous	50% Cellulose	50% Non-fibrous (Other)	None Detected
R-9-Felt 1 122300445-0009E	BUR W/ Foam	Black Fibrous Homogeneous	80% Cellulose	20% Non-fibrous (Other)	None Detected
R-9-Tar 122300445-0009F	BUR W/ Foam	Black Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected
R-9-Felt 2 122300445-0009G	BUR W/ Foam	Black Fibrous Homogeneous	20% Glass	80% Non-fibrous (Other)	None Detected

Initial report from: 01/25/2023 11:10:18



EMSL Analytical, Inc.

3356 West Catalina Drive Phoenix, AZ 85017

Tel/Fax: (602) 276-4344 / (602) 276-4053

<http://www.EMSL.com> / phoenixlab@emsl.com

EMSL Order: 122300445

Customer ID: BROK78

Customer PO:

Project ID:

Test Report: Asbestos Analysis of Bulk Materials via AHERA Method 40CFR 763 Subpart E Appendix E supplemented with EPA 600/R-93/116 using Polarized Light Microscopy

Sample	Description	Appearance	Non-Asbestos		Asbestos
			% Fibrous	% Non-Fibrous	% Type
R-9-Foam	BUR W/ Foam	Yellow Non-Fibrous Homogeneous		100% Non-fibrous (Other)	None Detected

122300445-0009H

Analyst(s)

Jillian Gessner (31)

Nathan Stancik (22)

Michelle Wilson

Michelle Wilson, Laboratory Manager
or Other Approved Signatory

EMSL maintains liability limited to cost of analysis. Interpretation and use of test results are the responsibility of the client. This report relates only to the samples reported above, and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. The report reflects the samples as received. Results are generated from the field sampling data (sampling volumes and areas, locations, etc.) provided by the client on the Chain of Custody. Samples are within quality control criteria and met method specifications unless otherwise noted. The above analyses were performed in general compliance with Appendix E to Subpart E of 40 CFR (previously EPA 600/M4-82-020 "Interim Method") but augmented with procedures outlined in the 1993 ("final") version of the method. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the federal government. Non-friable organically bound materials present a problem matrix and therefore EMSL recommends gravimetric reduction prior to analysis. Unless requested by the client, building materials manufactured with multiple layers (i.e. linoleum, wallboard, etc.) are reported as a single sample. Estimation of uncertainty is available on request.

Samples analyzed by EMSL Analytical, Inc. Phoenix, AZ NVLAP Lab Code 200811-0, AZ0937, CO AL-19027, CA 2761, TX 300484, HI L-14-004, LA 05113

Initial report from: 01/25/2023 11:10:18

#122300445

PAGE <u>1</u> OF <u>1</u>		SAMPLING DATA & CHAIN OF CUSTODY		TURN-AROUND TIME			
DATE <u>1-18-23</u>		TESTING LAB: <u>EMSL</u>		☐ 6 HRS. ☐ 24HRS. ☐ 48HRS. ☒ 72HRS. ☐ 10 Days ☐ :			
BILL TO:		PROJECT INFORMATION			EMAIL RESULTS TO: <u>Lab@ppeng.com</u>		
 T. BROOKS & ASSOCIATES A Division of PROVOST & PRITCHARD CONSULTING GROUP		PROJECT NAME: <u>ROOSEVELT ELEM SCHOOL</u>			ANALYSIS		
		ADDRESS: <u>2324 VERDE ST, BAKERSFIELD</u>			☒ PLM STANDARD ☐ LEAD PAINT		
		PROJECT # <u>02854-22-002</u>			D = Drywall, TM = Taping Mud, T = Texture, CB&A = Cove Base Adhesive		
		CONTACT ☒ TROY B. ☐ TIM T. ☐ TREVOR B. ☐ EG F.			VFT = Vinyl Floor Tile, VSF = Vinyl Sheet Flooring, CM = Carpet Mastic,		
MOBIL # (559)		287-8357 284-5573 301-2568 360-3694			12-120F CT = Ceiling Tile, ACS = Spray-on Acoustical Ceiling Material.		

SAMPLE #	SAMPLE DESCRIPTION	SAMPLE LOCATION	W-Wall C-Ceiling F-Floor	Condition (Good, Fair, Poor)	S-Surfacing T- Thermal M-Misc.	F - Friable NF - Non Friable	Quantity
R-1	Built-up Roof w/ Foam	multi-purpose corridor	R				
R-2	Built-up Roof w/ Foam	Library	u				
R-3	BUR w/ Foam	MPR	u				
R-4	BUR w/ Foam	BLDG B	u				
R-5	BUR w/ Foam	BLDG C	u				
R-6	BUR w/ Foam	BLDG ^{corridor} E - EAST	u				
R-7	BUR w/ Foam	BLDG D	u				
R-8	BUR w/ Foam	w. Corridor	u				
R-9	BUR w/ Foam	BLDG E	u				

TRANSACTIONS		TRANSACTIONS		SHIPPING PAID BY :	
(RELINQUISHED BY SIGNATURE)	DATE: <u>1-18-23</u>	(APPROVED BY SIGNATURE)	DATE: <u>1/18/23</u>	LAB ☒	
(RELINQUISHED BY SIGNATURE)	DATE: <u>1-18-23</u>	(APPROVED BY SIGNATURE)	DATE: <u>1040</u>	CLIENT <u> </u>	
			BROOKS <u> </u>		

7965 45194811


Appendix B

Site Plans Indicating Asbestos Sample Locations, Lead Sampling Orientation & Positive Lead-Based Paint Reading Locations

3/4/2023 11:39 AM C:\Bakersfield City School District\2854\28542202 Roosevelt Elementary School\Drawings\Building A.dwg - Civil.dwg

(B)

(D)

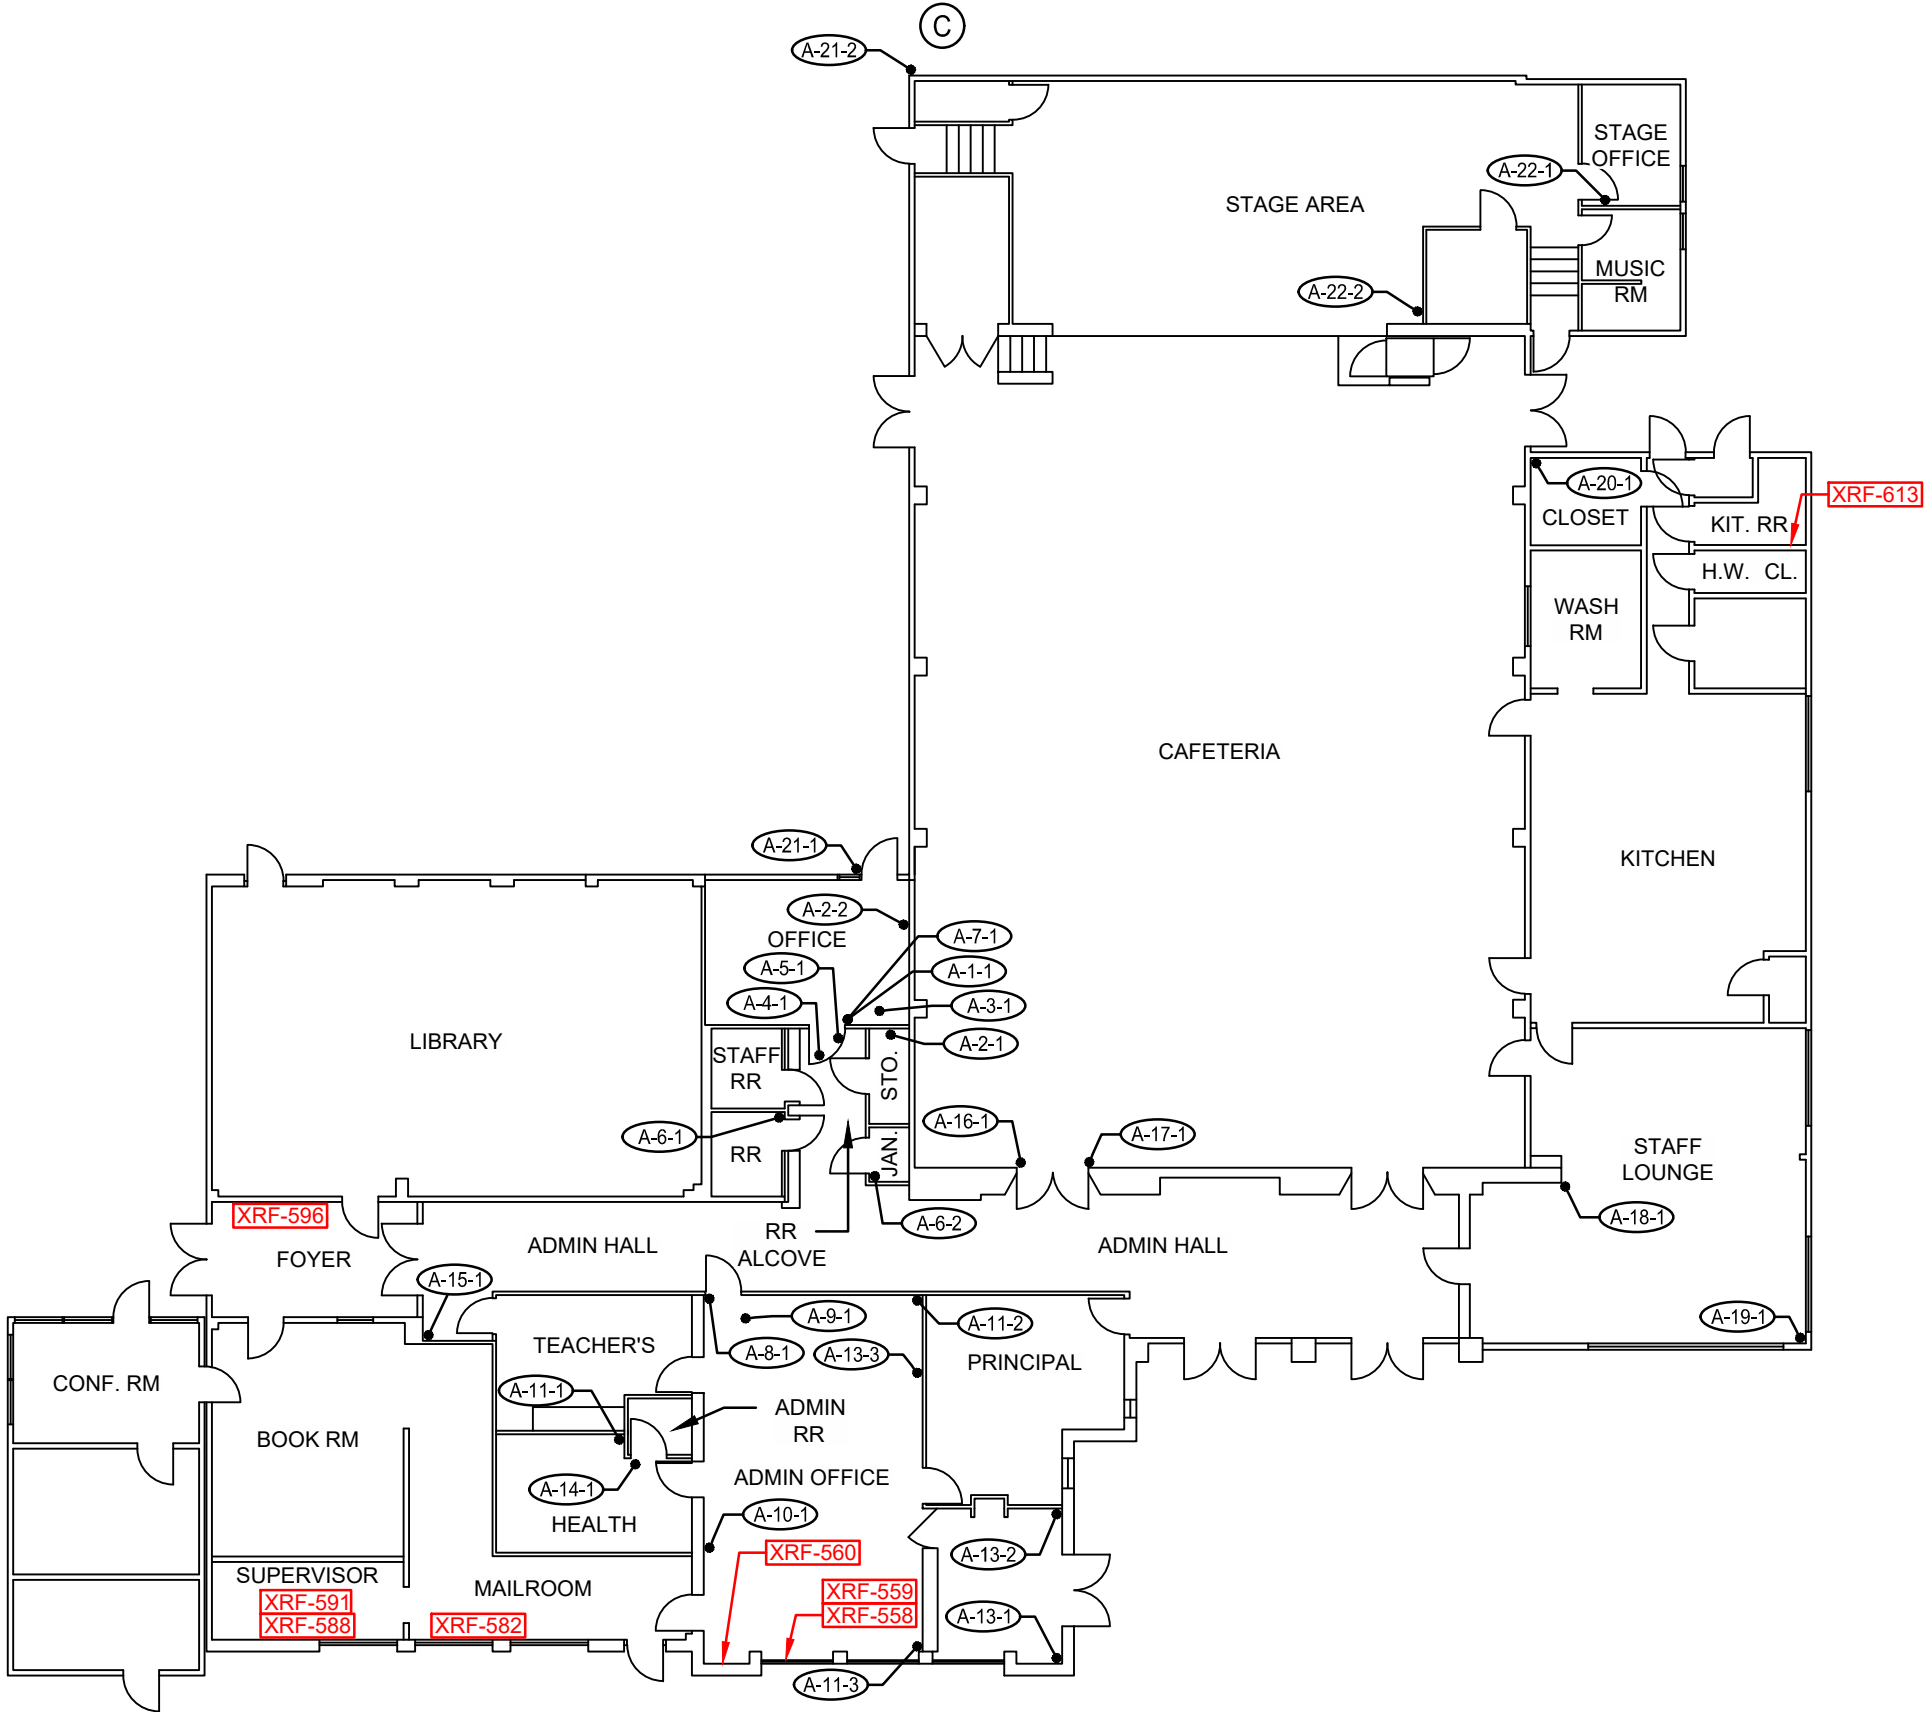

(A) DENOTES SIDE REFERENCE

XRF-## DENOTES POSITIVE LEAD SAMPLE

(##) DENOTES ASBESTOS SAMPLE

(##) DENOTES POSITIVE ASBESTOS SAMPLE

(A)



EST. 1968
PROVOST & PRITCHARD
CONSULTING GROUP
An Employee Owned Company


ROOSEVELT ELEMENTARY SCHOOL - BUILDING A

2324 VERDE STREET
BAKERSFIELD, CA

BAKERSFIELD CITY SCHOOL DISTRICT

DRAWN BY:
TREVOR BROOKS
DATE: 1/17/23 - 1/18/23
JOB NO: 02854-22-002
1 OF 9

2/24/2023 4:46 PM C:\Bakersfield City School District\2854\28542202 Roosevelt Elementary School\Drawings\Building B.dwg - Civil.dwg

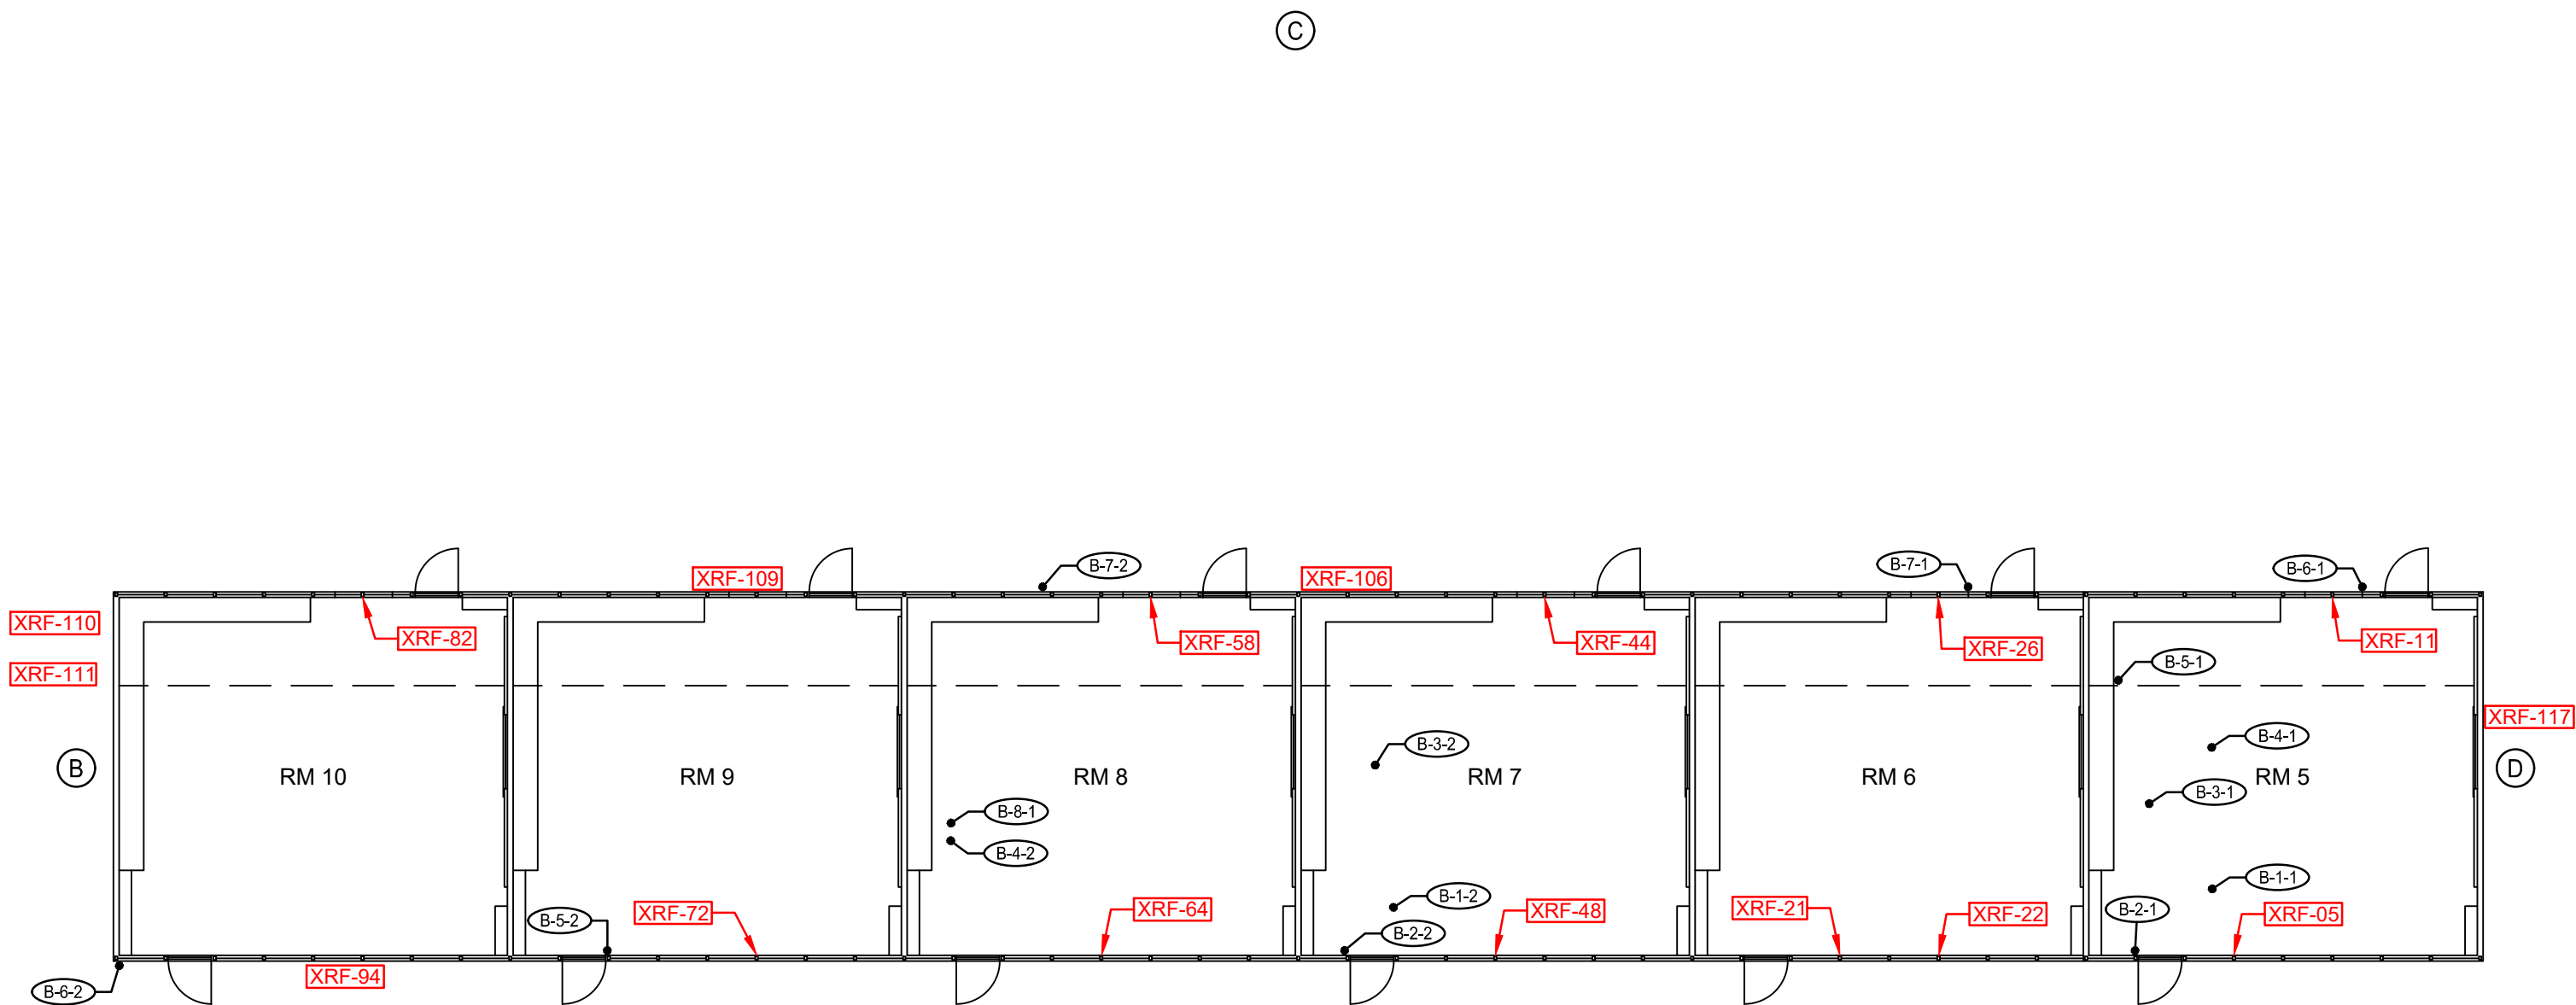


(A) DENOTES SIDE REFERENCE

XRF-## DENOTES POSITIVE LEAD SAMPLE

(#-##) DENOTES ASBESTOS SAMPLE

(#-##) DENOTES POSITIVE ASBESTOS SAMPLE

(A)



EST. 1968
PROVOST & PRITCHARD
CONSULTING GROUP
An Employee Owned Company

ROOSEVELT ELEMENTARY SCHOOL - BUILDING B


2324 VERDE STREET
BAKERSFIELD, CA

BAKERSFIELD CITY SCHOOL DISTRICT

DRAWN BY:
TREVOR BROOKS
DATE: 1/17/23 - 1/18/23
JOB NO: 02854-22-002

2 OF 9

(C)

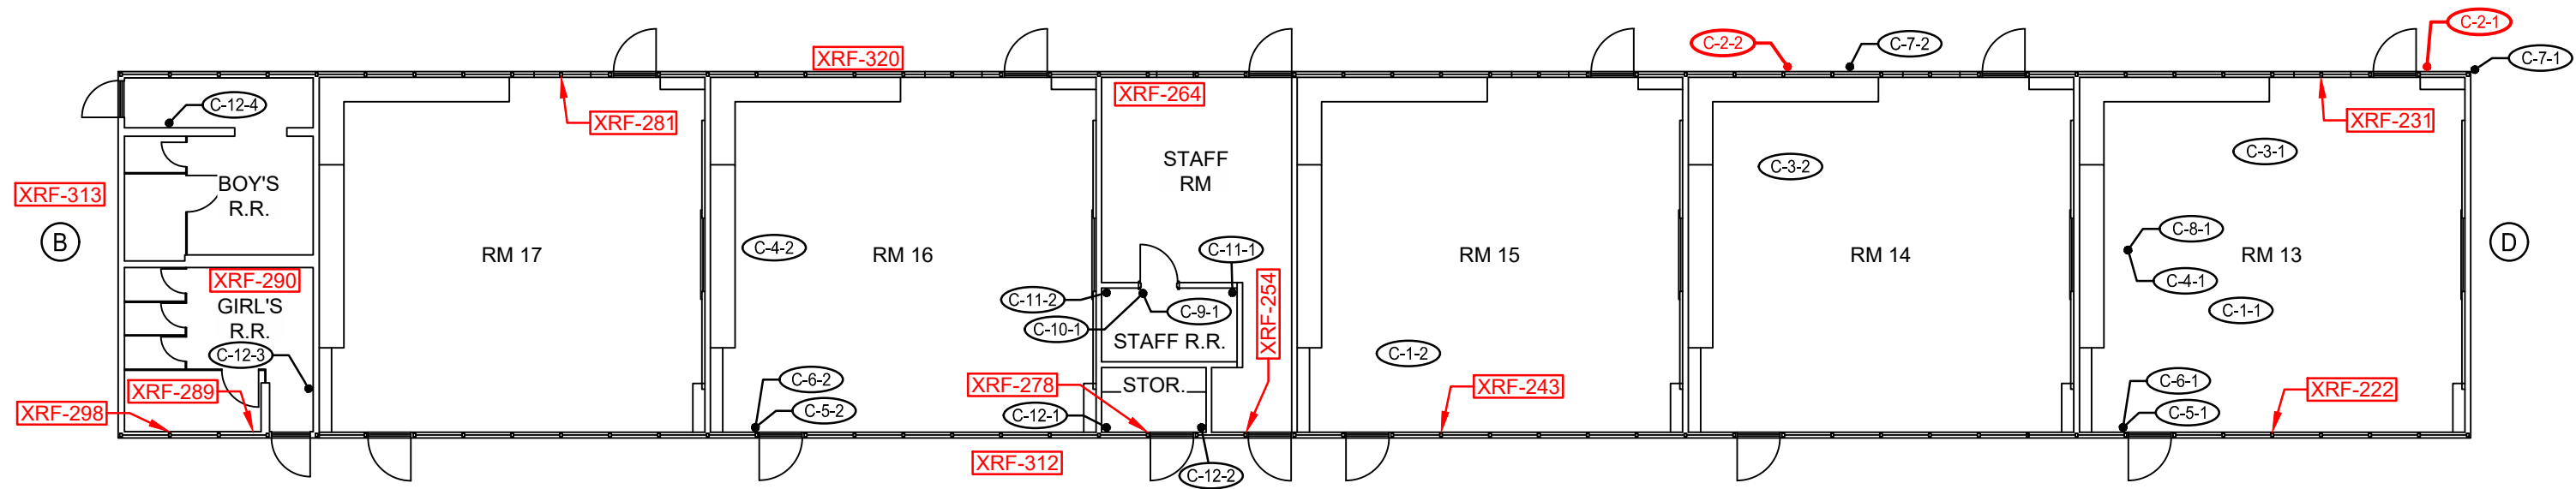


(A) DENOTES SIDE REFERENCE

XRF-## DENOTES POSITIVE LEAD SAMPLE

DENOTES ASBESTOS SAMPLE

DENOTES POSITIVE ASBESTOS SAMPLE

(A)



ROOSEVELT ELEMENTARY SCHOOL - BUILDING C

2324 VERDE STREET
BAKERSFIELD, CA

BAKERSFIELD CITY SCHOOL DISTRICT

DRAWN BY:
TREVOR BROOKS


DATE: 1/17/23 -1/18/23

JOB NO: 02854-22-002

3 OF 9

2/24/2023 4:38 PM C:\Bakersfield City School District\2854\22\02\2023 Roosevelt Elementary School\Drawings\Building C.dwg - Child Page

©

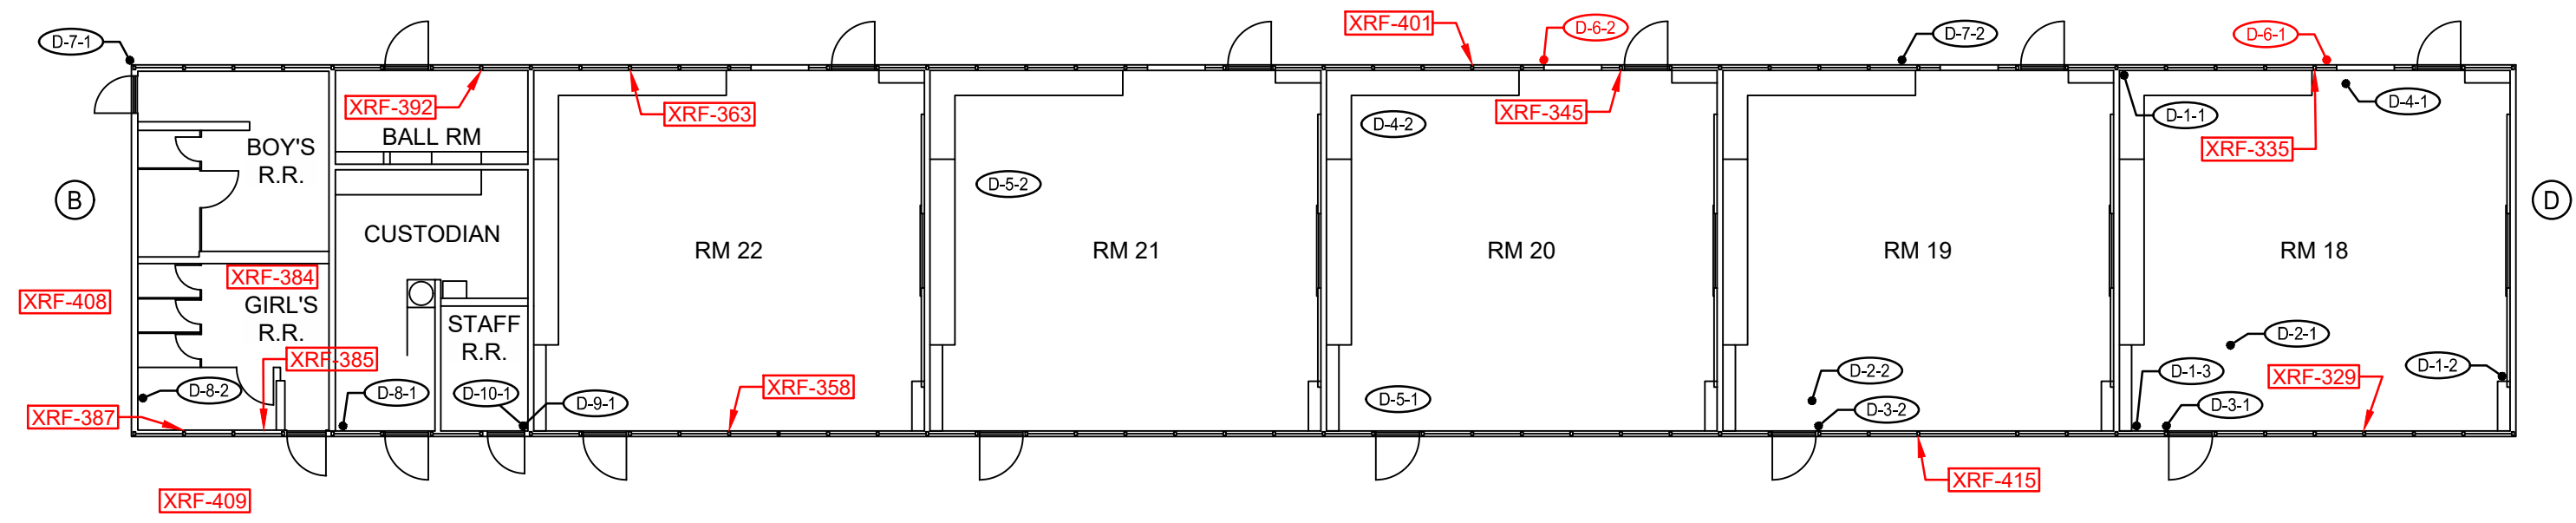


Ⓐ DENOTES SIDE REFERENCE

XRF-## DENOTES POSITIVE LEAD SAMPLE

DENOTES ASBESTOS SAMPLE

Ⓢ### DENOTES POSITIVE ASBESTOS SAMPLE

Ⓐ



EST. 1968
PROVOST & PRITCHARD
CONSULTING GROUP
An Employee Owned Company

ROOSEVELT ELEMENTARY SCHOOL - BUILDING D


2324 VERDE STREET
BAKERSFIELD, CA

BAKERSFIELD CITY SCHOOL DISTRICT

DRAWN BY: TREVOR BROOKS
DATE: 1/17/23 -1/18/23
JOB NO: 02854-22-002
4 OF 9

2/24/2023 4:38 PM C:\Bakersfield City School District\2854\22\022023 Roosevelt Elementary School\Drawings\Building D.dwg - Child Page

Ⓒ

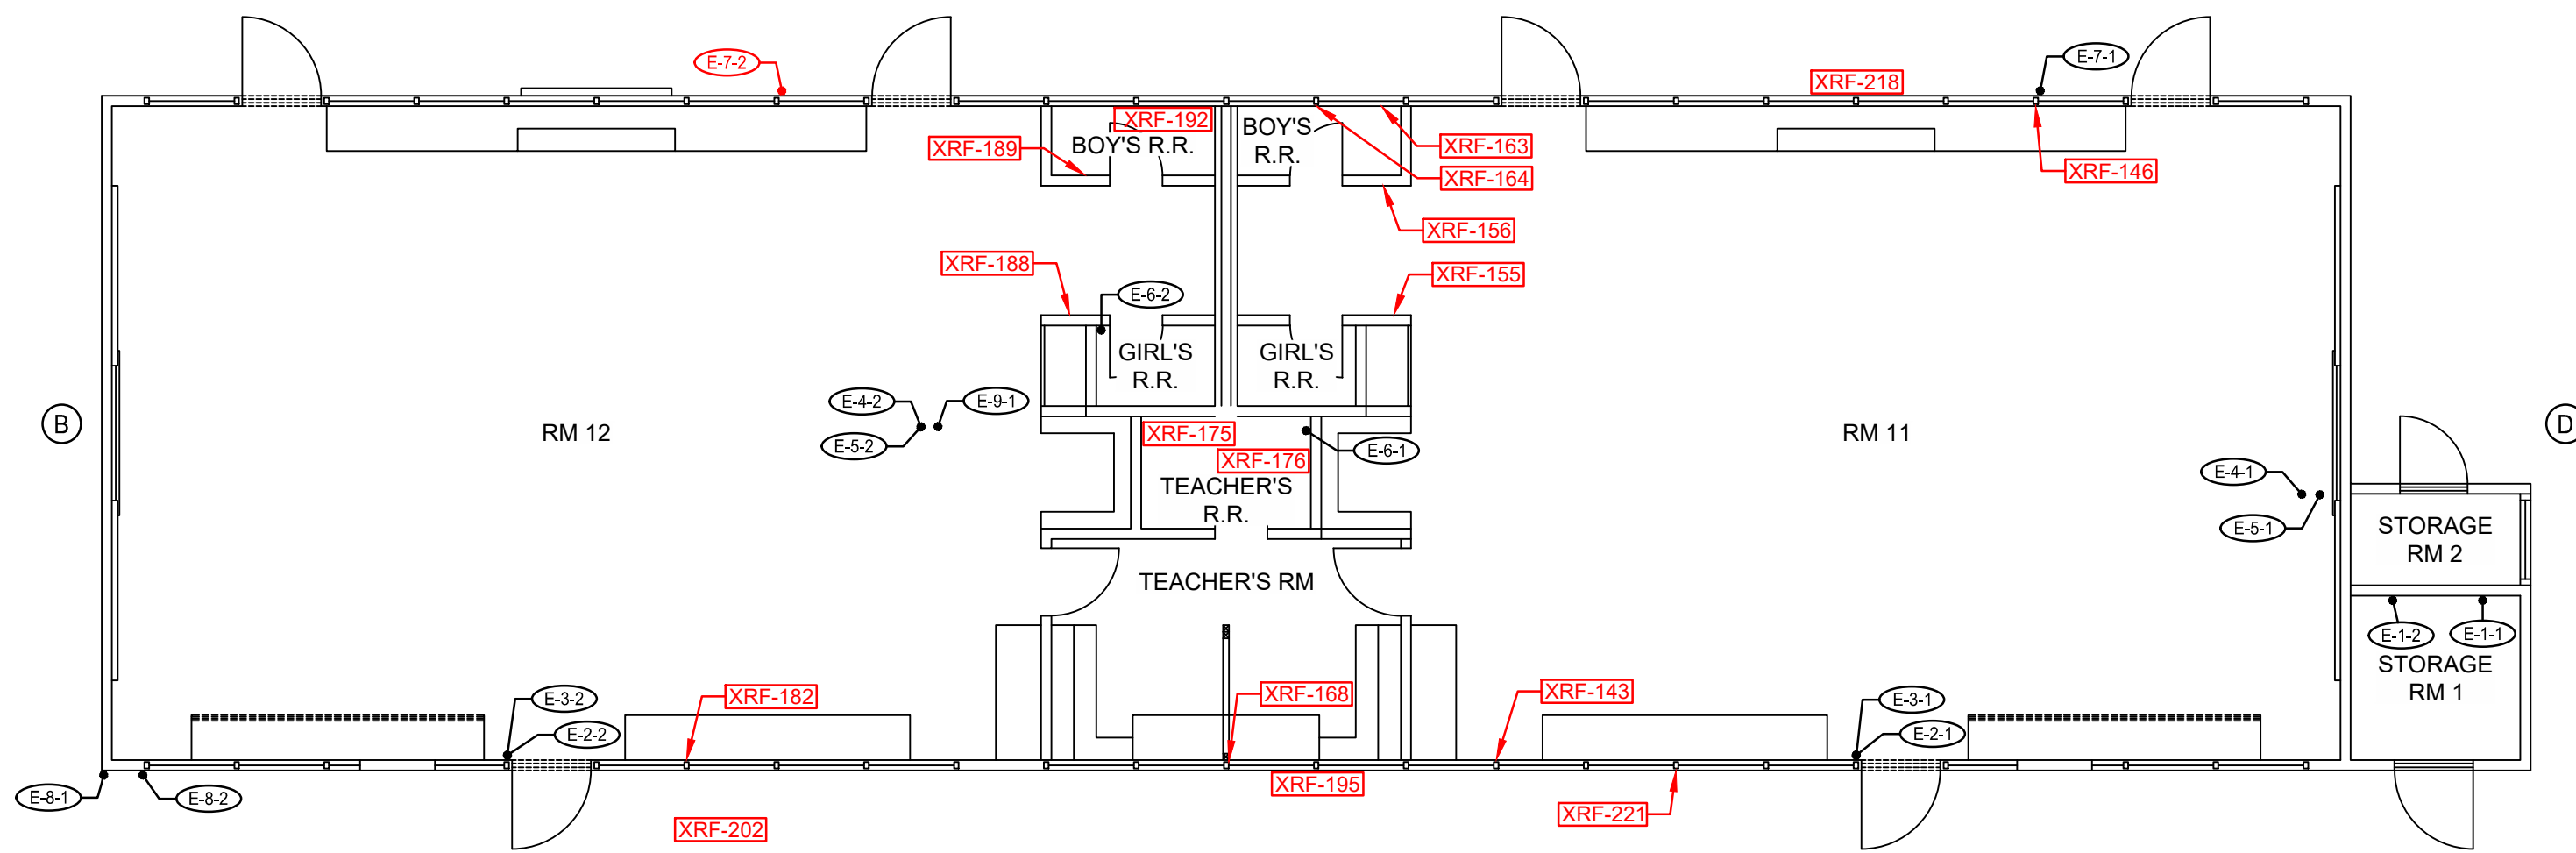


Ⓐ DENOTES SIDE REFERENCE

XRF-## DENOTES POSITIVE LEAD SAMPLE

DENOTES ASBESTOS SAMPLE

DENOTES POSITIVE ASBESTOS SAMPLE

Ⓐ



EST. 1968
PROVOST & PRITCHARD
CONSULTING GROUP
An Employee Owned Company

ROOSEVELT ELEMENTARY SCHOOL - BUILDING E




2324 VERDE STREET
BAKERSFIELD, CA

BAKERSFIELD CITY SCHOOL DISTRICT

DRAWN BY:
TREVOR BROOKS
DATE: 1/17/23 - 1/18/23
JOB NO: 02854-22-002

2/24/2023 4:17 PM C:\Bakersfield City School District\2024\02854\2023 Roosevelt Elementary School\Drawings\Building E.dwg - Civil.dwg

2/24/2023 4:38 PM C:\Bakersfield City School District\2854\28542202 Roosevelt Elementary School\Drawings\Building R1-R2 & R8.dwg - Chilli Pang

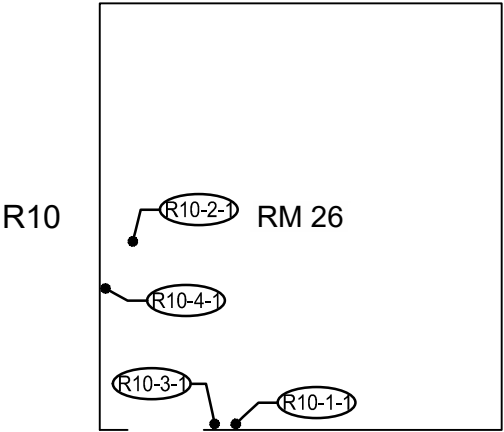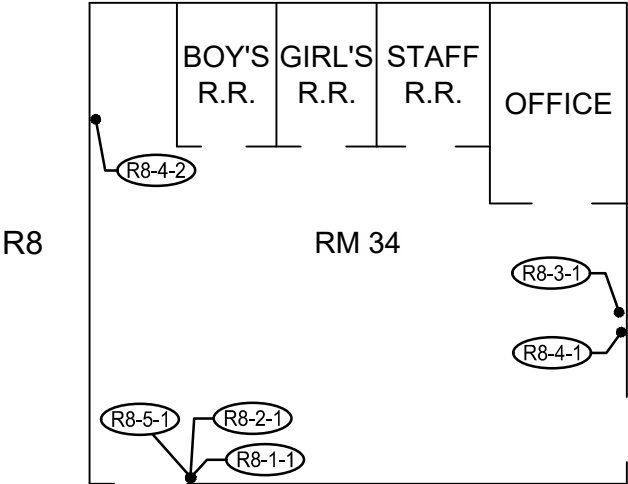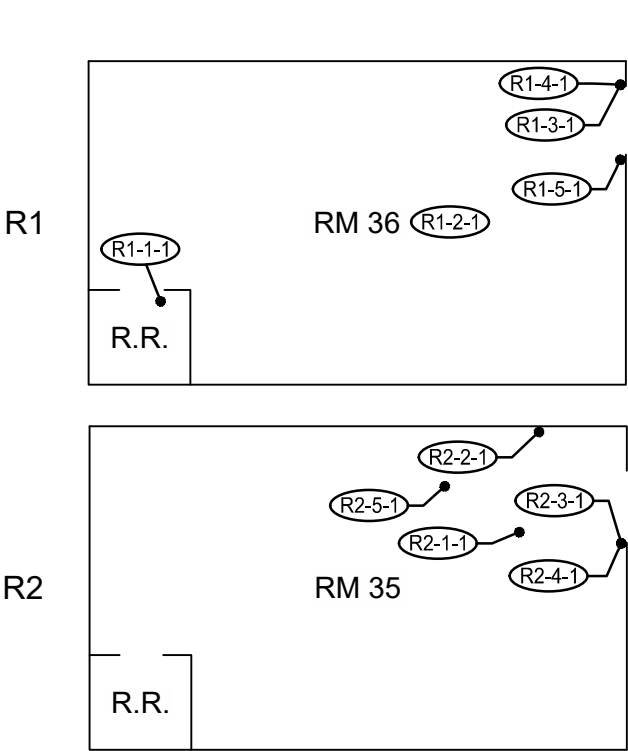

(A) DENOTES SIDE REFERENCE

XRF-## DENOTES POSITIVE LEAD SAMPLE

DENOTES ASBESTOS SAMPLE

DENOTES POSITIVE ASBESTOS SAMPLE

(A)

(C)

(D)



EST. 1968
PROVOST & PRITCHARD
CONSULTING GROUP
An Employee Owned Company

ROOSEVELT ELEMENTARY SCHOOL - BUILDINGS R1-R2, R8, & R10


2324 VERDE STREET
BAKERSFIELD, CA

BAKERSFIELD CITY SCHOOL DISTRICT

DRAWN BY:
TREVOR BROOKS
DATE: 1/17/23 -1/18/23
JOB NO: 02854-22-002

6 OF 9

2/24/2023 4:38 PM C:\Bakersfield City School District\2854\28542202 Roosevelt Elementary School\Drawings\Building R3-R4.dwg, C:\Bakersfield City School District\2854\28542202 Roosevelt Elementary School\Drawings\Building R3-R4.dwg, C:\Bakersfield City School District\2854\28542202 Roosevelt Elementary School\Drawings\Building R3-R4.dwg, C:\Bakersfield City School District\2854\28542202 Roosevelt Elementary School\Drawings\Building R3-R4.dwg

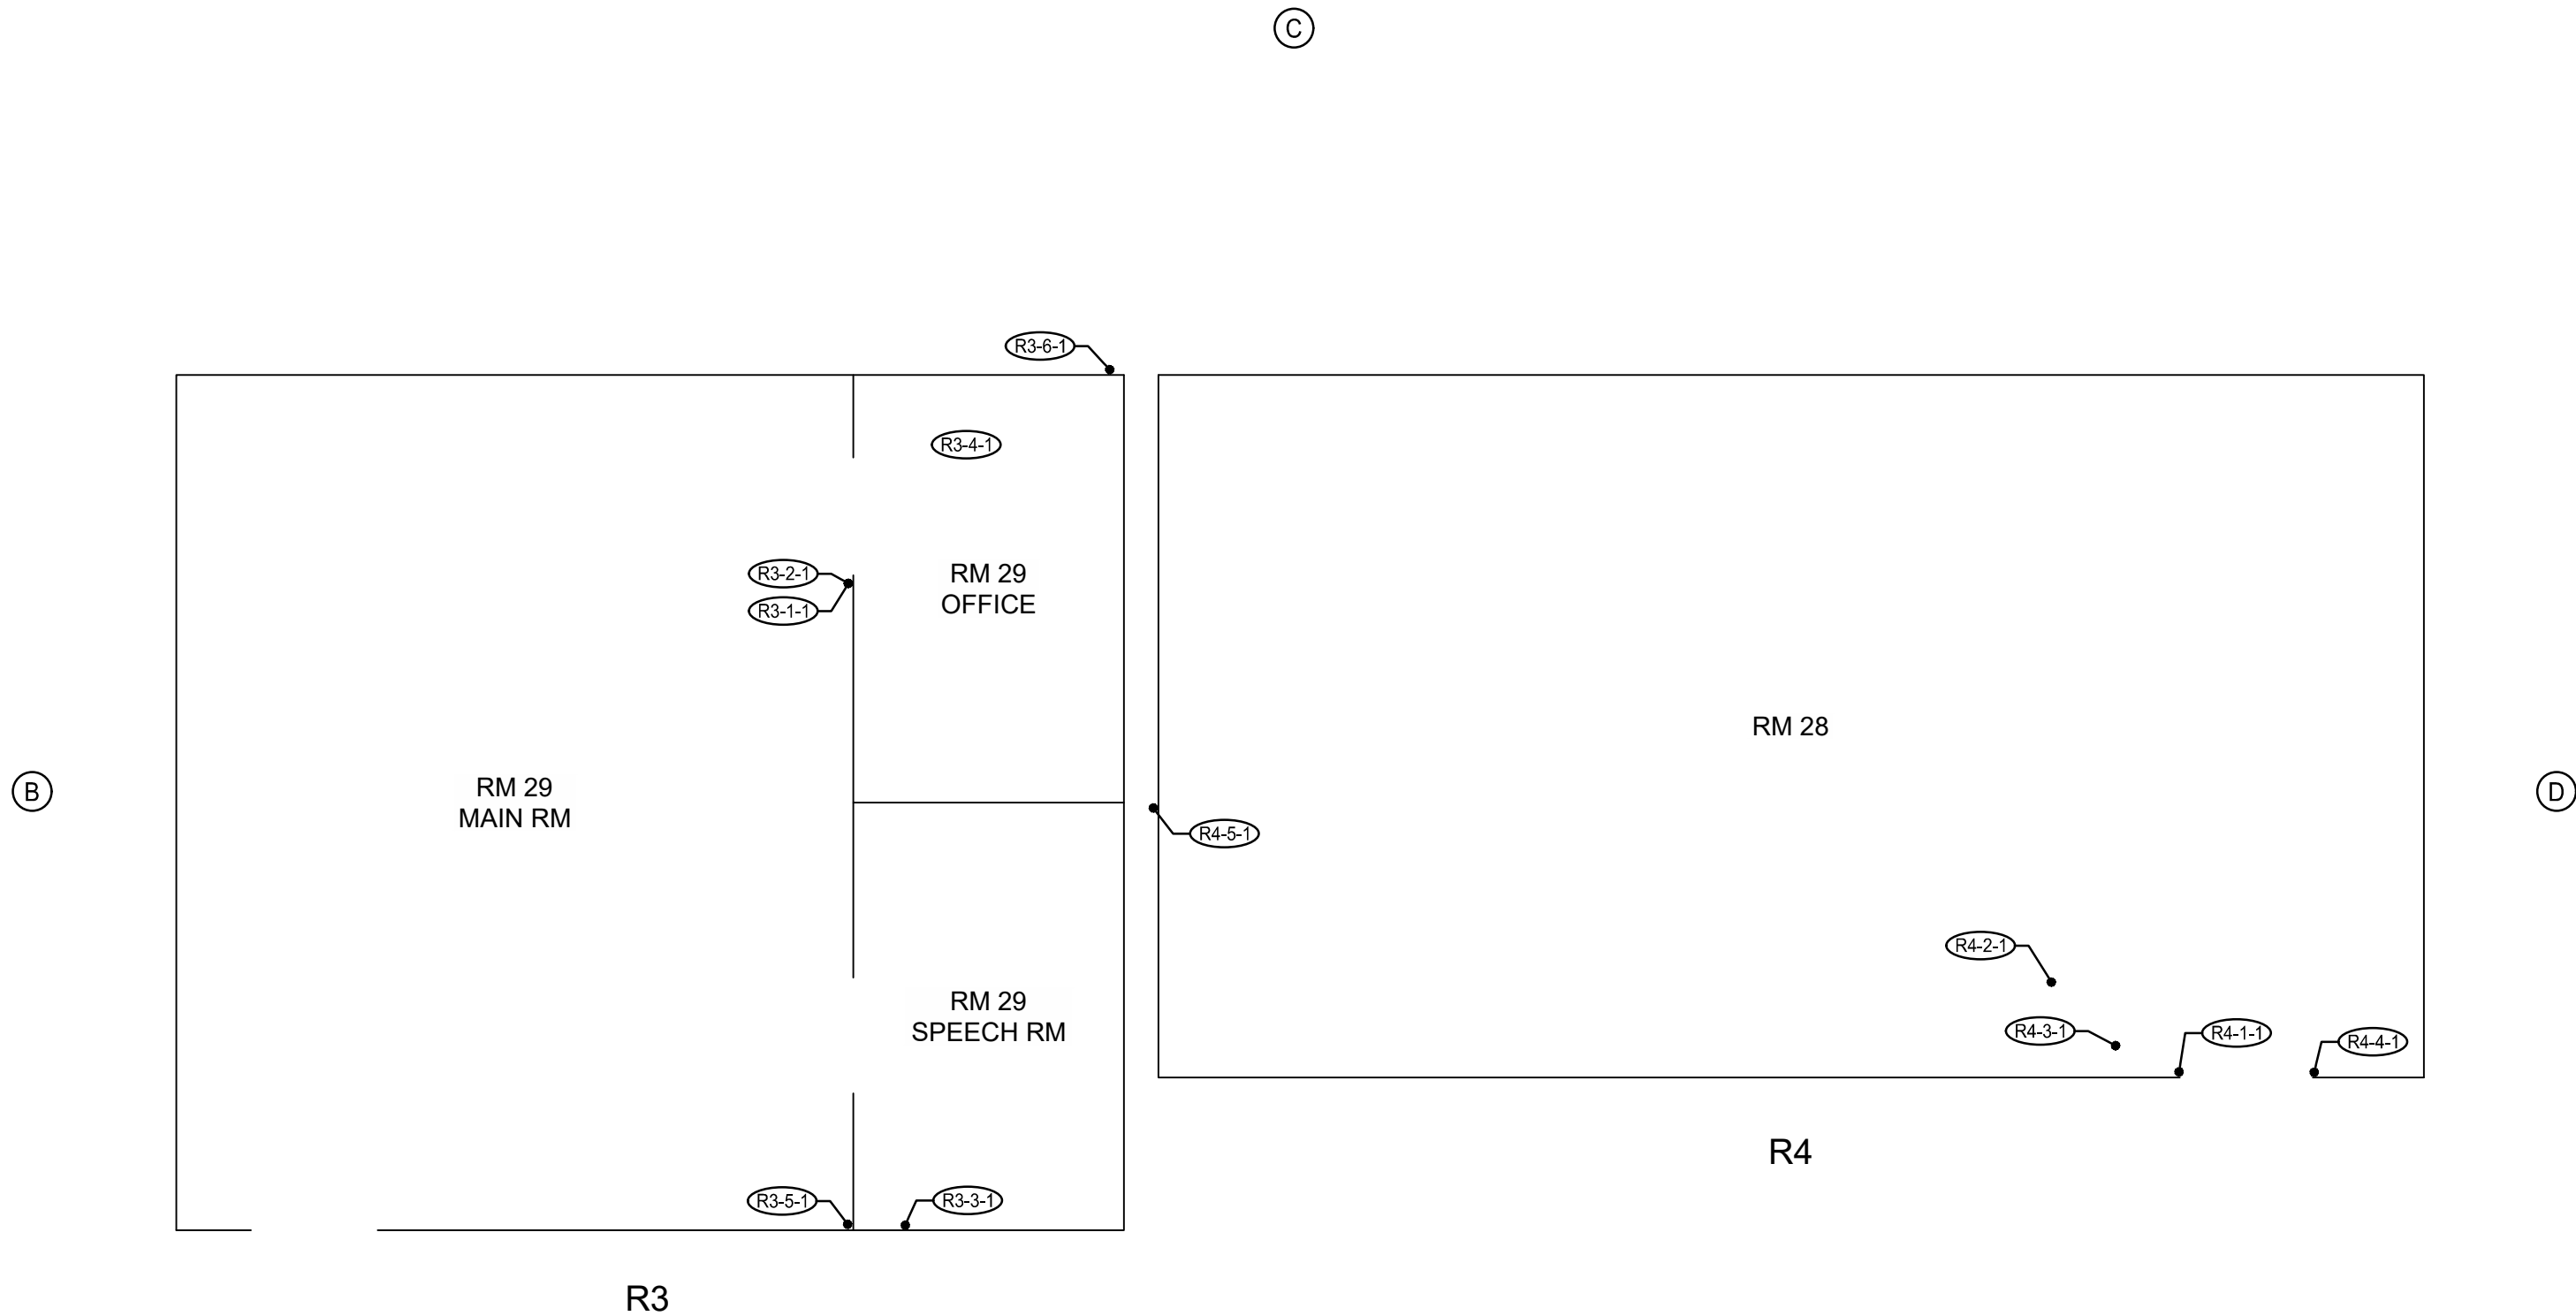


(A) DENOTES SIDE REFERENCE

XRF-## DENOTES POSITIVE LEAD SAMPLE

DENOTES ASBESTOS SAMPLE

DENOTES POSITIVE ASBESTOS SAMPLE



EST. 1968
PROVOST & PRITCHARD
CONSULTING GROUP
An Employee Owned Company

ROOSEVELT ELEMENTARY SCHOOL - BUILDING R3-R4


2324 VERDE STREET
BAKERSFIELD, CA

BAKERSFIELD CITY SCHOOL DISTRICT

DRAWN BY:
TREVOR BROOKS
DATE: 1/17/23 -1/18/23
JOB NO: 02854-22-002

7 OF 9

2/24/2023 4:39 PM C:\Bakersfield City School District\2854\28542202 Roosevelt Elementary School\Drawings\Building R5-R7.dwg, C:\Bakersfield City School District\2854\28542202 Roosevelt Elementary School\Drawings\Building R5-R7.dwg, C:\Bakersfield City School District\2854\28542202 Roosevelt Elementary School\Drawings\Building R5-R7.dwg

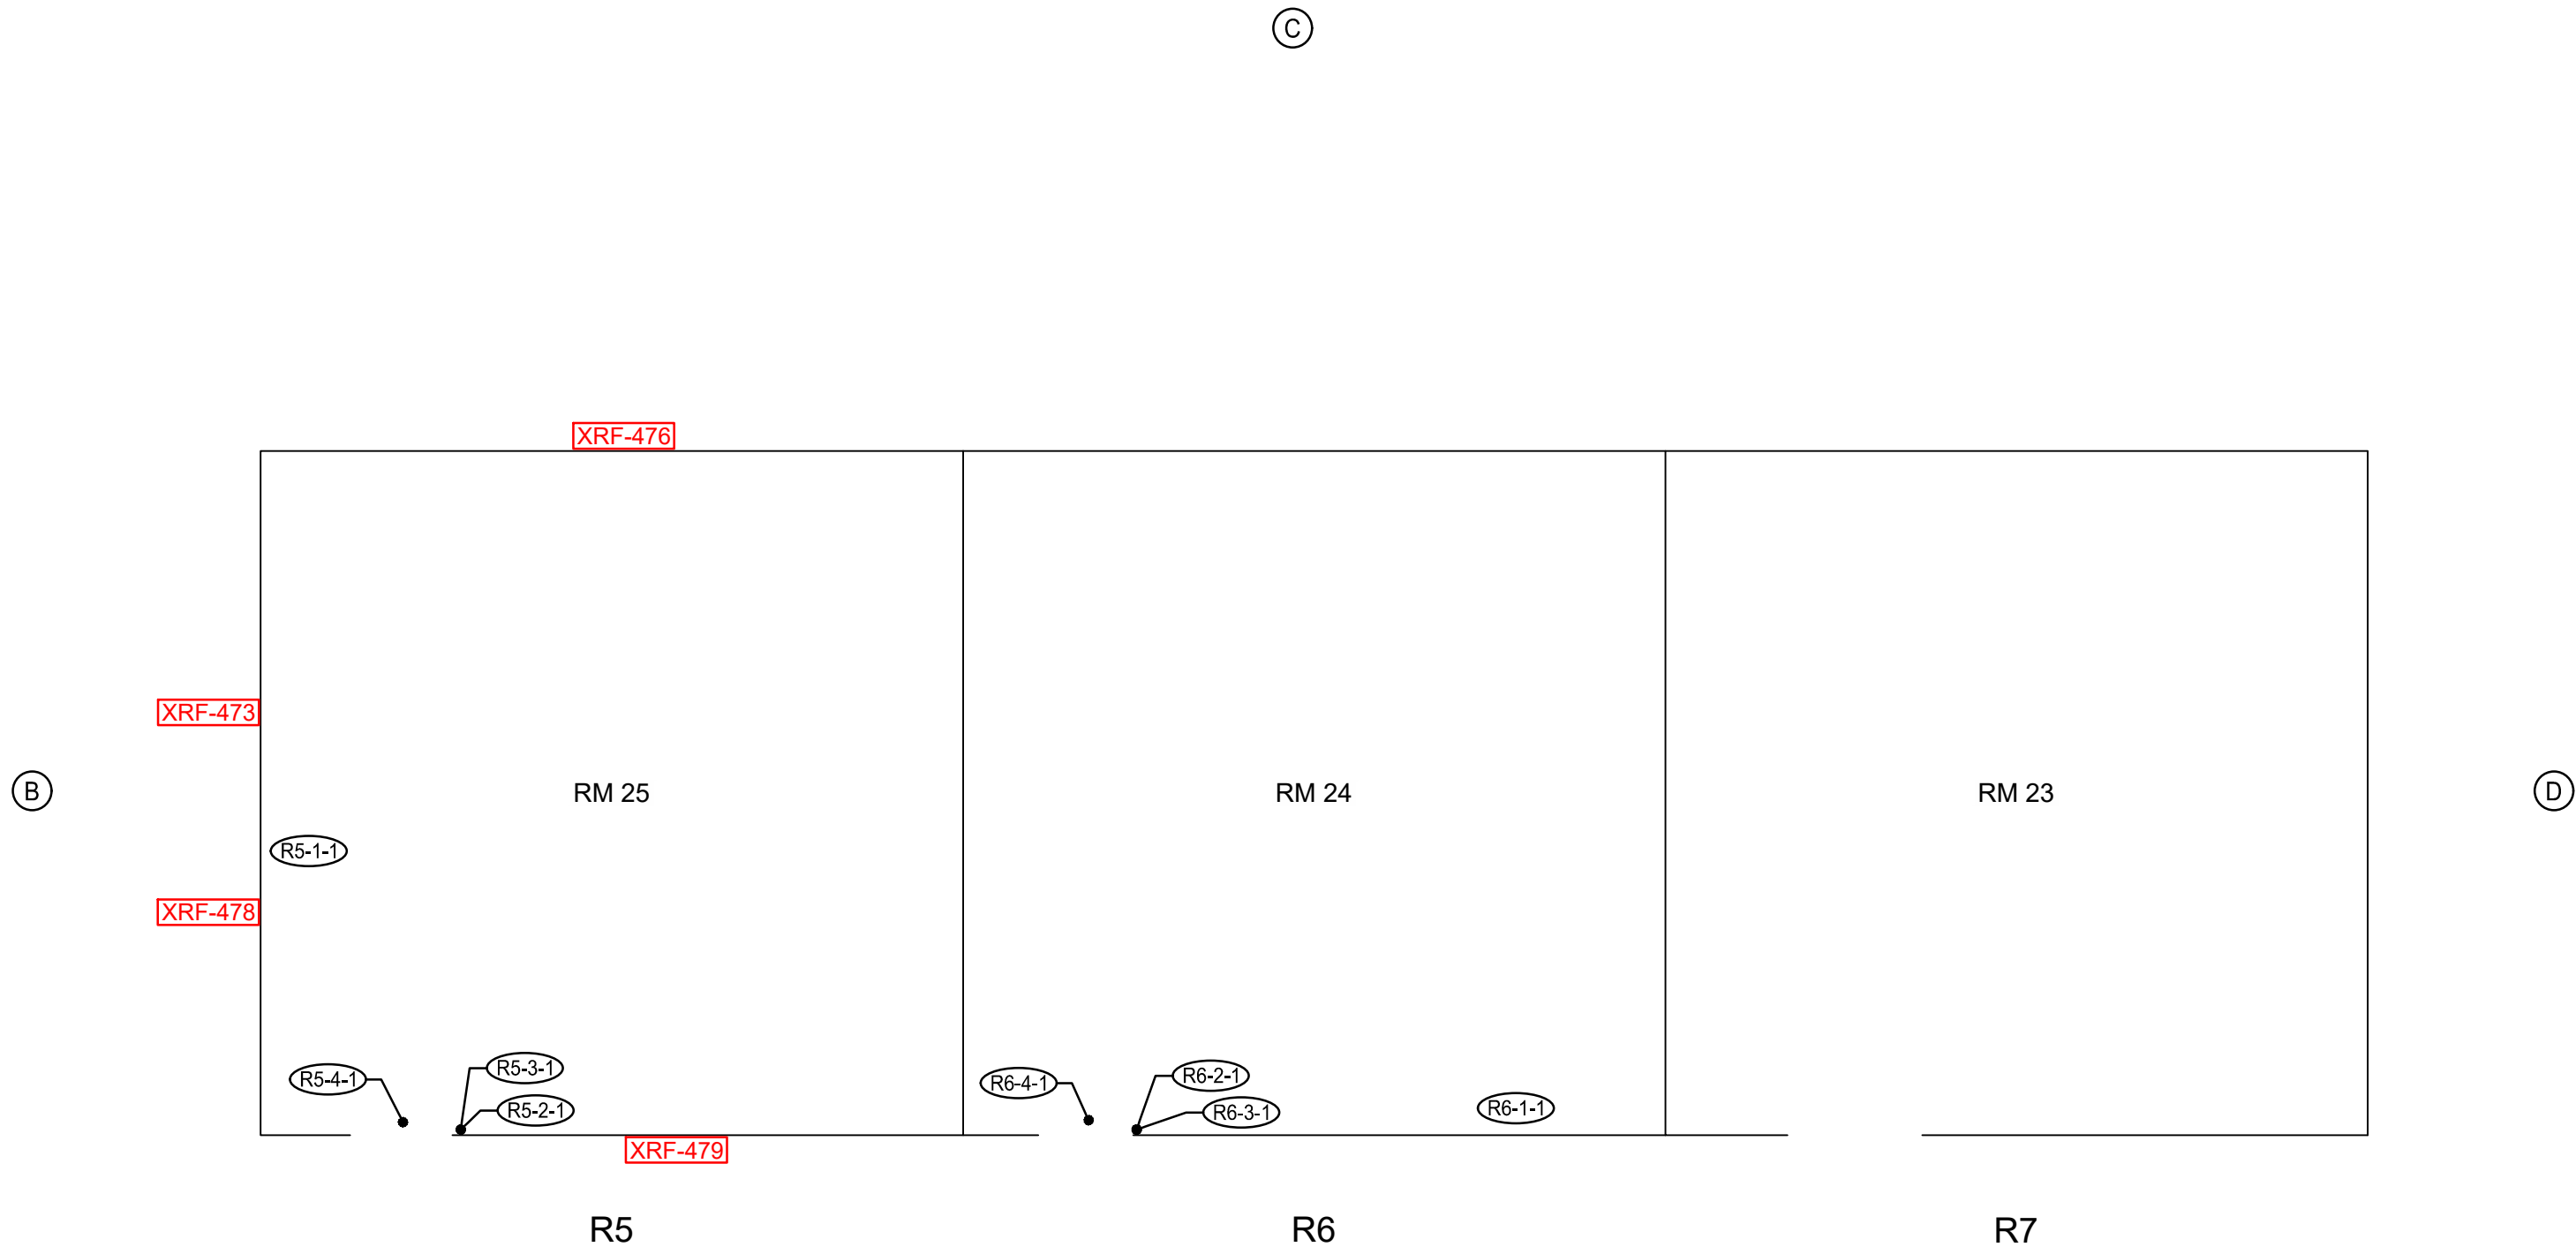


(A) DENOTES SIDE REFERENCE

XRF-## DENOTES POSITIVE LEAD SAMPLE

DENOTES ASBESTOS SAMPLE

DENOTES POSITIVE ASBESTOS SAMPLE

(A)



EST. 1968
PROVOST & PRITCHARD
CONSULTING GROUP
An Employee Owned Company

ROOSEVELT ELEMENTARY SCHOOL - BUILDING R5-R7


2324 VERDE STREET
BAKERSFIELD, CA

BAKERSFIELD CITY SCHOOL DISTRICT

DRAWN BY:
TREVOR BROOKS
DATE: 1/17/23 -1/18/23
JOB NO: 02854-22-002

8 OF 9

2/24/2023 4:00 PM C:\Bakersfield City School District\2854\02542202 Roosevelt Elementary School\Drawings\Building R9.dwg, Chiala Perra

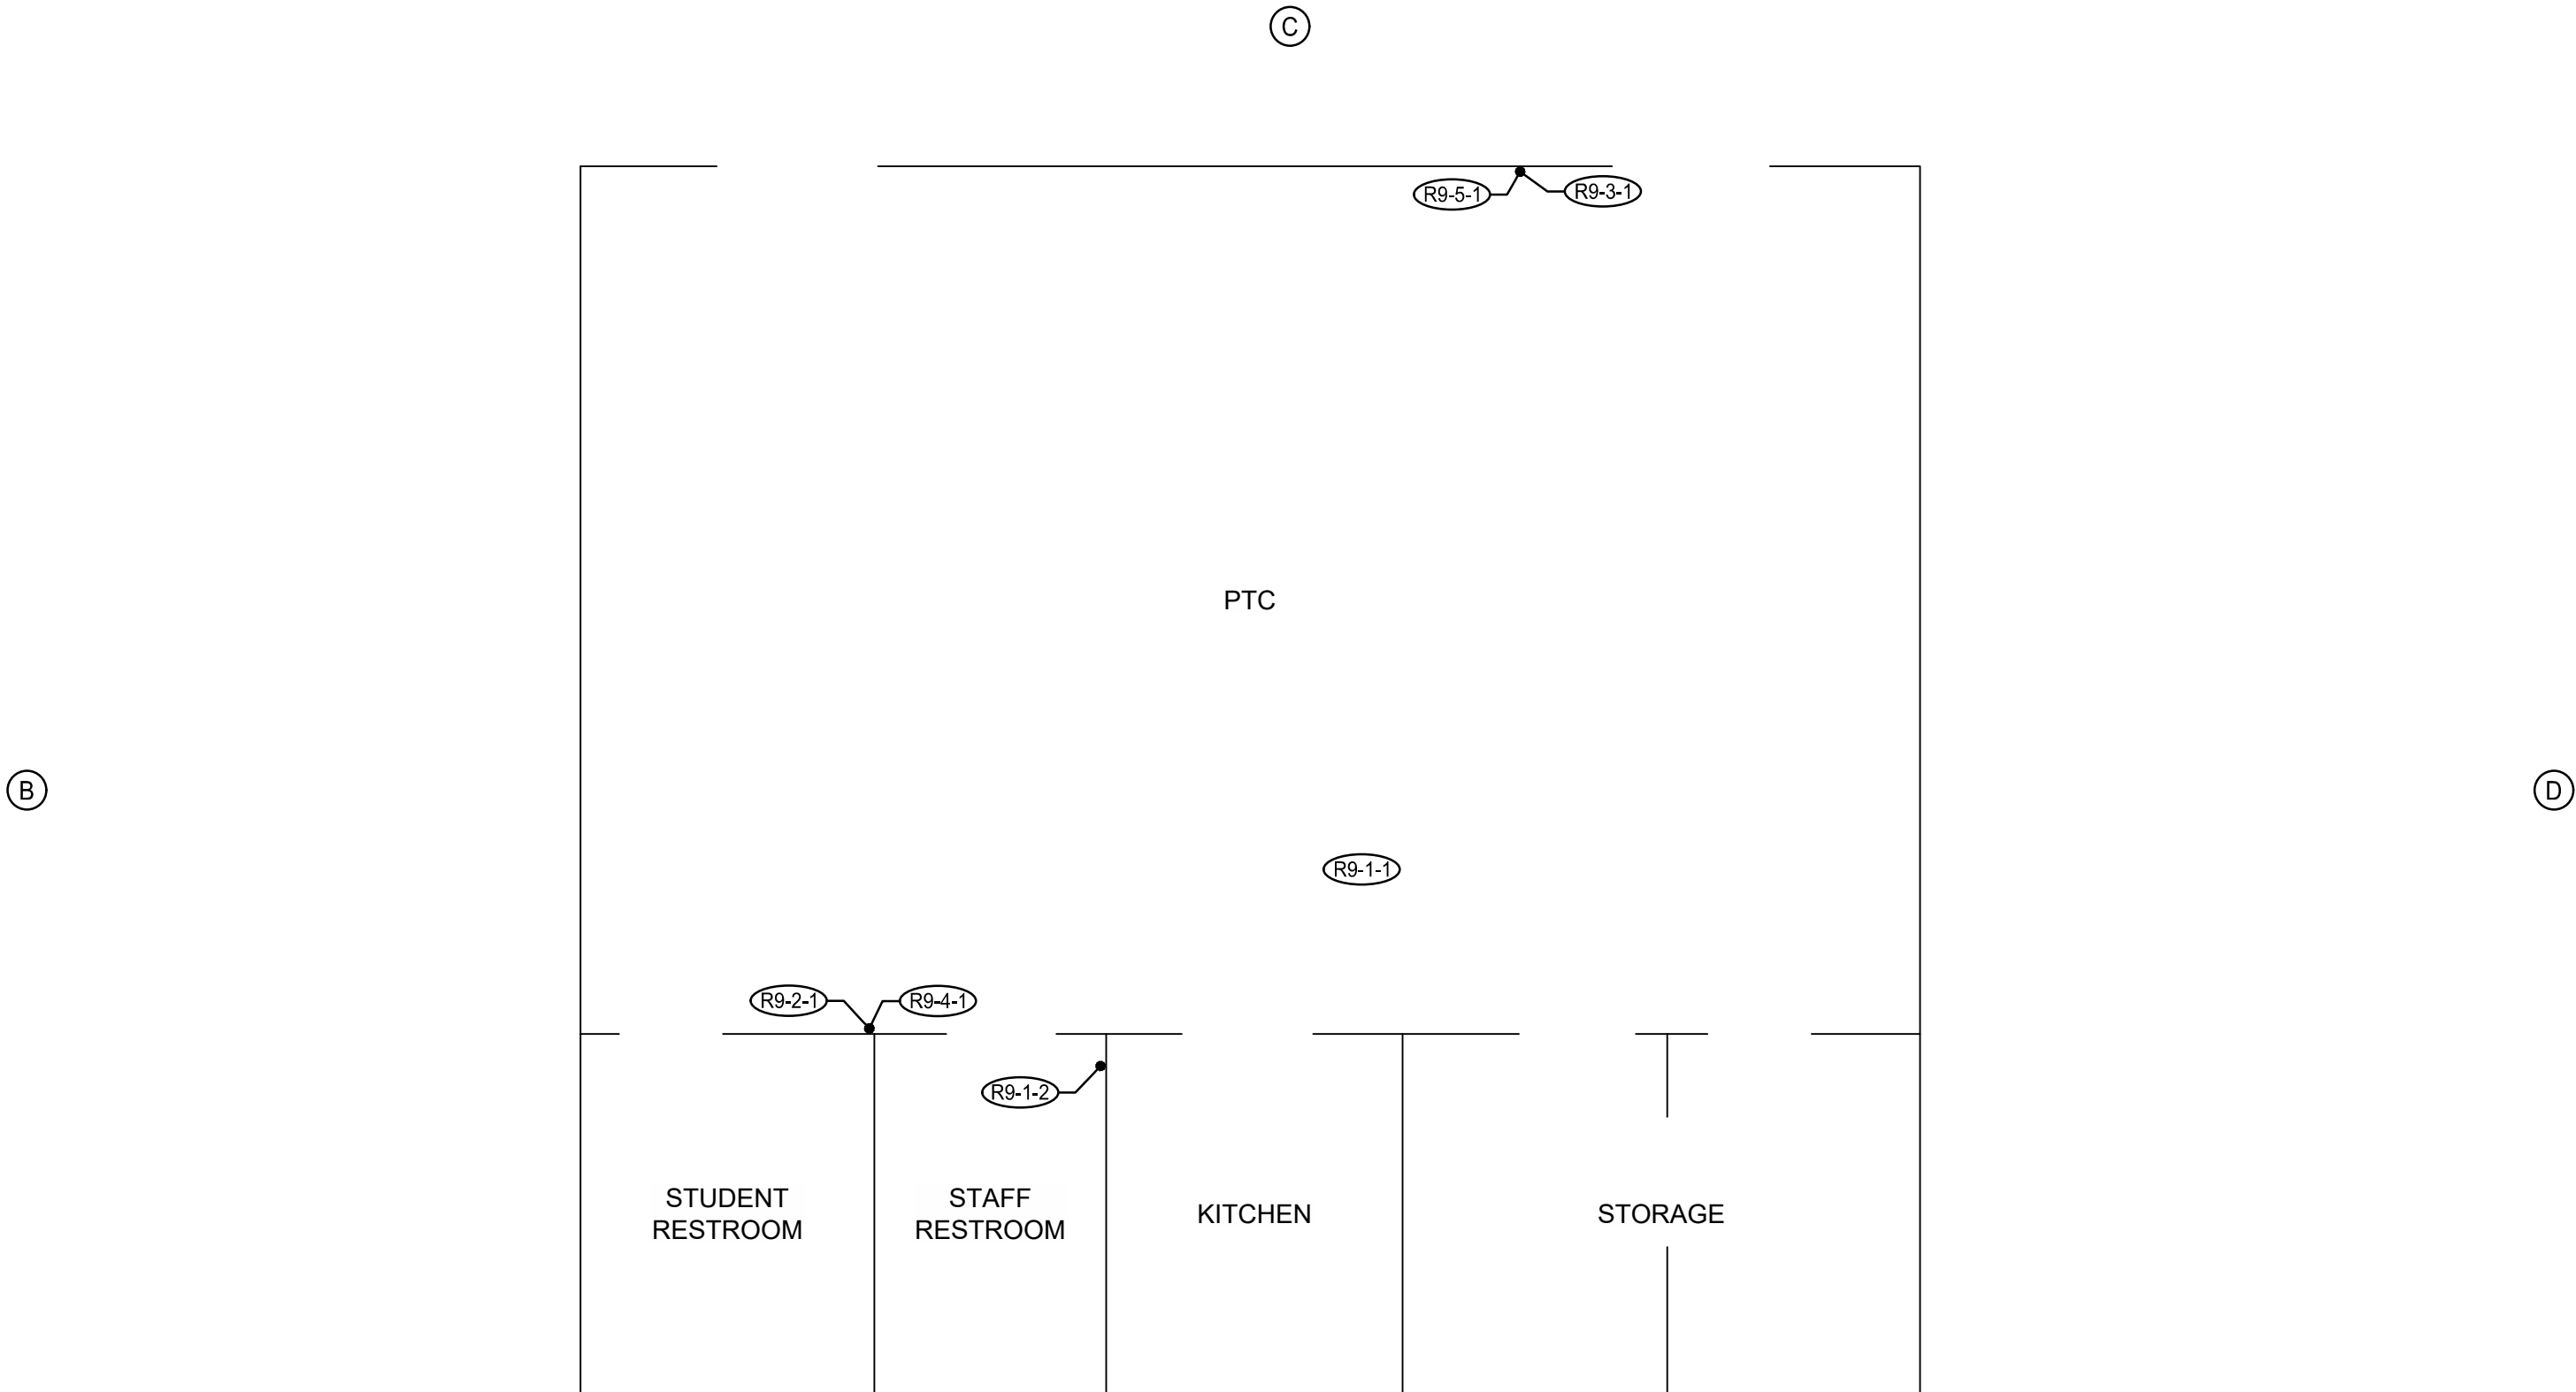


(A) DENOTES SIDE REFERENCE

XRF-## DENOTES POSITIVE LEAD SAMPLE

DENOTES ASBESTOS SAMPLE

DENOTES POSITIVE ASBESTOS SAMPLE

(A)



ROOSEVELT ELEMENTARY SCHOOL - BUILDING R9

2324 VERDE STREET
BAKERSFIELD, CA

BAKERSFIELD CITY SCHOOL DISTRICT

DRAWN BY:
TREVOR BROOKS

DATE: 1/17/23 - 1/18/23

JOB NO: 02854-22-002

9 OF 9

Appendix C

XRF Results for Lead All Readings

LEAD-BASED PAINT INSPECTION

ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
1	1.00	0.20	Positive	5.00	1/17/2023	17:09:54				CALIBRATION - FRONT			
2	1.00	0.20	Positive	5.00	1/17/2023	17:10:22				CALIBRATION - FRONT			
3	1.10	0.20	Positive	5.00	1/17/2023	17:10:49				CALIBRATION - FRONT			
4	0.20	0.30	Negative	2.00	1/17/2023	17:18:17	Bldg B	Room #5	A	Window Case	Metal	Intact	Beige
5	2.60	0.30	Positive	2.00	1/17/2023	17:19:11	Bldg B	Room #5	A	Column	Concrete	Intact	Gray
6	0.10	0.30	Negative	2.00	1/17/2023	17:19:32	Bldg B	Room #5	A	Window Sill	Wood	Intact	Gray
7	0.10	0.30	Negative	2.00	1/17/2023	17:20:01	Bldg B	Room #5	A	Mullions	Metal	Intact	Gray
8	0.10	0.30	Negative	2.00	1/17/2023	17:20:38	Bldg B	Room #5	C	Mullions	Metal	Intact	Gray
9	0.20	0.30	Negative	2.00	1/17/2023	17:21:04	Bldg B	Room #5	C	Window Case	Metal	Intact	Gray
10	0.10	0.30	Negative	2.00	1/17/2023	17:21:31	Bldg B	Room #5	C	Window Sill	Wood	Intact	Gray
11	2.40	0.30	Positive	2.00	1/17/2023	17:21:53	Bldg B	Room #5	C	Column	Concrete	Intact	Gray
12	0.50	0.30	Negative	2.00	1/17/2023	17:23:15	Bldg B	Room #5	C	Door	Metal	Intact	Gray
13	0.20	0.30	Negative	2.00	1/17/2023	17:23:39	Bldg B	Room #5	C	Door Jamb	Metal	Intact	Gray
14	0.20	0.30	Negative	2.00	1/17/2023	17:24:05	Bldg B	Room #5	C	Door Casing	Metal	Intact	Gray
15	0.30	0.30	Negative	2.00	1/17/2023	17:24:38	Bldg B	Room #5	A	Door Casing	Wood	Intact	Gray
16	0.30	0.30	Negative	2.00	1/17/2023	17:25:02	Bldg B	Room #5	A	Door Jamb	Metal	Intact	Gray
17	0.50	0.30	Negative	2.00	1/17/2023	17:25:59	Bldg B	Room #5	A	Door	Metal	Intact	Gray
18	0.10	0.30	Negative	2.00	1/17/2023	17:27:30	Bldg B	Room #5		Ceiling	Wood	Intact	White
19	0.40	0.30	Negative	2.00	1/17/2023	17:28:18	Bldg B	Room #5	C	Window Trim	Wood	Intact	Gray
20	0.50	0.30	Negative	2.00	1/17/2023	17:29:04	Bldg B	Room #5	A	Window Trim	Wood	Intact	Gray
21	1.00	0.20	Positive	5.00	1/17/2023	17:47:04	Bldg B	Room #6	A	Column	Concrete	Intact	Gray
22	3.40	0.30	Positive	2.00	1/17/2023	17:48:10	Bldg B	Room #6	A	Column	Concrete	Intact	Gray
23	0.10	0.30	Negative	2.00	1/17/2023	17:49:02	Bldg B	Room #6	A	Window Case	Metal	Intact	Gray
24	0.10	0.30	Negative	2.00	1/17/2023	17:49:43	Bldg B	Room #6	A	Window Sill	Wood	Intact	Gray
25	0.10	0.30	Negative	2.00	1/17/2023	17:50:21	Bldg B	Room #6	C	Window Sill	Wood	Intact	Gray
26	2.30	0.30	Positive	2.00	1/17/2023	17:50:54	Bldg B	Room #6	C	Column	Concrete	Intact	Gray
27	0.30	0.30	Negative	2.00	1/17/2023	17:51:20	Bldg B	Room #6	C	Window Case	Metal	Intact	Gray
28	0.10	0.30	Negative	2.00	1/17/2023	17:52:04	Bldg B	Room #6		Ceiling	Wood	Intact	White
29	0.10	0.30	Negative	2.00	1/17/2023	17:53:05	Bldg B	Room #6	C	Cabinet Door	Wood	Intact	Beige

LEAD-BASED PAINT INSPECTION

ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
30	0.50	0.30	Negative	2.00	1/17/2023	17:53:57	Bldg B	Room #6	C	Door	Metal	Intact	Gray
31	0.20	0.30	Negative	2.00	1/17/2023	17:55:06	Bldg B	Room #6	C	Door Casing	Metal	Intact	Gray
32	0.10	0.30	Negative	2.00	1/17/2023	17:55:36	Bldg B	Room #6	C	Door Jamb	Metal	Intact	Gray
33	0.20	0.30	Negative	2.00	1/17/2023	17:56:06	Bldg B	Room #6	A	Door Jamb	Metal	Fair	Gray
34	0.20	0.30	Negative	2.00	1/17/2023	17:56:32	Bldg B	Room #6	A	Door Casing	Wood	Intact	Gray
35	0.50	0.30	Negative	2.00	1/17/2023	17:57:05	Bldg B	Room #6	A	Door	Metal	Intact	Blue
36	0.40	0.30	Negative	2.00	1/17/2023	18:04:19	Bldg B	Room #7	A	Door	Metal	Intact	Blue
37	0.20	0.30	Negative	2.00	1/17/2023	18:04:47	Bldg B	Room #7	A	Door Jamb	Metal	Intact	Gray
38	0.20	0.30	Negative	2.00	1/17/2023	18:05:18	Bldg B	Room #7	A	Door Casing	Wood	Intact	Gray
39	0.50	0.30	Negative	2.00	1/17/2023	18:07:03	Bldg B	Room #7	C	Door	Metal	Intact	Blue
40	0.20	0.30	Negative	2.00	1/17/2023	18:07:27	Bldg B	Room #7	C	Door Jamb	Metal	Intact	Gray
41	0.20	0.30	Negative	2.00	1/17/2023	18:08:05	Bldg B	Room #7	C	Door Casing	Metal	Intact	Gray
42	0.20	0.30	Negative	2.00	1/17/2023	18:08:26	Bldg B	Room #7	C	Door Casing	Wood	Intact	Gray
43	0.10	0.30	Negative	2.00	1/17/2023	18:08:53	Bldg B	Room #7	C	Window Sill	Wood	Intact	Gray
44	2.00	0.30	Positive	2.00	1/17/2023	18:09:19	Bldg B	Room #7	C	Column	Concrete	Intact	Gray
45	0.20	0.30	Negative	2.00	1/17/2023	18:09:49	Bldg B	Room #7	C	Window Case	Metal	Intact	Gray
46	0.10	0.30	Negative	2.00	1/17/2023	18:10:18	Bldg B	Room #7	C	Mullions	Metal	Intact	Gray
47	0.10	0.30	Negative	2.00	1/17/2023	18:11:04	Bldg B	Room #7		Ceiling	Wood	Intact	White
48	1.80	0.30	Positive	2.00	1/17/2023	18:12:21	Bldg B	Room #7	A	Column	Concrete	Intact	Gray
49	0.30	0.30	Negative	2.00	1/17/2023	18:12:50	Bldg B	Room #7	A	Window Case	Metal	Intact	Gray
50	0.20	0.30	Negative	2.00	1/17/2023	18:13:28	Bldg B	Room #7	A	Window Sill	Wood	Intact	Gray
51	0.00	0.30	Negative	2.00	1/17/2023	18:14:03	Bldg B	Room #7	B	Cabinet Door	Wood	Intact	Gray
52	-0.10	0.30	Negative	2.00	1/17/2023	18:14:26	Bldg B	Room #7	C	Cabinet Frame	Wood	Intact	Gray
53	0.60	0.30	Negative	2.00	1/17/2023	18:24:14	Bldg B	Room #8	A	Door	Metal	Intact	Blue
54	0.30	0.30	Negative	2.00	1/17/2023	18:24:47	Bldg B	Room #8	A	Door Casing	Wood	Intact	Gray
55	0.30	0.30	Negative	2.00	1/17/2023	18:25:17	Bldg B	Room #8	C	Door Casing	Metal	Intact	Gray
56	0.50	0.30	Negative	2.00	1/17/2023	18:25:44	Bldg B	Room #8	C	Door	Metal	Intact	Blue
57	0.20	0.30	Negative	2.00	1/17/2023	18:26:07	Bldg B	Room #8	C	Door Jamb	Metal	Intact	Gray
58	1.30	0.20	Positive	5.00	1/17/2023	18:26:35	Bldg B	Room #8	C	Column	Concrete	Intact	Gray

LEAD-BASED PAINT INSPECTION ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
59	0.10	0.30	Negative	2.00	1/17/2023	18:27:17	Bldg B	Room #8	C	Window Sill	Wood	Intact	Gray
60	0.20	0.30	Negative	2.00	1/17/2023	18:27:41	Bldg B	Room #8	C	Window Case	Metal	Intact	Gray
61	0.20	0.30	Negative	2.00	1/17/2023	18:28:13	Bldg B	Room #8	C	Mullions	Metal	Intact	Gray
62	0.10	0.30	Negative	2.00	1/17/2023	18:28:59	Bldg B	Room #8	C	Window Trim	Metal	Intact	Gray
63	0.30	0.30	Negative	2.00	1/17/2023	18:29:37	Bldg B	Room #8	A	Window Trim	Wood	Intact	Gray
64	2.20	0.30	Positive	2.00	1/17/2023	18:30:20	Bldg B	Room #8	A	Column	Concrete	Intact	Gray
65	0.10	0.30	Negative	2.00	1/17/2023	18:31:10	Bldg B	Room #8	A	Window Sill	Wood	Intact	Gray
66	0.20	0.30	Negative	2.00	1/17/2023	18:31:40	Bldg B	Room #8	A	Window Case	Metal	Intact	Gray
67	-0.10	0.30	Negative	2.00	1/17/2023	18:32:20	Bldg B	Room #8		Ceiling	Wood	Intact	White
68	0.00	0.30	Negative	2.00	1/17/2023	18:35:36	Bldg B	Room #9		Ceiling	Wood	Intact	White
69	0.00	0.30	Negative	2.00	1/17/2023	18:37:25	Bldg B	Room #9	A	Door	Metal	Intact	Blue
70	0.30	0.30	Negative	2.00	1/17/2023	18:39:43	Bldg B	Room #9	A	Door Jamb	Metal	Intact	Gray
71	0.20	0.30	Negative	2.00	1/17/2023	18:40:11	Bldg B	Room #9	A	Door Casing	Wood	Intact	Gray
72	1.80	0.30	Positive	2.00	1/17/2023	18:41:08	Bldg B	Room #9	A	Column	Concrete	Intact	Gray
73	0.00	0.30	Negative	2.00	1/17/2023	18:41:35	Bldg B	Room #9	A	Window Sill	Wood	Intact	Gray
74	0.10	0.30	Negative	2.00	1/17/2023	18:42:13	Bldg B	Room #9	A	Window Case	Metal	Intact	Gray
75	0.10	0.30	Negative	2.00	1/17/2023	18:43:00	Bldg B	Room #9	A	Window Trim	Wood	Intact	Gray
76	0.00	0.30	Negative	2.00	1/17/2023	18:46:29	Bldg B	Room #9	A	Mullions	Metal	Intact	Gray
77	0.10	0.30	Negative	2.00	1/17/2023	18:47:36	Bldg B	Room #9		Ceiling	Wood	Intact	Gray
78	0.10	0.30	Negative	2.00	1/17/2023	18:51:03	Bldg B	Room #10	C	Ceiling	Wood	Intact	White
79	0.50	0.30	Negative	2.00	1/17/2023	18:51:43	Bldg B	Room #10	C	Window Trim	Wood	Intact	Gray
80	0.10	0.30	Negative	2.00	1/17/2023	18:52:48	Bldg B	Room #10	C	Window Case	Metal	Intact	Gray
81	0.10	0.30	Negative	2.00	1/17/2023	18:53:39	Bldg B	Room #10	C	Mullions	Metal	Intact	Gray
82	1.70	0.30	Positive	2.00	1/17/2023	18:54:22	Bldg B	Room #10	C	Column	Concrete	Intact	Gray
83	0.00	0.30	Negative	2.00	1/17/2023	18:55:08	Bldg B	Room #10	C	Window Sill	Wood	Intact	Gray
84	0.30	0.30	Negative	2.00	1/17/2023	18:55:57	Bldg B	Room #10	C	Door Casing	Wood	Intact	Gray
85	0.10	0.30	Negative	2.00	1/17/2023	18:56:29	Bldg B	Room #10	C	Door Jamb	Metal	Intact	Gray
86	0.00	0.30	Negative	2.00	1/17/2023	18:56:52	Bldg B	Room #10	C	Door	Metal	Intact	Blue
87	0.60	0.30	Negative	2.00	1/17/2023	19:02:32	Bldg B	Exterior	A	Door	Metal	Intact	Blue

LEAD-BASED PAINT INSPECTION

ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
88	0.10	0.30	Negative	2.00	1/17/2023	19:02:57	Bldg B	Exterior	A	Door Casing	Metal	Fair	Blue
89	0.10	0.30	Negative	2.00	1/17/2023	19:03:27	Bldg B	Exterior	A	Post	Metal	Intact	Blue
90	0.10	0.30	Negative	2.00	1/17/2023	19:04:24	Bldg B	Exterior	A	Floor	Concrete	Intact	Yellow
91	0.20	0.30	Negative	2.00	1/17/2023	19:05:45	Bldg B	Exterior	A	Window Case	Wood	Intact	White
92	0.10	0.30	Negative	2.00	1/17/2023	19:06:09	Bldg B	Exterior	A	Column	Concrete	Intact	White
93	-0.10	0.30	Negative	2.00	1/17/2023	19:06:33	Bldg B	Exterior	A	Window Sill	Wood	Intact	White
94	1.10	0.20	Positive	5.00	1/17/2023	19:08:00	Bldg B	Exterior	A	Wall	Wood	Intact	White
95	0.10	0.30	Negative	2.00	1/17/2023	19:08:52	Bldg B	Exterior	A	Vent Cover	Metal	Intact	White
96	0.10	0.30	Negative	2.00	1/17/2023	19:09:19	Bldg B	Exterior	A	Wall	Metal	Intact	White
97	0.70	0.20	Negative	4.00	1/17/2023	19:10:06	Bldg B	Exterior	A	Mullions	Metal	Intact	White
98	0.00	0.30	Negative	2.00	1/17/2023	19:11:11	Bldg B	Exterior	A	Ceiling	Stucco	Intact	Beige
99	0.30	0.30	Negative	2.00	1/17/2023	19:12:37	Bldg B	Exterior	A	Flashing	Metal	Intact	Blue
100	0.00	0.30	Negative	2.00	1/17/2023	19:13:13	Bldg B	Exterior	A	Wall	Stucco	Intact	Beige
101	0.00	0.30	Negative	2.00	1/17/2023	19:13:34	Bldg B	Exterior	B	Wall	Stucco	Intact	Beige
102	0.20	0.30	Negative	2.00	1/17/2023	19:13:58	Bldg B	Exterior	C	Wall	Stucco	Intact	Beige
103	0.10	0.30	Negative	2.00	1/17/2023	19:14:23	Bldg B	Exterior	D	Wall	Stucco	Intact	Beige
104	0.00	0.30	Negative	2.00	1/17/2023	19:15:06	Bldg B	Exterior	C	Ceiling	Stucco	Intact	Beige
105	0.00	0.30	Negative	2.00	1/17/2023	19:15:52	Bldg B	Exterior	C	Window Sill	Wood	Intact	White
106	1.80	0.30	Positive	2.00	1/17/2023	19:16:29	Bldg B	Exterior	C	Column	Concrete	Intact	White
107	0.30	0.30	Negative	2.00	1/17/2023	19:16:55	Bldg B	Exterior	C	Window Case	Metal	Intact	White
108	0.50	0.30	Negative	2.00	1/17/2023	19:17:37	Bldg B	Exterior	C	Mullions	Metal	Intact	White
109	1.70	0.30	Positive	2.00	1/17/2023	19:18:49	Bldg B	Exterior	C	Wall	Wood	Intact	Beige
110	2.60	0.30	Positive	2.00	1/17/2023	19:19:32	Bldg B	Exterior	B	Post	Metal	Intact	Blue
111	1.20	0.20	Positive	5.00	1/17/2023	19:19:50	Bldg B	Exterior	B	Post	Metal	Intact	Blue
112	0.10	0.30	Negative	2.00	1/17/2023	19:20:36	Bldg B	Exterior	B	Floor	Concrete	Intact	Yellow
113	0.10	0.30	Negative	2.00	1/17/2023	19:21:15	Bldg B	Exterior	C	Door	Metal	Intact	Blue
114	0.30	0.30	Negative	2.00	1/17/2023	19:21:34	Bldg B	Exterior	C	Door Casing	Metal	Intact	Blue
115	0.20	0.30	Negative	2.00	1/17/2023	19:25:35	Bldg B	Exterior	C	Flashing	Metal	Intact	Blue
116	0.10	0.30	Negative	2.00	1/17/2023	19:26:14	Bldg B	Exterior	D	Ceiling	Stucco	Intact	Beige

LEAD-BASED PAINT INSPECTION

ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
117	1.30	0.20	Positive	5.00	1/17/2023	19:26:56	Bldg B	Exterior	D	Wall	Concrete	Intact	Beige
118	0.10	0.30	Negative	2.00	1/17/2023	19:27:38	Bldg B	Exterior	D	Floor	Concrete	Intact	White
119	0.10	0.30	Negative	2.00	1/17/2023	19:44:08	Bldg E	Storage 1	A	Wall	Plaster	Intact	Beige
120	0.30	0.30	Negative	2.00	1/17/2023	19:44:29	Bldg E	Storage 1	D	Wall	Plaster	Intact	Beige
121	0.10	0.30	Negative	2.00	1/17/2023	19:44:59	Bldg E	Storage 1	C	Wall	Plaster	Fair	Green
122	0.00	0.30	Negative	2.00	1/17/2023	19:45:22	Bldg E	Storage 1	B	Wall	Plaster	Fair	Green
123	0.20	0.30	Negative	2.00	1/17/2023	19:45:55	Bldg E	Storage 1		Ceiling	Plaster	Intact	Beige
124	0.50	0.30	Negative	2.00	1/17/2023	19:46:45	Bldg E	Storage 1	A	Door	Metal	Intact	Blue
125	0.20	0.30	Negative	2.00	1/17/2023	19:47:10	Bldg E	Storage 1	A	Door Jamb	Metal	Fair	Green
126	0.20	0.30	Negative	2.00	1/17/2023	19:47:27	Bldg E	Storage 1	A	Door Casing	Metal	Fair	Green
127	0.80	0.20	Negative	5.00	1/17/2023	19:48:27	Bldg E	Storage 1	A	Window Case	Metal	Intact	Pink
128	0.30	0.30	Negative	2.00	1/17/2023	19:50:15	Bldg E	Storage 2	D	Window Case	Metal	Fair	Green
129	0.20	0.30	Negative	2.00	1/17/2023	19:50:58	Bldg E	Storage 2	D	Column	Concrete	Fair	Green
130	0.50	0.30	Negative	2.00	1/17/2023	19:51:39	Bldg E	Storage 2	D	Window Sill	Plaster	Fair	Green
131	-0.10	0.30	Negative	2.00	1/17/2023	19:53:18	Bldg E	Storage 2	A	Wall	Plaster	Poor	Yellow
132	-0.10	0.30	Negative	2.00	1/17/2023	19:53:40	Bldg E	Storage 2	C	Wall	Plaster	Fair	Yellow
133	0.00	0.30	Negative	2.00	1/17/2023	19:53:58	Bldg E	Storage 2	D	Wall	Plaster	Fair	Yellow
134	0.10	0.30	Negative	2.00	1/17/2023	19:54:46	Bldg E	Storage 2		Ceiling	Plaster	Intact	Yellow
135	0.10	0.30	Negative	2.00	1/17/2023	19:55:28	Bldg E	Storage 2	C	Door Jamb	Metal	Fair	Green
136	0.10	0.30	Negative	2.00	1/17/2023	19:55:46	Bldg E	Storage 2	C	Door Casing	Metal	Fair	Green
137	0.30	0.30	Negative	2.00	1/17/2023	19:56:21	Bldg E	Storage 2	C	Door	Metal	Intact	Blue
138	0.20	0.30	Negative	2.00	1/17/2023	20:08:43	Bldg E	Rm #11	A	Door	Metal	Intact	Blue
139	0.40	0.30	Negative	2.00	1/17/2023	20:09:21	Bldg E	Rm #11	A	Door Jamb	Metal	Intact	Gray
140	0.30	0.30	Negative	2.00	1/17/2023	20:09:45	Bldg E	Rm #11	A	Door Casing	Wood	Intact	Gray
141	0.20	0.30	Negative	2.00	1/17/2023	20:10:22	Bldg E	Rm #11	A	Window Sill	Wood	Intact	Gray
142	0.30	0.30	Negative	2.00	1/17/2023	20:11:12	Bldg E	Rm #11	A	Window Case	Wood	Intact	Gray
143	2.10	0.30	Positive	2.00	1/17/2023	20:11:40	Bldg E	Rm #11	A	Column	Concrete	Intact	Gray
144	0.10	0.30	Negative	2.00	1/17/2023	20:12:26	Bldg E	Rm #11	A	Mullions	Metal	Intact	Gray
145	0.10	0.30	Negative	2.00	1/17/2023	20:13:07	Bldg E	Rm #11		Ceiling	Wood	Intact	White

LEAD-BASED PAINT INSPECTION

ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
146	2.80	0.30	Positive	2.00	1/17/2023	20:14:00	Bldg E	Rm #11	C	Column	Concrete	Intact	Gray
147	0.20	0.30	Negative	2.00	1/17/2023	20:14:23	Bldg E	Rm #11	C	Window Sill	Wood	Intact	Gray
148	0.10	0.30	Negative	2.00	1/17/2023	20:14:52	Bldg E	Rm #11	C	Window Case	Wood	Intact	Gray
149	0.20	0.30	Negative	2.00	1/17/2023	20:15:27	Bldg E	Rm #11	C	Mullions	Metal	Intact	Gray
150	0.60	0.30	Negative	3.00	1/17/2023	20:16:21	Bldg E	Rm #11	C	Door	Metal	Intact	Blue
151	0.20	0.30	Negative	2.00	1/17/2023	20:16:46	Bldg E	Rm #11	C	Door Casing	Metal	Intact	Gray
152	0.20	0.30	Negative	2.00	1/17/2023	20:17:25	Bldg E	Rm #11	B	Wall	Wood	Intact	Beige
153	0.30	0.30	Negative	2.00	1/17/2023	20:17:42	Bldg E	Rm #11	A	Wall	Wood	Intact	Beige
154	0.10	0.30	Negative	2.00	1/17/2023	20:18:18	Bldg E	Rm #11		Ceiling	Wood	Intact	Beige
155	25.10	0.30	Positive	2.00	1/17/2023	20:18:49	Bldg E	Rm #11	A	Wall	Ceramic Tile	Intact	Yellow
156	23.80	0.30	Positive	2.00	1/17/2023	20:19:18	Bldg E	Rm #11	C	Wall	Ceramic Tile	Intact	Yellow
157	0.30	0.30	Negative	2.00	1/17/2023	20:19:48	Bldg E	Rm #11	C	Door Casing	Wood	Intact	Beige
158	0.20	0.30	Negative	2.00	1/17/2023	20:20:18	Bldg E	Rm #11	C	Door Jamb	Wood	Fair	Beige
159	0.10	0.30	Negative	2.00	1/17/2023	20:22:09	Bldg E	Rm #11		Floor	Ceramic Tile	Intact	Brown
160	0.50	0.30	Negative	2.00	1/17/2023	20:24:11	Bldg E	Rm #11 Boys R.R.		Ceiling	Wood	Intact	Beige
161	0.00	0.30	Negative	2.00	1/17/2023	20:24:35	Bldg E	Rm #11 Boys R.R.	A	Wall	Wood	Intact	Beige
162	0.40	0.30	Negative	2.00	1/17/2023	20:24:52	Bldg E	Rm #11 Boys R.R.	B	Wall	Wood	Intact	Beige
163	24.20	0.30	Positive	2.00	1/17/2023	20:25:16	Bldg E	Rm #11 Boys R.R.	C	Wall	Ceramic Tile	Intact	Yellow
164	1.10	0.20	Positive	5.00	1/17/2023	20:25:43	Bldg E	Rm #11 Boys R.R.	C	Column	Concrete	Intact	Beige
165	0.10	0.30	Negative	2.00	1/17/2023	20:26:21	Bldg E	Rm #11 Boys R.R.	C	Window Case	Metal	Intact	Beige
166	0.20	0.30	Negative	2.00	1/17/2023	20:56:49	Bldg E	Teacher's Rm	A	Window Case	Wood	Intact	Beige
167	0.00	0.30	Negative	2.00	1/17/2023	20:57:15	Bldg E	Teacher's Rm	A	Window Sill	Wood	Intact	Beige
168	1.70	0.30	Positive	2.00	1/17/2023	20:57:42	Bldg E	Teacher's Rm	A	Column	Concrete	Intact	Beige
169	0.40	0.30	Negative	2.00	1/17/2023	20:58:08	Bldg E	Teacher's Rm	A	Window Trim	Wood	Intact	Beige
170	-0.10	0.30	Negative	2.00	1/17/2023	20:58:35	Bldg E	Teacher's Rm		Ceiling	Wood	Intact	Beige
171	0.00	0.30	Negative	2.00	1/17/2023	20:59:46	Bldg E	Teacher's Rm	D	Wall	Wood	Intact	Beige
172	0.20	0.30	Negative	2.00	1/17/2023	21:00:04	Bldg E	Teacher's Rm	B	Wall	Wood	Intact	Beige
173	0.00	0.30	Negative	2.00	1/17/2023	21:02:40	Bldg E	Teacher's R.R.	A	Wall	Plaster	Intact	Beige
174	0.00	0.30	Negative	2.00	1/17/2023	21:03:14	Bldg E	Teacher's R.R.	C	Wall	Plaster	Intact	Beige

LEAD-BASED PAINT INSPECTION ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
175	23.30	0.30	Positive	2.00	1/17/2023	21:03:49	Bldg E	Teacher's R.R.	B	Wall	Ceramic Tile	Intact	Yellow
176	23.50	0.30	Positive	2.00	1/17/2023	21:04:06	Bldg E	Teacher's R.R.	D	Wall	Ceramic Tile	Intact	Yellow
177	-0.20	0.30	Negative	2.00	1/17/2023	21:04:39	Bldg E	Teacher's R.R.		Ceiling	Plaster	Intact	Beige
178	0.20	0.30	Negative	2.00	1/17/2023	21:05:37	Bldg E	Teacher's R.R.	A	Door Jamb	Wood	Intact	Beige
179	0.30	0.30	Negative	2.00	1/17/2023	21:06:06	Bldg E	Teacher's R.R.		Floor	Ceramic Tile	Intact	Brown
180	0.10	0.30	Negative	2.00	1/17/2023	21:08:10	Bldg E	Room #12	A	Door	Metal	Intact	Blue
181	0.30	0.30	Negative	2.00	1/17/2023	21:08:34	Bldg E	Room #12	A	Door Casing	Wood	Intact	Blue
182	3.40	0.30	Positive	2.00	1/17/2023	21:09:18	Bldg E	Room #12	A	Column	Concrete	Intact	Gray
183	0.20	0.30	Negative	2.00	1/17/2023	21:09:41	Bldg E	Room #12	A	Window Sill	Wood	Intact	Gray
184	0.30	0.30	Negative	2.00	1/17/2023	21:10:05	Bldg E	Room #12	A	Window Case	Wood	Intact	Gray
185	0.50	0.30	Negative	2.00	1/17/2023	21:10:26	Bldg E	Room #12	A	Window Trim	Wood	Intact	Gray
186	0.10	0.30	Negative	2.00	1/17/2023	21:11:11	Bldg E	Room #12	A	Wall	Wood	Intact	Beige
187	0.10	0.30	Negative	2.00	1/17/2023	21:11:34	Bldg E	Room #12		Ceiling	Wood	Intact	Beige
188	25.30	0.30	Positive	2.00	1/17/2023	21:12:33	Bldg E	Room #12	A	Wall	Ceramic Tile	Intact	Yellow
189	21.90	0.30	Positive	2.00	1/17/2023	21:13:30	Bldg E	Room #12 Boys R.R.	A	Wall	Ceramic Tile	Intact	Yellow
190	0.50	0.30	Negative	2.00	1/17/2023	21:13:53	Bldg E	Room #12 Boys R.R.	A	Wall	Wood	Intact	Beige
191	0.20	0.30	Negative	2.00	1/17/2023	21:14:23	Bldg E	Room #12 Boys R.R.	A	Door Jamb	Wood	Intact	Beige
192	1.40	0.20	Positive	3.00	1/17/2023	21:14:51	Bldg E	Room #12 Boys R.R.	C	Column	Concrete	Intact	Beige
193	0.10	0.30	Negative	2.00	1/17/2023	21:15:28	Bldg E	Room #12 Boys R.R.	C	Window Case	Metal	Intact	Beige
194	0.30	0.30	Negative	2.00	1/17/2023	21:17:47	Bldg E	Exterior	A	Window Case	Metal	Intact	Beige
195	1.90	0.30	Positive	2.00	1/17/2023	21:18:45	Bldg E	Exterior	A	Column	Concrete	Intact	Beige
196	0.10	0.30	Negative	2.00	1/17/2023	21:19:09	Bldg E	Exterior	A	Window Sill	Wood	Intact	Beige
197	0.80	0.20	Negative	5.00	1/17/2023	21:20:07	Bldg E	Exterior	A	Mullions	Metal	Intact	Beige
198	0.10	0.30	Negative	2.00	1/17/2023	21:21:00	Bldg E	Exterior	A	Vent Cover	Metal	Intact	Beige
199	0.10	0.30	Negative	2.00	1/17/2023	21:21:39	Bldg E	Exterior	A	Door	Metal	Intact	Blue
200	0.40	0.30	Negative	2.00	1/17/2023	21:22:13	Bldg E	Exterior	A	Door Casing	Metal	Intact	Blue
201	0.10	0.30	Negative	2.00	1/17/2023	21:23:29	Bldg E	Exterior	A	Flashing	Metal	Intact	Blue
202	2.40	0.30	Positive	2.00	1/17/2023	21:23:56	Bldg E	Exterior	A	Post	Metal	Intact	Blue
203	0.30	0.30	Negative	2.00	1/17/2023	21:24:31	Bldg E	Exterior	A	Floor	Concrete	Intact	Yellow

LEAD-BASED PAINT INSPECTION

ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
204	0.30	0.30	Negative	2.00	1/17/2023	21:24:51	Bldg E	Exterior	D	Floor	Concrete	Intact	Yellow
205	0.00	0.30	Negative	2.00	1/17/2023	21:25:29	Bldg E	Exterior	A	Wall	Stucco	Intact	Beige
206	0.00	0.30	Negative	2.00	1/17/2023	21:25:53	Bldg E	Exterior	D	Wall	Stucco	Intact	Beige
207	0.20	0.30	Negative	2.00	1/17/2023	21:26:11	Bldg E	Exterior	C	Wall	Stucco	Intact	Beige
208	0.10	0.30	Negative	2.00	1/17/2023	21:26:30	Bldg E	Exterior	B	Wall	Stucco	Intact	Beige
209	0.00	0.30	Negative	2.00	1/17/2023	21:27:15	Bldg E	Exterior	D	Ceiling	Stucco	Intact	Beige
210	0.00	0.30	Negative	2.00	1/17/2023	21:27:38	Bldg E	Exterior	A	Ceiling	Stucco	Intact	Beige
211	-0.10	0.30	Negative	2.00	1/17/2023	21:28:53	Bldg E	Exterior	B	Flashing	Metal	Intact	Blue
212	0.00	0.30	Negative	2.00	1/17/2023	21:30:31	Bldg E	Exterior	B	Flashing	Metal	Intact	Beige
213	0.10	0.30	Negative	2.00	1/17/2023	21:31:17	Bldg E	Exterior	D	Window Sill	Wood	Intact	Beige
214	0.20	0.30	Negative	2.00	1/17/2023	21:31:54	Bldg E	Exterior	D	Window Case	Metal	Intact	Beige
215	0.20	0.30	Negative	2.00	1/17/2023	21:32:13	Bldg E	Exterior	D	Window Frame	Metal	Intact	Beige
216	0.20	0.30	Negative	2.00	1/17/2023	21:33:29	Bldg E	Exterior	C	Window Case	Metal	Intact	Beige
217	0.30	0.30	Negative	2.00	1/17/2023	21:33:50	Bldg E	Exterior	C	Window Frame	Metal	Intact	Beige
218	1.50	0.30	Positive	2.00	1/17/2023	21:34:14	Bldg E	Exterior	C	Column	Concrete	Intact	Beige
219	0.40	0.30	Negative	2.00	1/17/2023	21:34:38	Bldg E	Exterior	C	Door Casing	Metal	Intact	Blue
220	0.50	0.30	Negative	2.00	1/17/2023	21:35:00	Bldg E	Exterior	C	Door	Metal	Intact	Blue
221	1.50	0.30	Positive	2.00	1/17/2023	21:36:03	Bldg E	Exterior	A	Column	Concrete	Intact	Beige
222	2.90	0.30	Positive	2.00	1/17/2023	21:47:07	Bldg C	Room #13	A	Column	Concrete	Intact	Gray
223	0.00	0.30	Negative	2.00	1/17/2023	21:48:07	Bldg C	Room #13	A	Window Case	Wood	Intact	Gray
224	0.00	0.30	Negative	2.00	1/17/2023	21:48:46	Bldg C	Room #13	A	Window Sill	Wood	Intact	Gray
225	0.60	0.30	Negative	2.00	1/17/2023	21:49:48	Bldg C	Room #13	A	Door	Metal	Fair	Blue
226	0.10	0.30	Negative	2.00	1/17/2023	21:50:14	Bldg C	Room #13	A	Door Casing	Wood	Intact	Blue
227	0.20	0.30	Negative	2.00	1/17/2023	21:50:45	Bldg C	Room #13	A	Door Jamb	Metal	Intact	Blue
228	0.40	0.30	Negative	2.00	1/17/2023	21:51:57	Bldg C	Room #13	A	Window Trim	Wood	Intact	Gray
229	0.00	0.30	Negative	2.00	1/17/2023	21:53:22	Bldg C	Room #13	A	Mullions	Metal	Intact	Gray
230	0.00	0.30	Negative	2.00	1/17/2023	21:54:12	Bldg C	Room #13		Ceiling	Wood	Intact	White
231	1.80	0.30	Positive	2.00	1/17/2023	21:55:02	Bldg C	Room #13	C	Column	Concrete	Intact	Beige
232	0.40	0.30	Negative	2.00	1/17/2023	21:55:33	Bldg C	Room #13	C	Door Casing	Wood	Intact	Gray

LEAD-BASED PAINT INSPECTION

ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
233	0.00	0.30	Negative	2.00	1/17/2023	21:56:10	Bldg C	Room #13	C	Window Sill	Wood	Intact	Gray
234	0.40	0.30	Negative	2.00	1/17/2023	21:56:35	Bldg C	Room #13	C	Window Case	Wood	Intact	Gray
235	0.10	0.30	Negative	2.00	1/17/2023	21:57:12	Bldg C	Room #13	C	Door Casing	Wood	Intact	Gray
236	0.20	0.30	Negative	2.00	1/17/2023	21:57:39	Bldg C	Room #13	C	Door Jamb	Metal	Intact	Gray
237	0.50	0.30	Negative	2.00	1/17/2023	21:58:04	Bldg C	Room #13	C	Door	Metal	Intact	Blue
238	0.10	0.30	Negative	2.00	1/17/2023	21:58:46	Bldg C	Room #13	B	Cabinet Door	Wood	Intact	Gray
239	0.10	0.30	Negative	2.00	1/17/2023	22:04:06	Bldg C	Room #15	B	Cabinet Door	Wood	Intact	Gray
240	0.20	0.30	Negative	2.00	1/17/2023	22:06:08	Bldg C	Room #15	A	Door	Metal	Intact	Blue
241	0.20	0.30	Negative	2.00	1/17/2023	22:06:58	Bldg C	Room #15	A	Door Casing	Wood	Intact	Gray
242	0.30	0.30	Negative	2.00	1/17/2023	22:07:25	Bldg C	Room #15	A	Door Jamb	Metal	Intact	Gray
243	1.30	0.20	Positive	5.00	1/17/2023	22:08:16	Bldg C	Room #15	A	Column	Concrete	Intact	Gray
244	0.20	0.30	Negative	2.00	1/17/2023	22:10:06	Bldg C	Room #15	A	Window Case	Wood	Intact	Gray
245	-0.10	0.30	Negative	2.00	1/17/2023	22:10:31	Bldg C	Room #15	A	Window Sill	Wood	Intact	Gray
246	0.00	0.30	Negative	2.00	1/17/2023	22:11:22	Bldg C	Room #15	A	Window Trim	Wood	Intact	Gray
247	0.20	0.30	Negative	2.00	1/17/2023	22:12:04	Bldg C	Room #15	A	Mullions	Metal	Intact	Gray
248	0.20	0.30	Negative	2.00	1/17/2023	22:12:44	Bldg C	Room #15		Ceiling	Wood	Intact	White
249	0.00	0.30	Negative	2.00	1/17/2023	22:18:45	Bldg C	Staff Rm		Ceiling	Wood	Intact	White
250	0.00	0.30	Negative	2.00	1/17/2023	22:20:40	Bldg C	Staff Rm	A	Door	Metal	Intact	Blue
251	0.20	0.30	Negative	2.00	1/17/2023	22:21:12	Bldg C	Staff Rm	A	Door Casing	Metal	Intact	Blue
252	0.10	0.30	Negative	2.00	1/17/2023	22:22:19	Bldg C	Staff Rm	A	Window Sill	Wood	Fair	Blue
253	0.30	0.30	Negative	2.00	1/17/2023	22:22:51	Bldg C	Staff Rm	A	Window Case	Wood	Intact	Blue
254	1.80	0.30	Positive	2.00	1/17/2023	22:23:42	Bldg C	Staff Rm	A	Window Frame	Wood	Intact	Blue
255	0.00	0.30	Negative	2.00	1/17/2023	22:24:27	Bldg C	Staff Rm	A	Wall	Wood	Intact	Beige
256	0.20	0.30	Negative	2.00	1/17/2023	22:24:47	Bldg C	Staff Rm	D	Wall	Wood	Intact	Beige
257	0.10	0.30	Negative	2.00	1/17/2023	22:25:06	Bldg C	Staff Rm	B	Wall	Wood	Intact	Beige
258	0.10	0.30	Negative	2.00	1/17/2023	22:25:25	Bldg C	Staff Rm	C	Wall	Wood	Intact	Beige
259	0.10	0.30	Negative	2.00	1/17/2023	22:25:57	Bldg C	Staff Rm	C	Door	Metal	Intact	Blue
260	0.10	0.30	Negative	2.00	1/17/2023	22:26:20	Bldg C	Staff Rm	C	Door Casing	Metal	Fair	Blue
261	-0.10	0.30	Negative	2.00	1/17/2023	22:26:50	Bldg C	Staff Rm	C	Door Casing	Wood	Fair	Blue

LEAD-BASED PAINT INSPECTION

ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
262	0.20	0.30	Negative	2.00	1/17/2023	22:27:22	Bldg C	Staff Rm	C	Window Sill	Wood	Fair	Blue
263	0.30	0.30	Negative	2.00	1/17/2023	22:27:58	Bldg C	Staff Rm	C	Window Case	Wood	Intact	Blue
264	3.00	0.30	Positive	2.00	1/17/2023	22:28:30	Bldg C	Staff Rm	C	Column	Concrete	Intact	Blue
265	0.30	0.30	Negative	2.00	1/17/2023	22:29:21	Bldg C	Staff Rm	C	Window Trim	Wood	Intact	Blue
266	0.00	0.30	Negative	2.00	1/17/2023	22:30:06	Bldg C	Staff Rm		Ceiling	Wood	Intact	Blue
267	0.40	0.30	Negative	2.00	1/17/2023	22:31:44	Bldg C	Staff R.R.		Ceiling	Drywall	Intact	Beige
268	0.20	0.30	Negative	2.00	1/17/2023	22:32:15	Bldg C	Staff R.R.	A	Wall	Drywall	Intact	Beige
269	0.30	0.30	Negative	2.00	1/17/2023	22:32:32	Bldg C	Staff R.R.	C	Wall	Drywall	Intact	Beige
270	0.10	0.30	Negative	2.00	1/17/2023	22:33:02	Bldg C	Staff R.R.	C	Door Casing	Metal	Intact	Blue
271	0.10	0.30	Negative	2.00	1/17/2023	22:33:23	Bldg C	Staff R.R.	C	Door	Metal	Intact	Blue
272	0.50	0.30	Negative	2.00	1/17/2023	22:34:35	Bldg C	Storage	A	Door	Metal	Intact	Blue
273	0.20	0.30	Negative	2.00	1/17/2023	22:35:11	Bldg C	Storage	A	Door Casing	Metal	Fair	Tan
274	-0.20	0.30	Negative	2.00	1/17/2023	22:36:34	Bldg C	Storage		Ceiling	Plaster	Intact	White
275	0.00	0.30	Negative	2.00	1/17/2023	22:37:24	Bldg C	Storage	A	Wall	Plaster	Intact	White
276	0.00	0.30	Negative	2.00	1/17/2023	22:38:07	Bldg C	Storage	D	Wall	Plaster	Intact	White
277	0.00	0.30	Negative	2.00	1/17/2023	22:39:39	Bldg C	Storage	A	Window Case	Metal	Intact	White
278	2.10	0.30	Positive	2.00	1/17/2023	22:40:08	Bldg C	Storage	A	Column	Concrete	Intact	White
279	0.00	0.30	Negative	2.00	1/17/2023	22:41:03	Bldg C	Storage	A	Mullions	Concrete	Intact	White
280	0.30	0.30	Negative	2.00	1/17/2023	22:47:56	Bldg C	Rm #17	C	Mullions	Metal	Intact	Gray
281	2.60	0.30	Positive	2.00	1/17/2023	22:48:54	Bldg C	Rm #17	C	Column	Concrete	Intact	Gray
282	0.30	0.30	Negative	2.00	1/17/2023	22:49:24	Bldg C	Rm #17	C	Window Sill	Metal	Intact	Gray
283	0.10	0.30	Negative	2.00	1/17/2023	22:49:57	Bldg C	Rm #17	C	Window Case	Metal	Intact	Gray
284	0.30	0.30	Negative	2.00	1/17/2023	22:50:40	Bldg C	Rm #17	C	Window Trim	Wood	Intact	Gray
285	0.00	0.30	Negative	2.00	1/17/2023	22:51:26	Bldg C	Rm #17		Ceiling	Wood	Intact	White
286	0.50	0.30	Negative	2.00	1/17/2023	22:52:08	Bldg C	Rm #17	C	Door	Metal	Intact	Blue
287	0.30	0.30	Negative	2.00	1/17/2023	22:52:45	Bldg C	Rm #17	C	Door Casing	Metal	Intact	Gray
288	0.10	0.30	Negative	2.00	1/17/2023	22:53:24	Bldg C	Rm #17	B	Cabinet Door	Wood	Intact	Gray
289	3.20	0.30	Positive	2.00	1/17/2023	23:00:28	Bldg C	Girls R.R.	A	Wall	Ceramic Tile	Intact	Beige
290	19.50	0.30	Positive	2.00	1/17/2023	23:00:47	Bldg C	Girls R.R.	C	Wall	Ceramic Tile	Intact	Beige

LEAD-BASED PAINT INSPECTION

ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
291	0.40	0.30	Negative	2.00	1/17/2023	23:02:23	Bldg C	Girls R.R.	D	Wall	Plaster	Intact	Beige
292	-0.10	0.30	Negative	2.00	1/17/2023	23:03:17	Bldg C	Girls R.R.	C	Wall	Plaster	Intact	Beige
293	0.10	0.30	Negative	2.00	1/17/2023	23:03:49	Bldg C	Girls R.R.		Ceiling	Plaster	Intact	Beige
294	0.10	0.30	Negative	2.00	1/17/2023	23:04:57	Bldg C	Girls R.R.	A	Door	Metal	Intact	Blue
295	0.50	0.30	Negative	2.00	1/17/2023	23:05:21	Bldg C	Girls R.R.	A	Door Jamb	Metal	Intact	Blue
296	0.50	0.30	Negative	2.00	1/17/2023	23:05:44	Bldg C	Girls R.R.	A	Door Casing	Metal	Intact	Blue
297	0.00	0.30	Negative	2.00	1/17/2023	23:06:21	Bldg C	Girls R.R.	A	Window Case	Metal	Intact	Beige
298	1.80	0.30	Positive	2.00	1/17/2023	23:07:01	Bldg C	Girls R.R.	A	Column	Concrete	Intact	Beige
299	-0.10	0.30	Negative	2.00	1/17/2023	23:07:41	Bldg C	Girls R.R.	A	Mullions	Metal	Intact	Beige
300	0.20	0.30	Negative	2.00	1/17/2023	23:11:16	Bldg C	Exterior	A	Door	Metal	Intact	Blue
301	0.40	0.30	Negative	2.00	1/17/2023	23:11:36	Bldg C	Exterior	A	Door Casing	Metal	Intact	Blue
302	0.00	0.30	Negative	2.00	1/17/2023	23:12:10	Bldg C	Exterior	A	Wall	Stucco	Intact	Beige
303	-0.10	0.30	Negative	2.00	1/17/2023	23:12:46	Bldg C	Exterior	C	Wall	Stucco	Intact	Beige
304	0.20	0.30	Negative	2.00	1/17/2023	23:13:18	Bldg C	Exterior	A	Ceiling	Stucco	Intact	Beige
305	0.30	0.30	Negative	2.00	1/17/2023	23:15:52	Bldg C	Exterior	C	Ceiling	Stucco	Intact	Beige
306	0.00	0.30	Negative	2.00	1/17/2023	23:16:59	Bldg C	Exterior	A	Window Sill	Wood	Intact	White
307	0.10	0.30	Negative	2.00	1/17/2023	23:17:33	Bldg C	Exterior	A	Window Case	Metal	Intact	White
308	0.10	0.30	Negative	2.00	1/17/2023	23:18:00	Bldg C	Exterior	A	Window Frame	Metal	Intact	White
309	0.50	0.30	Negative	2.00	1/17/2023	23:19:59	Bldg C	Exterior	A	Mullions	Metal	Intact	White
310	0.10	0.30	Negative	2.00	1/17/2023	23:20:56	Bldg C	Exterior	A	Vent Cover	Metal	Intact	White
311	0.30	0.30	Negative	2.00	1/17/2023	23:21:24	Bldg C	Exterior	A	Floor	Concrete	Intact	Yellow
312	2.80	0.30	Positive	2.00	1/17/2023	23:21:58	Bldg C	Exterior	A	Post	Metal	Fair	Blue
313	2.60	0.30	Positive	2.00	1/17/2023	23:22:19	Bldg C	Exterior	B	Post	Metal	Fair	Blue
314	0.20	0.30	Negative	2.00	1/17/2023	23:22:56	Bldg C	Exterior	A	Flashing	Metal	Intact	Blue
315	0.50	0.30	Negative	2.00	1/17/2023	23:24:25	Bldg C	Exterior	B	Door Casing	Metal	Intact	Blue
316	0.30	0.30	Negative	2.00	1/17/2023	23:25:09	Bldg C	Exterior	C	Door Casing	Metal	Intact	Blue
317	0.50	0.30	Negative	2.00	1/17/2023	23:25:30	Bldg C	Exterior	C	Door	Metal	Intact	Blue
318	0.10	0.30	Negative	2.00	1/17/2023	23:26:01	Bldg C	Exterior	C	Window Sill	Wood	Intact	Beige
319	0.30	0.30	Negative	2.00	1/17/2023	23:26:36	Bldg C	Exterior	C	Window Case	Metal	Intact	Beige

LEAD-BASED PAINT INSPECTION

ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
320	1.60	0.30	Positive	2.00	1/17/2023	23:27:06	Bldg C	Exterior	C	Column	Concrete	Intact	Beige
321	0.30	0.30	Negative	2.00	1/17/2023	23:27:40	Bldg C	Exterior	C	Mullions	Metal	Fair	Beige
322	-0.10	0.30	Negative	2.00	1/17/2023	23:28:35	Bldg C	Exterior	C	Flashing	Metal	Intact	Blue
323	0.20	0.30	Negative	2.00	1/17/2023	23:35:19	Bldg D	Rm #18	A	Wall	Plaster	Intact	White
324	0.20	0.30	Negative	2.00	1/17/2023	23:35:43	Bldg D	Rm #18	D	Wall	Plaster	Intact	Green
325	0.20	0.30	Negative	2.00	1/17/2023	23:36:07	Bldg D	Rm #18	B	Wall	Plaster	Intact	Tan
326	0.60	0.30	Negative	3.00	1/17/2023	23:36:47	Bldg D	Rm #18	A	Door	Metal	Fair	Blue
327	0.20	0.30	Negative	2.00	1/17/2023	23:37:26	Bldg D	Rm #18	A	Door Jamb	Metal	Fair	Gray
328	0.20	0.30	Negative	2.00	1/17/2023	23:37:46	Bldg D	Rm #18	A	Door Casing	Metal	Fair	Gray
329	1.60	0.30	Positive	2.00	1/17/2023	23:38:14	Bldg D	Rm #18	A	Column	Concrete	Intact	Gray
330	0.20	0.30	Negative	2.00	1/17/2023	23:39:07	Bldg D	Rm #18	A	Window Case	Wood	Intact	Gray
331	0.00	0.30	Negative	2.00	1/17/2023	23:39:40	Bldg D	Rm #18	A	Window Sill	Wood	Intact	Gray
332	0.10	0.30	Negative	2.00	1/17/2023	23:40:17	Bldg D	Rm #18		Ceiling	Wood	Intact	Gray
333	0.20	0.30	Negative	2.00	1/17/2023	23:40:52	Bldg D	Rm #18	C	Window Sill	Wood	Intact	Gray
334	0.20	0.30	Negative	2.00	1/17/2023	23:41:17	Bldg D	Rm #18	C	Window Case	Metal	Intact	Gray
335	2.00	0.30	Positive	2.00	1/17/2023	23:41:42	Bldg D	Rm #18	C	Column	Concrete	Intact	Gray
336	0.20	0.30	Negative	2.00	1/17/2023	23:42:23	Bldg D	Rm #18	C	Mullions	Metal	Fair	Gray
337	0.50	0.30	Negative	2.00	1/17/2023	23:43:29	Bldg D	Rm #18	C	Door	Metal	Fair	Blue
338	0.10	0.30	Negative	2.00	1/17/2023	23:46:08	Bldg D	Rm #18	C	Door Casing	Metal	Intact	Gray
339	0.20	0.30	Negative	2.00	1/17/2023	23:47:01	Bldg D	Rm #18		Ceiling	Drywall	Intact	White
340	0.10	0.30	Negative	2.00	1/17/2023	23:50:48	Bldg D	Rm #20		Ceiling	Wood	Intact	White
341	0.60	0.20	Negative	4.00	1/17/2023	23:51:56	Bldg D	Rm #20	C	Window Trim	Wood	Fair	Blue
342	0.00	0.30	Negative	2.00	1/17/2023	23:52:47	Bldg D	Rm #20	C	Mullions	Metal	Fair	Blue
343	0.10	0.30	Negative	2.00	1/17/2023	23:53:34	Bldg D	Rm #20	C	Window Case	Wood	Intact	Blue
344	0.10	0.30	Negative	2.00	1/17/2023	23:54:00	Bldg D	Rm #20	C	Window Case	Wood	Intact	Blue
345	1.80	0.30	Positive	2.00	1/17/2023	23:54:43	Bldg D	Rm #20	C	Column	Concrete	Intact	Blue
346	0.00	0.30	Negative	2.00	1/17/2023	23:55:07	Bldg D	Rm #20	C	Window Sill	Wood	Fair	Blue
347	0.50	0.30	Negative	2.00	1/17/2023	23:55:35	Bldg D	Rm #20	C	Door	Metal	Intact	Blue
348	0.00	0.30	Negative	2.00	1/17/2023	23:56:00	Bldg D	Rm #20	C	Door Casing	Metal	Fair	Blue

LEAD-BASED PAINT INSPECTION

ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
349	0.20	0.30	Negative	2.00	1/17/2023	23:56:49	Bldg D	Rm #20	D	Wall	Wood	Intact	Beige
350	0.00	0.30	Negative	2.00	1/17/2023	23:57:15	Bldg D	Rm #20	B	Wall	Wood	Fair	Beige
351	0.10	0.30	Negative	2.00	1/18/2023	0:03:59	Bldg D	Rm #22	A	Wall	Wood	Fair	Beige
352	0.10	0.30	Negative	2.00	1/18/2023	0:04:30	Bldg D	Rm #22	B	Wall	Wood	Intact	Beige
353	0.10	0.30	Negative	2.00	1/18/2023	0:04:51	Bldg D	Rm #22	D	Wall	Wood	Intact	Beige
354	0.20	0.30	Negative	2.00	1/18/2023	0:05:35	Bldg D	Rm #22	A	Door	Metal	Intact	Blue
355	0.20	0.30	Negative	2.00	1/18/2023	0:06:01	Bldg D	Rm #22	A	Door Casing	Wood	Fair	Blue
356	0.00	0.30	Negative	2.00	1/18/2023	0:06:37	Bldg D	Rm #22	A	Window Sill	Wood	Fair	Blue
357	0.10	0.30	Negative	2.00	1/18/2023	0:07:40	Bldg D	Rm #22	A	Window Case	Wood	Intact	Blue
358	1.00	0.20	Positive	5.00	1/18/2023	0:08:16	Bldg D	Rm #22	A	Column	Concrete	Intact	Blue
359	0.30	0.30	Negative	2.00	1/18/2023	0:09:14	Bldg D	Rm #22	A	Window Trim	Wood	Fair	Blue
360	0.20	0.30	Negative	2.00	1/18/2023	0:09:46	Bldg D	Rm #22	A	Mullions	Wood	Fair	Blue
361	0.00	0.30	Negative	2.00	1/18/2023	0:12:25	Bldg D	Rm #22	A	Wall	Wood	Fair	Beige
362	0.00	0.30	Negative	2.00	1/18/2023	0:13:09	Bldg D	Rm #22	C	Wall	Wood	Intact	Beige
363	1.30	0.20	Positive	4.00	1/18/2023	0:14:30	Bldg D	Rm #22	C	Column	Concrete	Intact	Blue
364	0.00	0.30	Negative	2.00	1/18/2023	0:15:15	Bldg D	Rm #22	C	Window Case	Wood	Intact	Blue
365	0.10	0.30	Negative	2.00	1/18/2023	0:15:44	Bldg D	Rm #22	C	Window Sill	Wood	Fair	Blue
366	0.00	0.30	Negative	2.00	1/18/2023	0:20:28	Bldg D	Staff R.R.	A	Window Case	Metal	Intact	Beige
367	0.20	0.30	Negative	2.00	1/18/2023	0:20:57	Bldg D	Staff R.R.	A	Wall	Plaster	Intact	Beige
368	0.10	0.30	Negative	2.00	1/18/2023	0:21:15	Bldg D	Staff R.R.	C	Wall	Plaster	Intact	Beige
369	0.10	0.30	Negative	2.00	1/18/2023	0:21:51	Bldg D	Staff R.R.	A	Door	Metal	Intact	Blue
370	0.20	0.30	Negative	2.00	1/18/2023	0:22:12	Bldg D	Staff R.R.	A	Door Jamb	Metal	Intact	Blue
371	0.10	0.30	Negative	2.00	1/18/2023	0:22:47	Bldg D	Staff R.R.		Ceiling	Plaster	Intact	Beige
372	0.10	0.30	Negative	2.00	1/18/2023	0:23:53	Bldg D	Custodian		Ceiling	Plaster	Intact	Beige
373	0.10	0.30	Negative	2.00	1/18/2023	0:24:19	Bldg D	Custodian	A	Wall	Plaster	Intact	Beige
374	0.30	0.30	Negative	2.00	1/18/2023	0:24:40	Bldg D	Custodian	D	Wall	Plaster	Intact	Beige
375	0.50	0.30	Negative	2.00	1/18/2023	0:25:05	Bldg D	Custodian	B	Wall	Plaster	Intact	Beige
376	0.20	0.30	Negative	2.00	1/18/2023	0:25:39	Bldg D	Custodian	A	Door Casing	Metal	Fair	Beige
377	0.10	0.30	Negative	2.00	1/18/2023	0:26:05	Bldg D	Custodian	A	Door Jamb	Metal	Fair	Beige

LEAD-BASED PAINT INSPECTION

ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
378	0.10	0.30	Negative	2.00	1/18/2023	0:26:48	Bldg D	Custodian	A	Door	Metal	Intact	Blue
379	0.50	0.30	Negative	2.00	1/18/2023	0:29:08	Bldg D	Girls R.R.	A	Door	Metal	Intact	Blue
380	0.20	0.30	Negative	2.00	1/18/2023	0:29:42	Bldg D	Girls R.R.	A	Door Casing	Metal	Fair	Blue
381	0.40	0.30	Negative	2.00	1/18/2023	0:30:49	Bldg D	Girls R.R.		Ceiling	Plaster	Intact	Beige
382	0.40	0.30	Negative	2.00	1/18/2023	0:31:27	Bldg D	Girls R.R.	D	Wall	Plaster	Intact	Beige
383	0.40	0.30	Negative	2.00	1/18/2023	0:31:49	Bldg D	Girls R.R.	B	Wall	Plaster	Intact	Beige
384	23.10	0.30	Positive	2.00	1/18/2023	0:32:37	Bldg D	Girls R.R.	C	Wall	Ceramic Tile	Intact	Yellow
385	23.40	0.30	Positive	2.00	1/18/2023	0:32:58	Bldg D	Girls R.R.	A	Wall	Ceramic Tile	Intact	Yellow
386	0.10	0.30	Negative	2.00	1/18/2023	0:33:25	Bldg D	Girls R.R.		Floor	Ceramic Tile	Intact	Brown
387	1.60	0.30	Positive	2.00	1/18/2023	0:34:10	Bldg D	Girls R.R.	A	Column	Concrete	Intact	Beige
388	0.00	0.30	Negative	2.00	1/18/2023	0:34:44	Bldg D	Girls R.R.	A	Window Case	Metal	Intact	Beige
389	0.20	0.30	Negative	2.00	1/18/2023	0:36:59	Bldg D	Girls R.R.	A	Mullions	Metal	Intact	Beige
390	0.10	0.30	Negative	2.00	1/18/2023	0:39:13	Bldg D	Ball Rm	C	Mullions	Metal	Fair	Beige
391	0.10	0.30	Negative	2.00	1/18/2023	0:40:04	Bldg D	Ball Rm	C	Window Sill	Wood	Poor	Beige
392	2.40	0.30	Positive	2.00	1/18/2023	0:41:06	Bldg D	Ball Rm	C	Column	Concrete	Fair	Beige
393	0.10	0.30	Negative	2.00	1/18/2023	0:41:35	Bldg D	Ball Rm	C	Window Case	Metal	Fair	Beige
394	0.20	0.30	Negative	2.00	1/18/2023	0:42:01	Bldg D	Ball Rm	C	Door Casing	Metal	Fair	Beige
395	0.30	0.30	Negative	2.00	1/18/2023	0:42:48	Bldg D	Ball Rm	C	Door	Metal	Poor	Brown
396	0.50	0.30	Negative	2.00	1/18/2023	0:43:29	Bldg D	Ball Rm	C	Door	Metal	Poor	Black
397	0.60	0.30	Negative	2.00	1/18/2023	0:44:42	Bldg D	Exterior	C	Door	Metal	Fair	Blue
398	0.50	0.30	Negative	3.00	1/18/2023	0:45:01	Bldg D	Exterior	C	Door Casing	Metal	Fair	Blue
399	0.20	0.30	Negative	2.00	1/18/2023	0:45:35	Bldg D	Exterior	C	Window Sill	Wood	Fair	Beige
400	0.20	0.30	Negative	2.00	1/18/2023	0:46:24	Bldg D	Exterior	C	Window Case	Metal	Fair	Beige
401	1.60	0.30	Positive	2.00	1/18/2023	0:46:59	Bldg D	Exterior	C	Column	Concrete	Intact	Beige
402	0.30	0.30	Negative	2.00	1/18/2023	0:47:35	Bldg D	Exterior	C	Mullions	Metal	Fair	Beige
403	0.40	0.30	Negative	2.00	1/18/2023	0:48:12	Bldg D	Exterior	C	Wall	Stucco	Intact	Beige
404	0.10	0.30	Negative	2.00	1/18/2023	0:48:40	Bldg D	Exterior	B	Wall	Stucco	Intact	Beige
405	-0.20	0.30	Negative	2.00	1/18/2023	0:49:01	Bldg D	Exterior	A	Wall	Stucco	Intact	Beige
406	0.30	0.30	Negative	2.00	1/18/2023	0:49:39	Bldg D	Exterior	B	Ceiling	Stucco	Intact	Beige

LEAD-BASED PAINT INSPECTION

ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
407	0.10	0.30	Negative	2.00	1/18/2023	0:50:42	Bldg D	Exterior	A	Ceiling	Stucco	Intact	Beige
408	2.70	0.30	Positive	2.00	1/18/2023	0:51:38	Bldg D	Exterior	B	Post	Metal	Fair	Blue
409	1.80	0.30	Positive	2.00	1/18/2023	0:52:13	Bldg D	Exterior	A	Post	Metal	Fair	Blue
410	0.20	0.30	Negative	2.00	1/18/2023	0:52:42	Bldg D	Exterior	A	Floor	Concrete	Intact	Yellow
411	0.10	0.30	Negative	2.00	1/18/2023	0:53:32	Bldg D	Exterior	A	Flashing	Metal	Intact	Blue
412	0.60	0.20	Negative	3.00	1/18/2023	0:53:57	Bldg D	Exterior	A	Door	Metal	Intact	Blue
413	0.20	0.30	Negative	2.00	1/18/2023	0:54:31	Bldg D	Exterior	A	Window Sill	Wood	Fair	White
414	0.20	0.30	Negative	2.00	1/18/2023	0:55:01	Bldg D	Exterior	A	Window Case	Metal	Intact	White
415	3.20	0.30	Positive	2.00	1/18/2023	0:55:33	Bldg D	Exterior	A	Column	Concrete	Intact	White
416	0.00	0.30	Negative	2.00	1/18/2023	0:56:29	Bldg D	Exterior	A	Wall	Metal	Intact	White
417	0.30	0.30	Negative	2.00	1/18/2023	0:57:39	Bldg D	Exterior	D	Flashing	Metal	Intact	Blue
418	1.00	0.20	Positive	5.00	1/18/2023	1:02:26				CALIBRATION - BACK			
419	1.10	0.20	Positive	5.00	1/18/2023	1:02:53				CALIBRATION - BACK			
420	1.10	0.20	Positive	5.00	1/18/2023	1:03:20				CALIBRATION - BACK			
421	1.00	0.20	Positive	5.00	1/18/2023	16:43:27				CALIBRATION - FRONT			
422	1.00	0.20	Positive	5.00	1/18/2023	16:43:55				CALIBRATION - FRONT			
423	1.00	0.20	Positive	5.00	1/18/2023	16:44:22				CALIBRATION - FRONT			
424	0.10	0.30	Negative	2.00	1/18/2023	16:48:25	Bldg R8	Rm #34 Ext.	A	Wall	Wood	Intact	Beige
425	0.00	0.30	Negative	2.00	1/18/2023	16:48:44	Bldg R8	Rm #34 Ext.	D	Wall	Wood	Intact	Beige
426	0.00	0.30	Negative	2.00	1/18/2023	16:49:14	Bldg R8	Rm #34 Ext.	C	Wall	Wood	Intact	Beige
427	0.10	0.30	Negative	2.00	1/18/2023	16:49:53	Bldg R8	Rm #34 Ext.	B	Wall	Wood	Intact	Beige
428	0.10	0.30	Negative	2.00	1/18/2023	17:09:29	Bldg R10	Rm #26 Ext.	A	Wall	Wood	Intact	Beige
429	0.10	0.30	Negative	2.00	1/18/2023	17:09:49	Bldg R10	Rm #26 Ext.	D	Wall	Wood	Intact	Beige
430	0.00	0.30	Negative	2.00	1/18/2023	17:10:09	Bldg R10	Rm #26 Ext.	C	Wall	Wood	Intact	Beige
431	0.10	0.30	Negative	2.00	1/18/2023	17:10:43	Bldg R10	Rm #26 Ext.	B	Wall	Wood	Intact	Beige
432	0.10	0.30	Negative	2.00	1/18/2023	17:11:19	Bldg R10	Rm #26 Ext.	C	Column	Steel	Intact	Beige
433	0.20	0.30	Negative	2.00	1/18/2023	17:12:30	Bldg R10	Rm #26 Ext.	A	Column	Steel	Intact	Beige
434	0.20	0.30	Negative	2.00	1/18/2023	17:14:55	Bldg R10	Rm #26 Ext.	D	Wall	Steel	Intact	Brown
435	0.10	0.30	Negative	2.00	1/18/2023	17:26:44	Bldg R2	Rm #35 Ext.	A	Wall	Wood	Intact	Beige

LEAD-BASED PAINT INSPECTION

ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
436	0.00	0.30	Negative	2.00	1/18/2023	17:28:46	Bldg R2	Rm #35 Ext.	D	Wall	Wood	Intact	Beige
437	0.10	0.30	Negative	2.00	1/18/2023	17:29:24	Bldg R2	Rm #35 Ext.	C	Wall	Wood	Intact	Beige
438	0.20	0.30	Negative	2.00	1/18/2023	17:29:46	Bldg R2	Rm #35 Ext.	B	Wall	Wood	Intact	Beige
439	0.10	0.30	Negative	2.00	1/18/2023	17:30:30	Bldg R2	Rm #35 Ext.	A	Column	Wood	Intact	Beige
440	0.00	0.30	Negative	2.00	1/18/2023	17:31:27	Bldg R1	Rm #36 Ext.	A	Column	Wood	Intact	Beige
441	0.10	0.30	Negative	2.00	1/18/2023	17:32:39	Bldg R1	Rm #36 Ext.	A	Wall	Wood	Intact	Beige
442	0.20	0.30	Negative	2.00	1/18/2023	17:32:59	Bldg R1	Rm #36 Ext.	D	Wall	Wood	Intact	Beige
443	0.10	0.30	Negative	2.00	1/18/2023	17:33:22	Bldg R1	Rm #36 Ext.	C	Wall	Wood	Intact	Beige
444	0.10	0.30	Negative	2.00	1/18/2023	17:34:00	Bldg R1	Rm #36 Ext.	B	Wall	Wood	Fair	Beige
445	0.00	0.30	Negative	2.00	1/18/2023	17:34:35	Bldg R1	Rm #36 Ext.	C	Foundation	Wood	Intact	Beige
446	0.10	0.30	Negative	2.00	1/18/2023	17:35:05	Bldg R1	Rm #36 Ext.	D	Foundation	Wood	Intact	Beige
447	0.20	0.30	Negative	2.00	1/18/2023	18:03:02	Bldg R9	Rm PTC Ext.	C	Wall	Wood	Intact	White
448	0.10	0.30	Negative	2.00	1/18/2023	18:03:30	Bldg R9	Rm PTC Ext.	B	Wall	Wood	Intact	White
449	0.20	0.30	Negative	2.00	1/18/2023	18:03:55	Bldg R9	Rm PTC Ext.	D	Wall	Wood	Intact	White
450	0.10	0.30	Negative	2.00	1/18/2023	18:04:26	Bldg R9	Rm PTC Ext.	A	Wall	Wood	Intact	White
451	0.00	0.30	Negative	2.00	1/18/2023	18:05:24	Bldg R9	Rm PTC Ext.	A	Trim	Wood	Intact	Blue
452	0.10	0.30	Negative	2.00	1/18/2023	18:06:14	Bldg R9	Rm PTC Ext.	D	Foundation	Wood	Intact	White
453	0.10	0.30	Negative	2.00	1/18/2023	18:06:41	Bldg R9	Rm PTC Ext.	C	Foundation	Wood	Intact	White
454	0.00	0.30	Negative	2.00	1/18/2023	18:07:19	Bldg R9	Rm PTC Ext.	C	Trim	Wood	Fair	Blue
455	0.10	0.30	Negative	2.00	1/18/2023	18:30:57	Bldg R3	Rm #29 Main	A	Wall	Wood	Intact	White
456	0.20	0.30	Negative	2.00	1/18/2023	18:31:25	Bldg R3	Rm #29 Main	B	Wall	Wood	Intact	White
457	0.20	0.30	Negative	2.00	1/18/2023	18:31:46	Bldg R3	Rm #29 Main	C	Wall	Wood	Intact	White
458	0.00	0.30	Negative	2.00	1/18/2023	18:32:44	Bldg R3	Rm #29 Main	C	Wall	Wood	Intact	White
459	0.00	0.30	Negative	2.00	1/18/2023	18:33:17	Bldg R3	Rm #29 Office	A	Wall	Wood	Intact	White
460	-0.10	0.30	Negative	2.00	1/18/2023	18:34:03	Bldg R3	Rm #29 Speech	A	Wall	Stucco	Intact	Beige
461	0.00	0.30	Negative	2.00	1/18/2023	18:34:35	Bldg R3	Rm 29 Ext.	D	Wall	Stucco	Intact	Beige
462	-0.20	0.30	Negative	2.00	1/18/2023	18:35:16	Bldg R3	Rm 29 Ext.	C	Wall	Stucco	Intact	Beige
463	0.10	0.30	Negative	2.00	1/18/2023	18:35:45	Bldg R3	Rm 29 Ext.	B	Wall	Stucco	Intact	Beige
464	0.10	0.30	Negative	2.00	1/18/2023	18:50:49	Bldg R4	Rm #28 Ext.	A	Wall	Stucco	Intact	Beige

LEAD-BASED PAINT INSPECTION

ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
465	-0.10	0.30	Negative	2.00	1/18/2023	18:51:11	Bldg R4	Rm #28 Ext.	B	Wall	Stucco	Intact	Beige
466	0.00	0.30	Negative	2.00	1/18/2023	18:51:40	Bldg R4	Rm #28 Ext.	D	Wall	Stucco	Intact	Beige
467	0.10	0.30	Negative	2.00	1/18/2023	18:52:33	Bldg R4	Rm #28 Ext.	C	Wall	Stucco	Intact	Beige
468	0.10	0.30	Negative	2.00	1/18/2023	18:55:01	Bldg R4	Rm #28	A	Wall	Wood	Intact	White
469	0.00	0.30	Negative	2.00	1/18/2023	18:55:24	Bldg R4	Rm #28	B	Wall	Wood	Intact	White
470	0.30	0.30	Negative	2.00	1/18/2023	18:55:45	Bldg R4	Rm #28	C	Wall	Wood	Intact	White
471	0.10	0.30	Negative	2.00	1/18/2023	18:56:09	Bldg R4	Rm #28	D	Wall	Wood	Intact	White
472	0.90	0.20	Negative	5.00	1/18/2023	19:05:08	Bldg R5-R7	Rms 23-25 Ext.	A	Wall	Wood	Fair	Beige
473	1.20	0.20	Positive	5.00	1/18/2023	19:06:08	Bldg R5-R7	Rms 23-25 Ext.	B	Wall	Wood	Fair	Beige
474	0.10	0.30	Negative	2.00	1/18/2023	19:08:08	Bldg R5-R7	Rms 23-25 Ext.	D	Wall	Wood	Fair	Beige
475	0.20	0.30	Negative	2.00	1/18/2023	19:09:05	Bldg R5-R7	Rms 23-25 Ext.	C	Wall	Wood	Intact	Beige
476	1.00	0.20	Positive	5.00	1/18/2023	19:09:39	Bldg R5-R7	Rms 23-25 Ext.	C	Wall	Wood	Intact	Beige
477	0.20	0.30	Negative	2.00	1/18/2023	19:10:24	Bldg R5-R7	Rms 23-25 Ext.	C	Column	Wood	Intact	Beige
478	1.20	0.20	Positive	5.00	1/18/2023	19:11:03	Bldg R5-R7	Rms 23-25 Ext.	B	Wall	Wood	Fair	Beige
479	1.00	0.20	Positive	5.00	1/18/2023	19:12:02	Bldg R5-R7	Rms 23-25 Ext.	A	Wall	Wood	Intact	Beige
480	0.10	0.30	Negative	2.00	1/18/2023	19:12:34	Bldg R5-R7	Rms 23-25 Ext.	A	Wall	Wood	Intact	Beige
481	0.10	0.30	Negative	2.00	1/18/2023	19:14:00	Bldg R5-R7	Rms 23-25 Ext.	A	Wall	Wood	Intact	Beige
482	0.20	0.30	Negative	2.00	1/18/2023	19:14:34	Bldg R5-R7	Rms 23-25 Ext.	C	Wall	Wood	Intact	Beige
483	0.30	0.30	Negative	2.00	1/18/2023	19:15:50	Bldg R5	Rm #25	A	Wall	Wood	Intact	Beige
484	0.20	0.30	Negative	2.00	1/18/2023	19:16:13	Bldg R5	Rm #25	B	Wall	Wood	Intact	Beige
485	0.20	0.30	Negative	2.00	1/18/2023	19:16:59	Bldg R5	Rm #25	C	Wall	Wood	Intact	Beige
486	0.10	0.30	Negative	2.00	1/18/2023	19:20:22	Bldg R6	Rm #24	A	Wall	Wood	Intact	Beige
487	0.10	0.30	Negative	2.00	1/18/2023	19:20:42	Bldg R6	Rm #24	B	Wall	Wood	Intact	Beige
488	0.10	0.30	Negative	2.00	1/18/2023	19:21:06	Bldg R6	Rm #24	C	Wall	Wood	Intact	Beige
489	0.20	0.30	Negative	2.00	1/18/2023	19:21:29	Bldg R6	Rm #24	D	Wall	Wood	Intact	Beige
490	0.00	0.30	Negative	2.00	1/18/2023	19:29:31	Bldg R7	Rm #23	A	Wall	Wood	Intact	Beige
491	0.00	0.30	Negative	2.00	1/18/2023	19:29:58	Bldg R7	Rm #23	B	Wall	Wood	Fair	Beige
492	0.10	0.30	Negative	2.00	1/18/2023	19:30:22	Bldg R7	Rm #23	C	Wall	Wood	Fair	Beige
18	0.10	0.30	Negative	2.00	1/18/2023	19:30:49	Bldg R7	Rm #23	D	Wall	Wood	Intact	Beige

LEAD-BASED PAINT INSPECTION

ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
494	1.10	0.20	Positive	5.00	1/18/2023	19:51:06				CALIBRATION - BACK			
495	1.00	0.20	Positive	5.00	1/18/2023	19:51:33				CALIBRATION - BACK			
496	1.10	0.20	Positive	5.00	1/18/2023	19:52:02				CALIBRATION - BACK			
497	1.00	0.20	Positive	5.00	1/18/2023	19:53:35				CALIBRATION - FRONT			
498	1.00	0.20	Positive	5.00	1/18/2023	19:54:02				CALIBRATION - FRONT			
499	1.10	0.20	Positive	5.00	1/18/2023	19:54:29				CALIBRATION - FRONT			
500	0.00	0.30	Negative	2.00	1/18/2023	19:56:33	Bldg A	Restroom	A	Wall	Drywall	Intact	Beige
501	0.10	0.30	Negative	2.00	1/18/2023	19:56:52	Bldg A	Restroom	B	Wall	Drywall	Intact	Beige
502	0.10	0.30	Negative	2.00	1/18/2023	19:57:10	Bldg A	Restroom	C	Wall	Drywall	Intact	Beige
503	0.10	0.30	Negative	2.00	1/18/2023	19:57:29	Bldg A	Restroom	D	Wall	Drywall	Intact	Beige
504	0.30	0.30	Negative	2.00	1/18/2023	19:57:54	Bldg A	Restroom	A	Wall	Ceramic Tile	Intact	Beige
505	0.30	0.30	Negative	2.00	1/18/2023	19:58:14	Bldg A	Restroom	C	Wall	Ceramic Tile	Intact	Beige
506	-0.10	0.30	Negative	2.00	1/18/2023	19:58:44	Bldg A	Restroom		Floor	Ceramic Tile	Intact	Brown
507	0.10	0.30	Negative	2.00	1/18/2023	19:59:41	Bldg A	Restroom	D	Door Casing	Metal	Fair	Beige
508	0.10	0.30	Negative	2.00	1/18/2023	20:00:50	Bldg A	Restroom		Ceiling	Drywall	Intact	Beige
509	0.10	0.30	Negative	2.00	1/18/2023	20:01:35	Bldg A	Staff Restroom		Ceiling	Drywall	Intact	Beige
510	0.20	0.30	Negative	2.00	1/18/2023	20:02:01	Bldg A	Staff Restroom	A	Wall	Drywall	Intact	Beige
511	0.20	0.30	Negative	2.00	1/18/2023	20:02:20	Bldg A	Staff Restroom	C	Wall	Drywall	Intact	Beige
512	0.40	0.30	Negative	2.00	1/18/2023	20:02:44	Bldg A	Staff Restroom	B	Wall	Ceramic Tile	Intact	Beige
513	0.20	0.30	Negative	2.00	1/18/2023	20:03:09	Bldg A	Staff Restroom	D	Wall	Ceramic Tile	Intact	Beige
514	-0.30	0.30	Negative	2.00	1/18/2023	20:03:41	Bldg A	Staff Restroom		Floor	Ceramic Tile	Intact	Brown
515	0.10	0.30	Negative	2.00	1/18/2023	20:04:31	Bldg A	Staff Restroom	D	Door Casing	Metal	Fair	Beige
516	0.10	0.30	Negative	2.00	1/18/2023	20:05:23	Bldg A	Janitor	B	Door Casing	Metal	Fair	Beige
517	0.10	0.30	Negative	2.00	1/18/2023	20:05:42	Bldg A	Janitor	B	Door Jamb	Metal	Intact	Beige
518	0.10	0.30	Negative	2.00	1/18/2023	20:06:11	Bldg A	Janitor	A	Wall	Drywall	Intact	Beige
519	0.00	0.30	Negative	2.00	1/18/2023	20:06:30	Bldg A	Janitor	B	Wall	Drywall	Intact	Beige
520	0.10	0.30	Negative	2.00	1/18/2023	20:06:48	Bldg A	Janitor	C	Wall	Drywall	Intact	Beige
521	0.10	0.30	Negative	2.00	1/18/2023	20:07:15	Bldg A	Janitor	D	Wall	Concrete	Intact	Beige
522	0.10	0.30	Negative	2.00	1/18/2023	20:07:41	Bldg A	Janitor		Ceiling	Drywall	Intact	Beige

LEAD-BASED PAINT INSPECTION

ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
523	0.10	0.30	Negative	2.00	1/18/2023	20:08:21	Bldg A	Storage		Ceiling	Drywall	Intact	Beige
524	0.00	0.30	Negative	2.00	1/18/2023	20:08:50	Bldg A	Storage	A	Wall	Drywall	Intact	Beige
525	0.10	0.30	Negative	2.00	1/18/2023	20:09:14	Bldg A	Storage	B	Wall	Drywall	Intact	Beige
526	0.20	0.30	Negative	2.00	1/18/2023	20:09:48	Bldg A	Storage	D	Wall	Concrete	Fair	Beige
527	0.10	0.30	Negative	2.00	1/18/2023	20:10:52	Bldg A	Storage	B	Door Casing	Metal	Intact	Beige
528	0.10	0.30	Negative	2.00	1/18/2023	20:11:53	Bldg A	R.R. Alcove	B	Door Casing	Metal	Fair	Beige
529	0.10	0.30	Negative	2.00	1/18/2023	20:12:12	Bldg A	R.R. Alcove	C	Door Casing	Metal	Fair	Beige
530	0.10	0.30	Negative	2.00	1/18/2023	20:13:03	Bldg A	R.R. Alcove	B	Baseboard	Wood	Intact	Beige
531	0.00	0.30	Negative	2.00	1/18/2023	20:13:27	Bldg A	R.R. Alcove	D	Baseboard	Wood	Intact	Beige
532	0.40	0.30	Negative	2.00	1/18/2023	20:14:00	Bldg A	R.R. Alcove	B	Wall	Plaster	Fair	Beige
533	0.40	0.30	Negative	2.00	1/18/2023	20:14:18	Bldg A	R.R. Alcove	D	Wall	Plaster	Fair	Beige
534	0.40	0.30	Negative	2.00	1/18/2023	20:14:38	Bldg A	R.R. Alcove	C	Wall	Plaster	Fair	Beige
535	0.30	0.30	Negative	2.00	1/18/2023	20:22:11	Bldg A	Office	A	Wall	Plaster	Fair	Beige
536	0.30	0.30	Negative	2.00	1/18/2023	20:22:58	Bldg A	Office	B	Wall	Plaster	Intact	Purple
537	-0.10	0.30	Negative	2.00	1/18/2023	20:23:51	Bldg A	Office	C	Wall	Concrete	Intact	Beige
538	0.10	0.30	Negative	2.00	1/18/2023	20:24:17	Bldg A	Office	D	Wall	Concrete	Intact	Beige
539	0.10	0.30	Negative	2.00	1/18/2023	20:24:51	Bldg A	Office	A	Door Casing	Metal	Intact	Beige
540	0.50	0.30	Negative	2.00	1/18/2023	20:25:34	Bldg A	Office	C	Window Frame	Metal	Fair	Beige
541	0.90	0.20	Negative	5.00	1/18/2023	20:26:04	Bldg A	Office	C	Window Case	Metal	Fair	Beige
542	0.20	0.30	Negative	2.00	1/18/2023	20:27:22	Bldg A	Office	C	Door	Metal	Intact	Blue
543	0.10	0.30	Negative	2.00	1/18/2023	20:27:53	Bldg A	Office	C	Door Casing	Metal	Fair	Blue
544	-0.10	0.30	Negative	2.00	1/18/2023	20:28:20	Bldg A	Office	C	Door Casing	Wood	Intact	Blue
545	0.20	0.30	Negative	2.00	1/18/2023	20:28:55	Bldg A	Office	C	Window Case	Metal	Intact	Blue
546	0.10	0.30	Negative	2.00	1/18/2023	20:29:49	Bldg A	Office	B	Baseboard	Wood	Intact	Purple
547	0.20	0.30	Negative	2.00	1/18/2023	20:43:08	Bldg A	Admin Office	A	Wall	Concrete	Intact	White
548	0.10	0.30	Negative	2.00	1/18/2023	20:43:44	Bldg A	Admin Office	B	Wall	Drywall	Intact	White
549	0.10	0.30	Negative	2.00	1/18/2023	20:44:36	Bldg A	Admin Office	C	Wall	Plaster	Intact	White
550	0.20	0.30	Negative	2.00	1/18/2023	20:45:11	Bldg A	Admin Office	D	Wall	Drywall	Intact	White
551	0.10	0.30	Negative	2.00	1/18/2023	21:13:33	Bldg A	Admin Office	D	Door Casing	Wood	Intact	White

LEAD-BASED PAINT INSPECTION ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
552	0.10	0.30	Negative	2.00	1/18/2023	21:13:58	Bldg A	Admin Office	D	Door Jamb	Metal	Intact	White
553	0.20	0.30	Negative	2.00	1/18/2023	21:14:34	Bldg A	Admin Office	D	Window Case	Metal	Intact	White
554	0.10	0.30	Negative	2.00	1/18/2023	21:15:19	Bldg A	Admin Office	D	Window Frame	Metal	Intact	White
555	0.40	0.30	Negative	2.00	1/18/2023	21:16:04	Bldg A	Admin Office	A	Window Frame	Metal	Intact	White
556	0.60	0.20	Negative	3.00	1/18/2023	21:16:26	Bldg A	Admin Office	A	Window Case	Metal	Intact	White
557	0.00	0.30	Negative	2.00	1/18/2023	21:17:29	Bldg A	Admin Office	A	Window Sill	Wood	Intact	White
558	3.10	0.30	Positive	2.00	1/18/2023	21:17:55	Bldg A	Admin Office	A	Window Apron	Wood	Intact	White
559	2.20	0.30	Positive	2.00	1/18/2023	21:18:51	Bldg A	Admin Office	A	Door Casing	Wood	Intact	White
560	2.20	0.30	Positive	2.00	1/18/2023	21:19:19	Bldg A	Admin Office	A	Cabinet Door	Wood	Intact	White
561	0.00	0.30	Negative	2.00	1/18/2023	21:19:47	Bldg A	Admin Office	B	Door	Wood	Fair	White
562	0.10	0.30	Negative	2.00	1/18/2023	21:20:12	Bldg A	Admin Office	B	Door Jamb	Metal	Fair	White
563	0.10	0.30	Negative	2.00	1/18/2023	21:20:31	Bldg A	Admin Office	B	Door Casing	Metal	Fair	White
564	0.10	0.30	Negative	2.00	1/18/2023	21:21:00	Bldg A	Admin Office	C	Door Casing	Metal	Fair	White
565	0.10	0.30	Negative	2.00	1/18/2023	21:21:26	Bldg A	Admin Office	C	Door	Wood	Intact	White
566	0.00	0.30	Negative	2.00	1/18/2023	21:21:58	Bldg A	Admin Office	D	Column	Concrete	Intact	White
567	0.30	0.30	Negative	2.00	1/18/2023	21:22:36	Bldg A	Admin Office	C	Wall	Wood	Intact	White
568	0.20	0.30	Negative	2.00	1/18/2023	21:29:31	Bldg A	Admin Health Ofc	A	Wall	Drywall	Intact	White
569	0.10	0.30	Negative	2.00	1/18/2023	21:29:49	Bldg A	Admin Health Ofc	B	Wall	Drywall	Intact	White
570	0.20	0.30	Negative	2.00	1/18/2023	21:30:11	Bldg A	Admin Health Ofc	C	Wall	Drywall	Intact	White
571	0.10	0.30	Negative	2.00	1/18/2023	21:30:52	Bldg A	Admin Health Ofc	D	Wall	Plaster	Intact	White
572	0.20	0.30	Negative	2.00	1/18/2023	21:31:48	Bldg A	Teachers	A	Wall	Plaster	Intact	Beige
573	0.00	0.30	Negative	2.00	1/18/2023	21:32:17	Bldg A	Teachers	B	Wall	Plaster	Intact	Beige
574	0.10	0.30	Negative	2.00	1/18/2023	21:32:47	Bldg A	Teachers	C	Wall	Drywall	Intact	Beige
575	0.10	0.30	Negative	2.00	1/18/2023	21:33:42	Bldg A	Teachers	D	Wall	Plaster	Fair	Beige
576	0.20	0.30	Negative	2.00	1/18/2023	21:35:19	Bldg A	Admin R.R.	A	Wall	Drywall	Intact	White
577	0.10	0.30	Negative	2.00	1/18/2023	21:35:37	Bldg A	Admin R.R.	B	Wall	Drywall	Intact	White
578	0.10	0.30	Negative	2.00	1/18/2023	21:35:57	Bldg A	Admin R.R.	C	Wall	Drywall	Intact	White
579	0.10	0.30	Negative	2.00	1/18/2023	21:36:14	Bldg A	Admin R.R.	D	Wall	Drywall	Intact	White
580	0.30	0.30	Negative	2.00	1/18/2023	21:36:39	Bldg A	Admin R.R.	D	Wall	Ceramic Tile	Intact	Beige

LEAD-BASED PAINT INSPECTION

ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
581	0.20	0.30	Negative	2.00	1/18/2023	21:36:56	Bldg A	Admin R.R.	B	Wall	Ceramic Tile	Intact	Beige
582	4.10	0.30	Positive	2.00	1/18/2023	21:43:48	Bldg A	Mail Rm	A	Wall	Concrete	Intact	Beige
583	0.10	0.30	Negative	2.00	1/18/2023	21:44:15	Bldg A	Mail Rm	C	Wall	Drywall	Intact	Beige
584	0.10	0.30	Negative	2.00	1/18/2023	21:46:21	Bldg A	Mail Rm	D	Wall	Plaster	Intact	Beige
585	0.40	0.30	Negative	2.00	1/18/2023	21:47:37	Bldg A	Book Rm	B	Wall	Plaster	Intact	Beige
586	0.40	0.30	Negative	2.00	1/18/2023	21:47:56	Bldg A	Book Rm	C	Wall	Plaster	Intact	Beige
587	0.10	0.30	Negative	2.00	1/18/2023	21:48:24	Bldg A	Book Rm	D	Wall	Drywall	Intact	Beige
588	3.70	0.30	Positive	2.00	1/18/2023	21:49:03	Bldg A	Supervisor	A	Wall	Concrete	Intact	Beige
589	0.30	0.30	Negative	2.00	1/18/2023	21:49:36	Bldg A	Supervisor	B	Wall	Plaster	Intact	Beige
590	0.10	0.30	Negative	2.00	1/18/2023	21:50:22	Bldg A	Supervisor	A	Wall	Plaster	Intact	Beige
591	3.00	0.30	Positive	2.00	1/18/2023	21:50:47	Bldg A	Supervisor	A	Wall	Concrete	Intact	Beige
592	0.40	0.30	Negative	2.00	1/18/2023	21:52:50	Bldg A	Conf. Rm	D	Wall	Plaster	Intact	Beige
593	0.30	0.30	Negative	2.00	1/18/2023	21:53:21	Bldg A	Conf. Rm	B	Wall	Plaster	Intact	Beige
594	-0.10	0.30	Negative	2.00	1/18/2023	21:55:23	Bldg A	Foyer	A	Wall	Plaster	Intact	Beige
595	-0.10	0.30	Negative	2.00	1/18/2023	21:55:43	Bldg A	Foyer	B	Wall	Plaster	Intact	Beige
596	3.80	0.30	Positive	2.00	1/18/2023	21:56:04	Bldg A	Foyer	C	Wall	Plaster	Intact	Beige
597	0.20	0.30	Negative	2.00	1/18/2023	22:02:43	Bldg A	Library	C	Wall	Wood	Intact	Beige
598	0.10	0.30	Negative	2.00	1/18/2023	22:05:09	Bldg A	Admin Hallway	A	Wall	Plaster	Intact	Beige
599	0.30	0.30	Negative	2.00	1/18/2023	22:05:29	Bldg A	Admin Hallway	C	Wall	Plaster	Intact	Beige
600	0.10	0.30	Negative	2.00	1/18/2023	22:05:52	Bldg A	Admin Hallway	B	Wall	Plaster	Intact	Beige
601	0.20	0.30	Negative	2.00	1/18/2023	22:06:31	Bldg A	Admin Hallway	D	Wall	Plaster	Intact	Beige
602	0.10	0.30	Negative	2.00	1/18/2023	22:06:53	Bldg A	Admin Hallway	A	Wall	Plaster	Intact	Beige
603	0.10	0.30	Negative	2.00	1/18/2023	22:08:41	Bldg A	Staff Lounge	A	Wall	Drywall	Intact	Beige
604	0.00	0.30	Negative	2.00	1/18/2023	22:09:03	Bldg A	Staff Lounge	B	Wall	Drywall	Fair	Beige
605	0.40	0.30	Negative	2.00	1/18/2023	22:09:34	Bldg A	Staff Lounge	C	Wall	Plaster	Intact	Beige
606	-0.10	0.30	Negative	2.00	1/18/2023	22:09:56	Bldg A	Staff Lounge	D	Wall	Plaster	Intact	Beige
607	0.20	0.30	Negative	2.00	1/18/2023	22:11:11	Bldg A	Staff Lounge	A	Wall	Plaster	Intact	Beige
608	0.00	0.30	Negative	2.00	1/18/2023	22:11:30	Bldg A	Staff Lounge	B	Wall	Plaster	Intact	Beige
609	0.30	0.30	Negative	2.00	1/18/2023	22:11:54	Bldg A	Staff Lounge	C	Wall	Plaster	Intact	Beige

LEAD-BASED PAINT INSPECTION ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
610	0.40	0.30	Negative	2.00	1/18/2023	22:12:24	Bldg A	Staff Lounge	D	Wall	Plaster	Fair	Beige
611	-0.10	0.30	Negative	2.00	1/18/2023	22:17:03	Bldg A	Kitchen R.R.	A	Wall	Plaster	Intact	Beige
612	0.40	0.30	Negative	2.00	1/18/2023	22:17:25	Bldg A	Kitchen R.R.	C	Wall	Plaster	Intact	Beige
613	24.90	0.30	Positive	2.00	1/18/2023	22:17:56	Bldg A	Kitchen R.R.	A	Wall	Ceramic Tile	Intact	Yellow
614	0.50	0.30	Negative	2.00	1/18/2023	22:19:59	Bldg A	Cafeteria	A	Wall	Concrete	Intact	Beige
615	0.50	0.30	Negative	2.00	1/18/2023	22:20:34	Bldg A	Cafeteria	B	Wall	Concrete	Intact	Beige
616	0.10	0.30	Negative	2.00	1/18/2023	22:21:15	Bldg A	Cafeteria	B	Wall	Plaster	Intact	Beige
617	0.20	0.30	Negative	2.00	1/18/2023	22:21:40	Bldg A	Cafeteria	D	Wall	Plaster	Intact	Beige
618	0.40	0.30	Negative	2.00	1/18/2023	22:22:01	Bldg A	Cafeteria	D	Wall	Concrete	Intact	Beige
619	0.50	0.30	Negative	2.00	1/18/2023	22:22:27	Bldg A	Cafeteria	C	Wall	Concrete	Intact	Beige
620	0.20	0.30	Negative	2.00	1/18/2023	22:22:47	Bldg A	Cafeteria	C	Wall	Plaster	Intact	Beige
621	-0.10	0.30	Negative	2.00	1/18/2023	22:24:09	Bldg A	Stage Area	B	Wall	Plaster	Intact	Beige
622	-0.10	0.30	Negative	2.00	1/18/2023	22:24:28	Bldg A	Stage Area	A	Wall	Plaster	Intact	Beige
623	0.10	0.30	Negative	2.00	1/18/2023	22:24:48	Bldg A	Stage Area	C	Wall	Plaster	Intact	Beige
624	-0.20	0.30	Negative	2.00	1/18/2023	22:25:44	Bldg A	Stage Area	D	Wall	Plaster	Intact	Beige
625	-0.10	0.30	Negative	2.00	1/18/2023	22:29:08	Bldg A	Stage Office	A	Wall	Plaster	Intact	Beige
626	0.10	0.30	Negative	2.00	1/18/2023	22:29:26	Bldg A	Stage Office	C	Wall	Plaster	Intact	Beige
627	0.10	0.30	Negative	2.00	1/18/2023	22:29:44	Bldg A	Stage Office	D	Wall	Plaster	Intact	Beige
628	0.20	0.30	Negative	2.00	1/18/2023	22:30:31	Bldg A	Music Rm	A	Wall	Plaster	Intact	Beige
629	0.10	0.30	Negative	2.00	1/18/2023	22:30:51	Bldg A	Music Rm	D	Wall	Plaster	Intact	Beige
630	0.00	0.30	Negative	2.00	1/18/2023	22:31:10	Bldg A	Music Rm	B	Wall	Plaster	Intact	Beige
631	0.20	0.30	Negative	2.00	1/18/2023	22:33:34	Bldg A	Exterior	B	Wall	Stucco	Intact	Beige
632	0.30	0.30	Negative	2.00	1/18/2023	22:35:33	Bldg A	Exterior	B	Wall	Stucco	Intact	Beige
633	0.10	0.30	Negative	2.00	1/18/2023	22:36:13	Bldg A	Exterior	C	Wall	Concrete	Intact	Beige
634	0.50	0.30	Negative	2.00	1/18/2023	22:37:18	Bldg A	Exterior	C	Wall	Stucco	Intact	Beige
635	0.20	0.30	Negative	2.00	1/18/2023	22:37:44	Bldg A	Exterior	B	Wall	Stucco	Intact	Beige
636	0.50	0.30	Negative	2.00	1/18/2023	22:38:19	Bldg A	Exterior	A	Wall	Stucco	Intact	Beige

LEAD-BASED PAINT INSPECTION ALL READINGS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
637	1.00	0.20	Positive	5.00	1/18/2023	22:40:07				CALIBRATION - BACK			
638	1.10	0.20	Positive	5.00	1/18/2023	22:40:34				CALIBRATION - BACK			
639	1.10	0.20	Positive	5.00	1/18/2023	22:41:02				CALIBRATION - BACK			

*** Indications as to Positive or Negative are based on comparison to 1.0 mg/cm².
 Cal/OSHA regulates operations which disturb lead in any detectable amount.
 Refer to the enclosed Cal/OSHA Regulation 8 CCR 1532.1 for requirements.**

Appendix D

XRF Results for Lead Positive Readings in Excess of 1.0 mg/cm²

LEAD-BASED PAINT INSPECTION POSITIVE RESULTS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 17 & 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
5	2.60	0.30	Positive	2.00	1/17/2023	17:19:11	Bldg B	Room #5	A	Column	Concrete	Intact	Gray
11	2.40	0.30	Positive	2.00	1/17/2023	17:21:53	Bldg B	Room #5	C	Column	Concrete	Intact	Gray
21	1.00	0.20	Positive	5.00	1/17/2023	17:47:04	Bldg B	Room #6	A	Column	Concrete	Intact	Gray
22	3.40	0.30	Positive	2.00	1/17/2023	17:48:10	Bldg B	Room #6	A	Column	Concrete	Intact	Gray
26	2.30	0.30	Positive	2.00	1/17/2023	17:50:54	Bldg B	Room #6	C	Column	Concrete	Intact	Gray
44	2.00	0.30	Positive	2.00	1/17/2023	18:09:19	Bldg B	Room #7	C	Column	Concrete	Intact	Gray
48	1.80	0.30	Positive	2.00	1/17/2023	18:12:21	Bldg B	Room #7	A	Column	Concrete	Intact	Gray
58	1.30	0.20	Positive	5.00	1/17/2023	18:26:35	Bldg B	Room #8	C	Column	Concrete	Intact	Gray
64	2.20	0.30	Positive	2.00	1/17/2023	18:30:20	Bldg B	Room #8	A	Column	Concrete	Intact	Gray
72	1.80	0.30	Positive	2.00	1/17/2023	18:41:08	Bldg B	Room #9	A	Column	Concrete	Intact	Gray
82	1.70	0.30	Positive	2.00	1/17/2023	18:54:22	Bldg B	Room #10	C	Column	Concrete	Intact	Gray
94	1.10	0.20	Positive	5.00	1/17/2023	19:08:00	Bldg B	Exterior	A	Wall	Wood	Intact	White
106	1.80	0.30	Positive	2.00	1/17/2023	19:16:29	Bldg B	Exterior	C	Column	Concrete	Intact	White
109	1.70	0.30	Positive	2.00	1/17/2023	19:18:49	Bldg B	Exterior	C	Wall	Wood	Intact	Beige
110	2.60	0.30	Positive	2.00	1/17/2023	19:19:32	Bldg B	Exterior	B	Post	Metal	Intact	Blue
111	1.20	0.20	Positive	5.00	1/17/2023	19:19:50	Bldg B	Exterior	B	Post	Metal	Intact	Blue
117	1.30	0.20	Positive	5.00	1/17/2023	19:26:56	Bldg B	Exterior	D	Wall	Concrete	Intact	Beige
143	2.10	0.30	Positive	2.00	1/17/2023	20:11:40	Bldg E	Rm #11	A	Column	Concrete	Intact	Gray
146	2.80	0.30	Positive	2.00	1/17/2023	20:14:00	Bldg E	Rm #11	C	Column	Concrete	Intact	Gray
155	25.10	0.30	Positive	2.00	1/17/2023	20:18:49	Bldg E	Rm #11	A	Wall	Ceramic Tile	Intact	Yellow
156	23.80	0.30	Positive	2.00	1/17/2023	20:19:18	Bldg E	Rm #11	C	Wall	Ceramic Tile	Intact	Yellow
163	24.20	0.30	Positive	2.00	1/17/2023	20:25:16	Bldg E	Rm #11 Boys R.R.	C	Wall	Ceramic Tile	Intact	Yellow
164	1.10	0.20	Positive	5.00	1/17/2023	20:25:43	Bldg E	Rm #11 Boys R.R.	C	Column	Concrete	Intact	Beige
168	1.70	0.30	Positive	2.00	1/17/2023	20:57:42	Bldg E	Teacher's Rm	A	Column	Concrete	Intact	Beige
175	23.30	0.30	Positive	2.00	1/17/2023	21:03:49	Bldg E	Teacher's R.R.	B	Wall	Ceramic Tile	Intact	Yellow
176	23.50	0.30	Positive	2.00	1/17/2023	21:04:06	Bldg E	Teacher's R.R.	D	Wall	Ceramic Tile	Intact	Yellow
182	3.40	0.30	Positive	2.00	1/17/2023	21:09:18	Bldg E	Room #12	A	Column	Concrete	Intact	Gray
188	25.30	0.30	Positive	2.00	1/17/2023	21:12:33	Bldg E	Room #12	A	Wall	Ceramic Tile	Intact	Yellow

LEAD-BASED PAINT INSPECTION POSITIVE RESULTS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 17 & 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
189	21.90	0.30	Positive	2.00	1/17/2023	21:13:30	Bldg E	Room #12 Boys R.R.	A	Wall	Ceramic Tile	Intact	Yellow
192	1.40	0.20	Positive	3.00	1/17/2023	21:14:51	Bldg E	Room #12 Boys R.R.	C	Column	Concrete	Intact	Beige
195	1.90	0.30	Positive	2.00	1/17/2023	21:18:45	Bldg E	Exterior	A	Column	Concrete	Intact	Beige
202	2.40	0.30	Positive	2.00	1/17/2023	21:23:56	Bldg E	Exterior	A	Post	Metal	Intact	Blue
218	1.50	0.30	Positive	2.00	1/17/2023	21:34:14	Bldg E	Exterior	C	Column	Concrete	Intact	Beige
221	1.50	0.30	Positive	2.00	1/17/2023	21:36:03	Bldg E	Exterior	A	Column	Concrete	Intact	Beige
222	2.90	0.30	Positive	2.00	1/17/2023	21:47:07	Bldg C	Room #13	A	Column	Concrete	Intact	Gray
231	1.80	0.30	Positive	2.00	1/17/2023	21:55:02	Bldg C	Room #13	C	Column	Concrete	Intact	Beige
243	1.30	0.20	Positive	5.00	1/17/2023	22:08:16	Bldg C	Room #15	A	Column	Concrete	Intact	Gray
254	1.80	0.30	Positive	2.00	1/17/2023	22:23:42	Bldg C	Staff Rm	A	Window Frame	Wood	Intact	Blue
264	3.00	0.30	Positive	2.00	1/17/2023	22:28:30	Bldg C	Staff Rm	C	Column	Concrete	Intact	Blue
278	2.10	0.30	Positive	2.00	1/17/2023	22:40:08	Bldg C	Storage	A	Column	Concrete	Intact	White
281	2.60	0.30	Positive	2.00	1/17/2023	22:48:54	Bldg C	Rm #17	C	Column	Concrete	Intact	Gray
289	3.20	0.30	Positive	2.00	1/17/2023	23:00:28	Bldg C	Girls R.R.	A	Wall	Ceramic Tile	Intact	Beige
290	19.50	0.30	Positive	2.00	1/17/2023	23:00:47	Bldg C	Girls R.R.	C	Wall	Ceramic Tile	Intact	Beige
298	1.80	0.30	Positive	2.00	1/17/2023	23:07:01	Bldg C	Girls R.R.	A	Column	Concrete	Intact	Beige
312	2.80	0.30	Positive	2.00	1/17/2023	23:21:58	Bldg C	Exterior	A	Post	Metal	Fair	Blue
313	2.60	0.30	Positive	2.00	1/17/2023	23:22:19	Bldg C	Exterior	B	Post	Metal	Fair	Blue
320	1.60	0.30	Positive	2.00	1/17/2023	23:27:06	Bldg C	Exterior	C	Column	Concrete	Intact	Beige
329	1.60	0.30	Positive	2.00	1/17/2023	23:38:14	Bldg D	Rm #18	A	Column	Concrete	Intact	Gray
335	2.00	0.30	Positive	2.00	1/17/2023	23:41:42	Bldg D	Rm #18	C	Column	Concrete	Intact	Gray
345	1.80	0.30	Positive	2.00	1/17/2023	23:54:43	Bldg D	Rm #20	C	Column	Concrete	Intact	Blue
358	1.00	0.20	Positive	5.00	1/18/2023	0:08:16	Bldg D	Rm #22	A	Column	Concrete	Intact	Blue
363	1.30	0.20	Positive	4.00	1/18/2023	0:14:30	Bldg D	Rm #22	C	Column	Concrete	Intact	Blue
384	23.10	0.30	Positive	2.00	1/18/2023	0:32:37	Bldg D	Girls R.R.	C	Wall	Ceramic Tile	Intact	Yellow
385	23.40	0.30	Positive	2.00	1/18/2023	0:32:58	Bldg D	Girls R.R.	A	Wall	Ceramic Tile	Intact	Yellow
387	1.60	0.30	Positive	2.00	1/18/2023	0:34:10	Bldg D	Girls R.R.	A	Column	Concrete	Intact	Beige
392	2.40	0.30	Positive	2.00	1/18/2023	0:41:06	Bldg D	Ball Rm	C	Column	Concrete	Fair	Beige

LEAD-BASED PAINT INSPECTION POSITIVE RESULTS

Site: Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Project No. 02854-22-002

Prepared for: Bakersfield City School District

Date: January 17 & 18, 2023

No.	Lead Lvl	± Prec	Results	Sec	Date	Time	Building	Room	Side	Component	Substrate	Condition	Color
401	1.60	0.30	Positive	2.00	1/18/2023	0:46:59	Bldg D	Exterior	C	Column	Concrete	Intact	Beige
408	2.70	0.30	Positive	2.00	1/18/2023	0:51:38	Bldg D	Exterior	B	Post	Metal	Fair	Blue
409	1.80	0.30	Positive	2.00	1/18/2023	0:52:13	Bldg D	Exterior	A	Post	Metal	Fair	Blue
415	3.20	0.30	Positive	2.00	1/18/2023	0:55:33	Bldg D	Exterior	A	Column	Concrete	Intact	White
473	1.20	0.20	Positive	5.00	1/18/2023	19:06:08	Bldg R5-R7	Rms 23-25 Ext.	B	Wall	Wood	Fair	Beige
476	1.00	0.20	Positive	5.00	1/18/2023	19:09:39	Bldg R5-R7	Rms 23-25 Ext.	C	Wall	Wood	Intact	Beige
478	1.20	0.20	Positive	5.00	1/18/2023	19:11:03	Bldg R5-R7	Rms 23-25 Ext.	B	Wall	Wood	Fair	Beige
479	1.00	0.20	Positive	5.00	1/18/2023	19:12:02	Bldg R5-R7	Rms 23-25 Ext.	A	Wall	Wood	Intact	Beige
558	3.10	0.30	Positive	2.00	1/18/2023	21:17:55	Bldg A	Admin Office	A	Window Apron	Wood	Intact	White
559	2.20	0.30	Positive	2.00	1/18/2023	21:18:51	Bldg A	Admin Office	A	Door Casing	Wood	Intact	White
560	2.20	0.30	Positive	2.00	1/18/2023	21:19:19	Bldg A	Admin Office	A	Cabinet Door	Wood	Intact	White
582	4.10	0.30	Positive	2.00	1/18/2023	21:43:48	Bldg A	Mail Rm	A	Wall	Concrete	Intact	Beige
588	3.70	0.30	Positive	2.00	1/18/2023	21:49:03	Bldg A	Supervisor	A	Wall	Concrete	Intact	Beige
591	3.00	0.30	Positive	2.00	1/18/2023	21:50:47	Bldg A	Supervisor	A	Wall	Concrete	Intact	Beige
596	3.80	0.30	Positive	2.00	1/18/2023	21:56:04	Bldg A	Foyer	C	Wall	Plaster	Intact	Beige
613	24.90	0.30	Positive	2.00	1/18/2023	22:17:56	Bldg A	Kitchen R.R.	A	Wall	Ceramic Tile	Intact	Yellow

* Indications as to Positive or Negative are based on comparison to 1.0 mg/cm².
 Cal/OSHA regulates operations which disturb lead in any detectable amount.
 Refer to the enclosed Cal/OSHA Regulation 8 CCR 1532.1 for requirements.

Appendix E

Calibration Check Test Results

PROVOST & PRITCHARD CONSULTING

455 W. Fir Avenue
Clovis, California 93611
(559) 449-2700 - Office

PROJECT NO. 02854-22-002

DATE 1/17 & 18/2023

CALIBRATION CHECK TEST RESULTS**TBA FORM #7**

Address / Unit No. Roosevelt Elementary School
2324 Verde Street
Bakersfield, California

Name of Inspector Trevor Brooks

Device Viken Detection Spectrum Analyzer

XRF Serial No. 1029

Calibration Check Tolerance Used 0.8 - 1.2

First Calibration Check

Calibration Acceptable Range: 0.80 - 1.20 mg/cm ²			First Average	Result
First Reading	Second Reading	Third Reading		
1.00	1.00	1.10	1.03	Pass

Second Calibration Check

Calibration Acceptable Range: 0.80 - 1.20 mg/cm ²			First Average	Result
First Reading	Second Reading	Third Reading		
1.00	1.10	1.10	1.07	Pass

Third Calibration Check

Calibration Acceptable Range: 0.80 - 1.20 mg/cm ²			First Average	Result
First Reading	Second Reading	Third Reading		
1.00	1.00	1.00	1.00	Pass

Fourth Calibration Check

Calibration Acceptable Range: 0.80 - 1.20 mg/cm ²			First Average	Result
First Reading	Second Reading	Third Reading		
1.10	1.00	1.10	1.07	Pass

Fifth Calibration Check

Calibration Acceptable Range: 0.80 - 1.20 mg/cm ²			First Average	Result
First Reading	Second Reading	Third Reading		
1.00	1.00	1.10	1.03	Pass

Sixth Calibration Check

Calibration Acceptable Range: 0.80 - 1.20 mg/cm ²			First Average	Result
First Reading	Second Reading	Third Reading		
1.00	1.10	1.10	1.07	Pass

* If the average of the three (3) Calibration readings is outside the specified range, consult the manufacturer's recommendations to bring the instrument back into control. Retest all testing combinations tested since the last successful Calibration Check test.

Appendix F

Lead Hazard Evaluation Form (8552)

LEAD HAZARD EVALUATION REPORT**Section 1 — Date of Lead Hazard Evaluation** 1/17/23 - 1/18/23**Section 2 — Type of Lead Hazard Evaluation (Check one box only)**☒ Lead Inspection ☐ Risk assessment ☐ Clearance Inspection ☒ Other (specify) _____**Section 3 — Structure Where Lead Hazard Evaluation Was Conducted**

Address [number, street, apartment (if applicable)] 2324 Verde Street		City Bakersfield	County Kern	Zip Code 93304
Construction date (year) of structure Various	Type of structure ☐ Multi-unit building ☒ School or daycare ☐ Single family dwelling ☐ Other _____		Children living in structure? ☐ Yes ☐ No ☐ Don't Know	


Section 4 — Owner of Structure (if business/agency, list contact person)

Name Bakersfield City School District		Telephone number 661-631-4600	
Address [number, street, apartment (if applicable)] 130 Baker Street	City Bakersfield	State CA	Zip Code 93305

Section 5 — Results of Lead Hazard Evaluation (check all that apply)

☐ No lead-based paint detected ☒ Intact lead-based paint detected ☒ Deteriorated lead-based paint detected
☐ No lead hazards detected ☐ Lead-contaminated dust found ☐ Lead-contaminated soil found ☐ Other _____

Section 6 — Individual Conducting Lead Hazard Evaluation

Name Trevor Brooks		Telephone number (559) 298-9135	
Address [number, street, apartment (if applicable)] 613 Harvard Avenue, Ste. 201	City Clovis	State CA	Zip Code 93612
CDPH certification number LRC -00000189	Signature 		Date 2/17/23

Name and CDPH certification number of any other individuals conducting sampling or testing (if applicable)

Troy Brooks, Inspector/Assessor, No. 193**Section 7 — Attachments**

- A. A foundation diagram or sketch of the structure indicating the specific locations of each lead hazard or presence of lead-based paint;
B. Each testing method, device, and sampling procedure used;
C. All data collected, including quality control data, laboratory results, including laboratory name, address, and phone number.

First copy and attachments retained by inspector


Second copy and attachments retained by owner

Third copy only (no attachments) mailed or faxed to:

California Department of Public Health
Childhood Lead Poisoning Prevention Branch Reports
850 Marina Bay Parkway, Building P, Third Floor
Richmond, CA 94804-6403
Fax: (510) 620-5656

Appendix G

San Joaquin Valley Air Pollution Control District Standard Forms & Fee Schedule



San Joaquin Valley Unified Air Pollution Control District

COMPLIANCE ASSISTANCE BULLETIN

July 2006 - Revised July 2015

ASBESTOS REQUIREMENTS for DEMOLITION and RENOVATIONS

The San Joaquin Valley Air Pollution Control District (District) Rule 4002 requires compliance with the *National Emission Standards for Hazardous Air Pollutants* (NESHAP) regulation, 40 CFR, Part 61, Subpart M developed by the United States Environmental Protection Agency (EPA). The purpose of this bulletin is to provide an overview of the NESHAP notification, inspection and emission control requirements as they relate to asbestos.

SUMMARY

For any renovation or demolition of a regulated facility, you must do the following:

- **INSPECT:** Conduct a thorough asbestos inspection of the facility before:

Any renovation in which more than 160 square feet or more of building materials, or 260 linear feet or more of pipe insulation, will be disturbed at a regulated facility, or

Any demolition at a regulated facility. (See page 2 for the definition of demolition)

Regulated facilities (Facilities subject to the NESHAP) include all commercial building, residential buildings with more than four dwelling units, other structures and non-portable equipment. A single family dwelling or residential buildings with four or fewer units may be exempt, depending on its past use and future use of the property. The EPA has extensive policy on the NESHAP applicability to these structures. Contact the District to determine if your project is regulated.

- **ASBESTOS ABATEMENT:** If asbestos-containing material (ACM) is discovered, which will be disturbed during a renovation or demolition, they must be removed prior to those projects under most circumstances. Also, Cal-OSHA and Cal-EPA hazardous waste regulations apply in most cases.
- **NOTIFY:** Submit a complete asbestos notification form to the District for any regulated asbestos abatement project or demolition, 10 working days before the activity begins.

A regulated asbestos abatement project is one in which at least 160 Square feet of regulated asbestos-containing building materials (RACM) or 260 linear feet of asbestos-containing pipe insulation is disturbed.

Regulated demolitions are demolitions of “facilities” described above. Notification is required for any regulated demolition, whether or not asbestos is present.

- **FEES:** Pursuant to District Rule 3050, fees must be submitted to the District with all regulated renovations and demolitions notifications. Notifications received without the appropriate fee will be considered incomplete.

DEMOLITION PERMIT RELEASE FORM: Any demolition (regulated or not), for which a building department demolition permit is applicable, requires a completed Demolition Permit Release form. Building officials will require an approved copy of this form, signed by the District, prior to the issuance of a building department demolition permit.

SOME DEFINITIONS: 61.141

1. **FACILITIES** - Facilities subject to the rule include “all structures, installations, buildings and equipment, except for a single family dwelling (SFD) or a residential building with more than four dwelling units. However SFD or building with four or fewer units is also subject to the regulation if:
 - a. It has been used for, or is being removed to be replaced by a non-residential use, or
 - b. It is to be used as a training burn exercise.
 - c. Sites with more than one such building remodeled or demolished are always regulated.
2. **DEMOLITION** - In addition to the total destruction of a structure, demolitions include “the removal of any structural load-bearing member from a facility together with any related handling operations or the intentional burning of a building” (training burns conducted by a fire fighting agency only). Also, the separation of a structure from its foundation prior to relocation is a demolition.
3. **RENOVATION** - means “altering a facility or one or more facility components in any way, including the stripping or removal RACM from a facility component.” Renovations include all activities in which asbestos could be disturbed at a regulated facility, including the clean up and removal of debris from buildings which have burned.
4. **NON-FRIABLE ACM**
 - a. **Category I non-friable** is “asbestos-containing packing, gaskets, resilient floor covering and asphalt roofing products containing more than 1 percent asbestos as determined by PLM testing that, when dry, cannot be crumbled, pulverized, or reduced to powder by hand pressure.”
 - b. **Category II non-friable ACM** is “any ACM, excluding Category I ACM, containing more than 1 percent asbestos as determined by PLM testing, that when dry, cannot be crumbled, pulverized, or reduced to powder by hand pressure.”
5. **RACM - include:**
 - a. **Friable ACM**, which is any material containing more than 1 percent asbestos, as determined by Polarized Light Microscopy (PLM) testing, which, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.
 - b. **Category I nonfriable ACM** that is in poor condition and “has become friable” or “that has or will be subjected to sanding, grinding, cutting, or abrading.”
 - c. **Category II nonfriable ACM** that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of demolition or renovation.

INSPECTION: 61.145 (a)

An asbestos inspection must be performed by the owner or operator prior to:

- a. Any regulated demolition.
- b. Any renovation activity in which more than 160 square feet of building material or 260 linear feet of pipe insulation will be disturbed. An inspection is not necessary, however, if the material to be disturbed is stipulated to be asbestos containing and will be removed in accordance with the NESHAP.

Cal-OSHA regulations in the California Labor Code, 9021.5 through 9021.8, require that asbestos-consulting services (inspections) shall be performed by a person who is certified by Cal-OSHA, and who has taken and passed an EPA-approved Building Inspector course and performs the inspection according to the procedures outlined in the course.

The District requires that inspection reports (surveys) must include:

- a. A schematic showing the location of all tested materials.
- b. The following data for all asbestos-containing materials:
 - 1. The amount and description of each material.
 - 2. Percent asbestos content (10% and below must be point counted).
 - 3. Whether or not the material is friable.

A report of the asbestos inspection (survey) must be received with each demolition notification.

NOTIFICATION 61.145 (b)

A hard copy of the asbestos notification must be submitted to the District, at least 10 working days prior to:

- a. Any regulated demolition (see definitions of *demolition* and *facility* above).
- b. Any renovation in which more than 160 Square feet or 260 Linear feet of RACM will be disturbed.

The District notification form and instructions for filling it out are with the bulletin.

Notifications will not be complete, nor will the 10 working day notice period begin, until all of the required information and fees have been submitted to the District.

Notifications may be submitted by hand delivery, U.S mail or commercial courier. Facsimile is and e-mails are not acceptable methods of delivery.

ASBESTOS ABATEMENT: 61.145 (c)

Asbestos-containing materials discovered during the inspection process, which will be disturbed during renovation or demolition, must be removed properly prior to the demolition or renovation. Employees engaged in asbestos abatement work must be properly trained and equipped for the work in accordance with Cal-OSHA regulations. The Cal-OSHA and NESHAP regulations have specific work practice requirements to be followed during the removal of these materials. Also, the NESHAP regulation and Cal-EPA have waste handling, transportation and disposal requirements applicable that must be adhered to.

SJVUAPCD Rule 3050 (Fees)

A nonrefundable fee must be paid with each demolition and renovation notification, in accordance with SJVUAPCD Rule 3050, Asbestos Removal Fees, which is attached. Fees for asbestos abatement projects are based on the amount of RACM removed. If a project involves at least 160 square feet, 260 linear feet and/or 35 cubic feet or more of RACM, fees for each quantity of material are determined and added together to arrive at the total fee for the project.

DEMOLITION PERMIT RELEASE FORM

CH &S Section 19827.5 requires city or county building officials to have proof of compliance with, or exemption from, the asbestos NESHAP notification requirements before they issues demolition permits. In order to facilitate this, the District has developed a Demolition Permit Release form (attached). For facilities subject to the NESHAP, the District will issue a Demolition Permit Release form once it has been properly noticed of the work that is to occur. *The Signed release form does not guarantee that asbestos abatement or demolition work is being done properly.* For all demolitions, including facilities exempt from the NESHAP, the applicant must fill out the Demolition Permit Release form and have it signed by the District before obtaining a building department demolition permit. The District allows facsimile transmittal of release forms.

RECYCLING/WASTE DISPOSAL

In addition to waste disposal information about RACM, the asbestos notification must identify any building materials, which will be recycled after removal from a project. The name of the recycling contractor and location of such activity must be identified.

No asbestos containing or asbestos contaminated material may be recycled.

If you have any questions, we encourage you to contact one of our three regional offices.

Northern region

Merced, San Joaquin and
Stanislaus Counties

4800 Enterprise Way,
Modesto, CA 95356

(209) 557-6400
Fax (209) 557-6475

Central Region

Fresno, Kings and Madera
Counties

1990 Gettysburg Avenue,
Fresno, CA 93726

(559) 230-6000
Fax (559) 230-6062

Southern Region

Kern and Tulare
Counties

34946 Flyover Court
Bakersfield, CA 93308

(661) 392-5500
Fax (661) 392-5586

San Joaquin Valley Unified Air Pollution Control District

ASBESTOS DEMOLITION/RENOVATION NOTIFICATION FORM GENERAL INFORMATION

The Asbestos NESHAP, 40 CFR Part 61, Subpart M, requires written notification of demolition or renovation operations under Section 61.145. The form below may be used to fulfill this requirement. Only complete notification forms are acceptable. Incomplete notification may result in enforcement action.

The notification must be postmarked or delivered no later than ten working days prior to the beginning of the asbestos removal activity (dates specified in section 7) or demolition (dates specified in Section 8). Please submit this form and corresponding fees to the appropriate office:

For Fresno, Madera and Kings Counties:

SJVUAPCD

Attention: Asbestos Program

1990 E. Gettysburg Avenue

Fresno, California 93726

For San Joaquin, Stanislaus and Merced Counties:

SJVUAPCD

Attention: Asbestos Program

4800 Enterprise Way

Modesto, CA 95356

For Tulare and Kern Counties:

SJVUAPCD

Attention: Asbestos Program

34946 Flyover Court

Bakersfield, CA 93308

INSTRUCTIONS

1. Type of Notification: Check Original if the notification is a first time or original notification; Revised (Dates) if the notification is a revision dates only; Revised (Others) if the notification is a revision of other data (highlight changes); Canceled if the project has been canceled; or "Courtesy" if the activity is not regulated. When submitting a revised notification add a number (starting with the number 1) after "revised" to differentiated between revisions.
2. Type of Operation: Check for facility demolition, ordered demolition, facility renovation, or Emergency renovations.
3. Facility Description: Provide detailed information on the areas being renovated or demolished. If applicable, provide the floor numbers and room numbers where renovations are to be conducted.

Site Location: Provide information needed to locate the site in the event that the address alone is inadequate.

Present Use/Prior Use/Future Use: Describe the primary use of the facility or enter the following: Hospital; School; Public Building; Office; Industrial; University or College; Ship; Commercial; Residence; or Subdivision.
4. Is Asbestos Present? Answer "Yes" or "No" regardless of the amount or type of asbestos.
5. Include a complete asbestos report (survey) that accurately depicts amounts, percent, analytical method used
6. Approximate Amount of Asbestos including: (1) Regulated ACM to be removed (including non-friable ACM to be sanded, ground or abraded); (2) Category III ACM not removed; and for "courtesy notices" (3) Non-friable ACM to be removed. Enter amounts in square feet or linear feet. Describe volume in cubic feet only if the amount cannot be approximated in square feet or linear feet.
7. Removal Dates (MM/DD/YY): Enter scheduled dates for asbestos removal work. Asbestos removal work includes any activity, including site preparation, which will break up, dislodge or disturb asbestos material.
8. Demo/Renovation Dates (MM/DD/YY): Enter scheduled dates for beginning and ending the planned demolition or renovation.
9. FACILITY OWNER INFORMATION: Enter the name of the site supervisor and contact person for the notification. If additional parties share responsibility for the site, demolition activity, renovations or ACM removal, include complete information (including name, address, contact person and telephone number) below.
10. Removal Contractor: Contractor hired to remove asbestos.
11. Other Contractor: Demolition contractor, general contractor, or any other person, who leases, operates, controls or supervises the site.

12. Description of Planned Demolition or Renovation Work and Method(s) to be Used: Include in this area a description of the demolition and renovation techniques to be used and the types of facility components and materials which will be affected by this work.
13. Description of Engineering Controls and Work Practices to be Used to Prevent Emissions at the Site: Describe the work practices and engineering controls selected to ensure compliance with the requirements of the regulations, including both asbestos removal and waste-handling emission control procedures.
14. ACWM Transporter(s): Enter the names, addresses, contact persons and telephone numbers of the persons or companies responsible for transporting ACM from the removal site to the waste disposal site. If the removal contractor or owner is the waste transporter, state "same as owner" or "same as removal contractor." If additional parties are responsible include complete information on an additional sheet submitted with the form.
15. ACWM Disposal Site: Identify the waste disposal site, including the complete name, location and telephone number of the facility. If ACM is to be disposed of at more than one site, provide complete information on an additional sheet submitted with the form.
16. Recycling of Waste Material (No ACM may be recycled): Identify the site, including the complete name, location and telephone number of the facility, where any material is to be taken for recycling.
17. If Demolition Ordered by a Government Agency, Please Identity the Agency: Provide the name of the responsible official, title and agency, authority under which the order was issued, the dates of the order and the dates of the ordered demolition. A copy of the order shall be attached to the notification.
18. For Emergency Renovation: Provide the date and time of the emergency, a description of the event and a description of unsafe conditions, equipment damage or financial burden resulting from the event. The information should be detailed enough to evaluate whether a renovation falls within the emergency exception.
19. Description of Procedures to be Followed in the Event that Unexpected Asbestos is Found or Previously Nonfriable Asbestos Material Becomes Crumbled, Pulverized, or Reduced to Powder: provide adequate information to demonstrate that appropriate actions have been considered and can be implemented to control asbestos emissions adequately, including at a minimum, conformance with applicable work practice standards.
20. Certification of Presence of Trained Supervisor: The notifier must certify that a person trained in asbestos-removal procedures will supervise the demolition or renovation. The supervisor is responsible for the activity on-site. Evidence that the supervisor has completed the training must be available for inspection during normal business hours.
21. Verification: Please certify the accuracy and completeness of the information provided by signing and dating the notification form.

RULE 3050 ASBESTOS REMOVAL FEES (Adopted May 21, 1992; Amended December 17, 1992; Amended February 18, 1993; Amended August 21, 1997; Amended January 17, 2008; Amended April 16, 2015; Amended April 19, 2018, effective July 1, 2019)

Note: This rule is effective on and after July 1, 2019.

1.0 Applicability

The National Emission Standards for Hazardous Air Pollutants (NESHAP), adopted by reference as District Rule 4002, and therefore these fees are applicable to:

- 1.1 all demolitions whether or not asbestos is present; and
- 1.2 renovations in which 260 linear feet, 160 square feet, or 35 cubic feet or more of regulated asbestos containing materials are disturbed.

2.0 Fees

Every person filing notification of an asbestos removal project, subject to the provisions of Rule 4002 (National Emissions Standards for Hazardous Air Pollutants), shall pay upon filing, the nonrefundable fee prescribed herein. The total fee for any project shall be the sum of the applicable fee components below.

Demolition or Renovation:

Linear Feet	Square Feet	Cubic Feet	Fee Component (\$)
0 - 259*	0 - 159*	0 - 34*	188
260 - 499	160 - 499	35 - 109	188
500 - 999	500 - 999	110 - 218	317
1,000 - 2,499	1,000 - 2,499	219 - 547	634
2,500 - 4,999	2,500 - 4,999	548 - 1,094	1,054
5,000 - 9,999	5,000 - 9,999	1,095 - 2,188	1,580
10,000 or more	10,000 or more	2,189 or more	2,107

* Demolition only. Does not apply to renovations.

San Joaquin Valley Unified Air Pollution Control District

Asbestos Notification

Operator Project #	Postmark Date	Received Date	Fee Received \$	District Notification #
Completed by: _____ Company: _____ Phone: _____				
1. TYPE OF NOTIFICATION:	Original ☐	Revised (Dates) ☐	Revised (Others) ☐ (Highlight Changes)	Canceled ☐ Courtesy ☐
2. TYPE OF OPERATION:	Demo ☐	Ordered Demo ☐	Renovation ☐	Emergency Renovation ☐
3. FACILITY DESCRIPTION: (Include building name, number, and floor or room number)				
Building Name:		Lease Name:		
Address:		City:	County:	
Site Location on property:				
Is demolition in preparation for construction? ☐ Yes ☐ No		Building Size: Sq Ft	Number of Floors:	Age:
Present Use:		Prior Use:	Future Use:	
4. IS ASBESTOS PRESENT: ☐ Yes ☐ No SURVEY COMPLETED: ☐ Yes ☐ No ☐ TO BE CONDUCTED				
5. A COPY OF THE INSPECTION REPORT WITH PROCEDURE, INCLUDING ANALYTICAL METHOD USED TO DETECT THE PRESENCE OF ASBESTOS MATERIAL MUST BE INCLUDED WITH THIS NOTIFICATION.				
6. Approximate amount of asbestos, including:		(1) RACM to be removed	Friable ACM (<1%)	(2) Non-friable ACM not to be removed Category I Category II
1. Regulated ACM to be removed.				(3) Non-friable ACM to be removed (Courtesy) Category I Category II
2. Category I/II ACM not removed.				
3. Non-friable ACM to be removed.				
Pipes (Linear Feet)				
Surface Area (Square Feet)				
Volume (Cubic Feet-If Lft Or Sqft Could Not Be Measured)				
ASBESTOS REMOVED FROM		Surfaces: ☐ Yes ☐ No	Pipes: ☐ Yes ☐ No	Components: ☐ Yes ☐ No
AMOUNT OF EACH TYPE OF ASBESTOS (in square feet)		Acoustic ceiling	Sheet Vinyl	Insulation
				Fire Proofing
				Ducting
				Stucco
				Mastic
Floor Tile (VAT)	Dry Wall	Plaster	Transite	Roofing
				Others (Describe)
7. REMOVAL DATES: (MM/DD/YY)		Start:	Complete:	
8. DEMO/RENOVATION DATES (MM/DD/YY)		Start:	Complete:	
9. FACILITY OWNER INFORMATION:				
Address:		City:	State:	Zip:
Contact:	Telephone:	Site Supervisor:		
10. REMOVAL CONTRACTOR:		CAL-OSHA REGISTRATION #:		
Address:		City:	State:	Zip:
Contact:	Telephone:	Site Supervisor:		
11. OTHER CONTRACTOR:		CSLB LICENSE #:		
Address:		City:	State:	Zip:
Contact:	Telephone:	Site Supervisor:		

12. DESCRIPTION OF PLANNED DEMOLITION OR RENOVATION WORK, AND METHOD(S) TO BE USED:			
13. DESCRIPTION OF WORK PRACTICES AND ENGINEERING CONTROLS TO BE USED TO PREVENT ASBESTOS EMISSIONS AT THE SITE:			
14. ACWM WASTE TRANSPORTER:			
Address:		City:	State: Zip:
Contact:		Telephone:	
15. ACWM WASTE DISPOSAL SITE:			
Address:		City:	State: Zip:
Contact:		Telephone:	
16. RECYCLING OF WASTE MATERIAL (<u>NO ACM MAY BE RECYCLED</u>):			
Name:			
Location:		City:	State: Zip:
Contact:		Telephone:	
17. DEMOLITION ORDERED BY A GOVERNMENT AGENCY; identify the agency, attach copy of the order)			
Name:		Title:	
Authority:			
Date of order (MM/DD/YY):		Date order to begin: (MM/DD/YY):	
18. FOR EMERGENCY RENOVATIONS:			
GIVE THE NAME AND PHONE NUMBER OF THE PERSON DECLARING/AUTHORIZING THE EMERGENCY, DATE AND HOUR OF EMERGENCY AND DESCRIPTION OF THE SUDDEN, UNEXPECTED EVENT:			
EXPLANATION OF HOW THE EVENT CAUSED UNSAFE CONDITIONS OR WOULD CAUSE EQUIPMENT DAMAGE OR AN UNREASONABLE FINANCIAL BURDEN:			
19. DESCRIPTION OF PROCEDURES TO BE FOLLOWED IN THE EVENT THAT UNEXPECTED ASBESTOS IS FOUND OR PREVIOUSLY NON-FRIABLE ASBESTOS MATERIAL BECOMES CRUMBLED, PULVERIZED, OR REDUCED TO POWDER:			
20. IF RACM IS PRESENT AN INDIVIDUAL TRAINED IN THE PROVISIONS OF THIS REGULATION (40 CFR., PART 61, SUBPART M) WILL BE ON SITE DURING THE DEMOLITION OR RENOVATION AND EVIDENCE THAT THE REQUIRED TRAINING HAS BEEN ACCOMPLISHED BY THIS PERSON WILL BE AVAILABLE FOR INSPECTION.			
21. I CERTIFY THAT THE ABOVE INFORMATION IS CORRECT TO THE BEST OF MY KNOWLEDGE.			
PRINT NAME OF OWNER/OPERATOR		SIGNATURE OF OWNER/OPERATOR	DATE

Category I non-friable asbestos-containing material (ACM) means asbestos-containing packings, gaskets, resilient floor covering, and asphalt roofing products containing more than 1 percent asbestos.

Category II non-friable ACM means any material, excluding Category I non-friable ACM, containing more than 1 percent asbestos.

Regulated asbestos-containing material (RACM) means (a) Friable asbestos material, (b) Category I nonfriable ACM that has become friable, (c) Category I nonfriable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading, or (d) Category II nonfriable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of demolition or renovation operations regulated by this subpart.

SAN JOAQUIN VALLEY UNIFIED AIR POLLUTION CONTROL DISTRICT

☐ **Northern Region Office**
4800 Enterprise Way
Modesto, CA 95356-8718
(209) 557-6400 ♦ FAX (209) 557-6475
(San Joaquin, Stanislaus and Merced Counties)
asbestos.north@valleyair.org

☐ **Central Region Office**
1990 East Gettysburg Avenue
Fresno, CA 93726-0244
(559) 230-6000 ♦ FAX (559) 230-6062
(Fresno, Madera and Kings Counties)
asbestos.central@valleyair.org

☐ **Southern Region Office**
34946 Flyover Court
Bakersfield, CA 93308-9725
(661) 392-5500 ♦ FAX (661) 392-5585
(Tulare and Kern Counties)
asbestos.south@valleyair.org

DEMOLITION PERMIT RELEASE

The purpose of this form is to verify compliance with or exemption from the National Emission Standards for Hazardous Air Pollutants (NESHAP) asbestos **notification** requirements. It is the Applicant's responsibility to obtain the required signature from the District and return this form to the appropriate city or county building department **prior to obtaining a demolition permit**.

Project Description

Job Site Address: _____	City: _____	Zip Code: _____
Owner's name: _____	Telephone: _____	Fax: _____
Owner's Address: _____	City: _____	Zip Code: _____
Contractor's Name: _____	Telephone: _____	Fax: _____
Contractor's Address: _____	City: _____	Zip Code: _____
Contact's Email: _____		

1. Structure(s) being demolished:	Yes	No	2. Proposed project:	Yes	No
One structure (non-commercial), with four or fewer units.	☐	☐	Single Family Dwelling	☐	☐
Other (describe): _____			Subdivision, Retail or Commercial Project	☐	☐
Is demolition by intentional burning?	☐	☐	Public Project (School, Highway, etc..)	☐	☐
			Other (describe): _____		

Comments: _____

Signature of applicant _____ Title _____ Date _____

FOR SJVUAPCD USE ONLY

☐ This certifies that the demolition applicant has satisfied the APCD's notification requirements. The APCD allows the demolition to proceed on or after _____

☐ This certifies that the Demolition application is exempt from the APCD's requirements.

District approval on this form only indicates compliance with or exemption from the NESHAP notification requirements. Enforcement action will be taken if asbestos NESHAP violations are found at the project.

Further, there are other agencies that regulate the handling and disposal of ACM, such as OSHA, Cal-OSHA, and DTSC regardless of NESHAP applicability to your property.

Comments: _____

Printed Name: _____ Title: _____

Approval Signature: _____ Date: _____

Appendix H

Regulatory Resource List for Asbestos & Lead

REGULATORY RESOURCE LIST – ASBESTOS

California Occupational Safety & Health Administration (Cal/OSHA):

8 CCR 1529 Asbestos in Construction Standard

Websites: <http://www.dir.ca.gov/title8/1529.html> (Regulation)

<http://www.dir.ca.gov/dosh/ACRU/ACRUhome.html> (Report of Use)

Summary of Regulation:

1. Regulates Friable and Non-Friable ACBMs which contain asbestos in excess of 0.1% by weight.
2. Applicable to workers engaged in disturbance of ACBM (>1.0%) and ACCM (0.1 - 1.0%) and workers in close proximity to the work area.
3. Contractors who disturb in excess of 100 sq. ft. must be a “Certified Abatement Contractor” with the State of California Contractors State License Board and have an ASB attachment on their license with the exception of flooring, roofing, and asbestos-cement products.
4. Contractors that disturb less than 100 sq. ft. must also file a “Report of Use” with the State of California.
5. Contractors who disturb any amount of ACBM must ensure worker protection by providing accredited training, medical surveillance, PPE and a negative exposure assessment.
6. All work must be conducted in accordance with the regulation.

NESHAP Regulation – United States Environmental Protection Agency:

40 CFR Part 6, Subpart M- National Emission Standard for Asbestos

Website: <http://www.epa.gov/asbestos/pubs/asbreg.html>

Summary of Regulation:

1. Regulates renovation projects on all commercial structures, certain residential properties, and multi-family properties with four (4) or more units.
2. Has jurisdiction over projects involving disturbance of greater than 160 sq. ft. or 260 lin. ft. of ACBM (>1.0%) or “Presumed Asbestos-Containing Material.”
3. Regulates all demolition, regardless of whether asbestos is present on targeted structures.
4. Enforced by local air quality management district or EPA region office in non-delegated districts.

San Joaquin Valley Air Pollution Control District

Website: <http://www.valleyair.org/busind/comply/asbestosbultn.htm>

Summary of Regulation:

1. Enforces NESHAP regulation.
2. Requires filing of completed notification, payment of fees, and ten (10) day waiting-period prior to commencing abatement related work in excess of threshold levels of RACM, non-friable ACBM which may become friable, and for all demolition activities.
3. Requires that an asbestos survey be conducted and prepared by a Certified Asbestos Consultant and that a copy be submitted to the air district along with the completed notification.

REGULATORY RESOURCE LIST – LEAD

California Occupational Safety & Health Administration (Cal/OSHA): 8 CCR 1532.1 (Lead in Construction Standard)

Website: http://www.dir.ca.gov/title8/1532_1.html

Summary of Regulation:

1. Regulates all work-related activities in which workers may be exposed to lead and any workers in close proximity to the work area.
2. Regulated levels of lead are based on level of training and experience of contractor and maintenance of historical data based on initial exposure assessments for individual “trigger tasks”.
3. Contractors that disturb in excess of 100 sq. ft. must file a “Temporary Jobsite Notification” with the local Cal/OSHA Compliance Office at least 24 hours prior to start of work.
4. Contractor shall be licensed with the State of California, Contractors State License Board and have provided all employees who will engage in the work or enter a lead “regulated area” with level of training commensurate with anticipated exposure level.
5. Employees are required under certain circumstances to be certified by the State of California Department of Public Health (CDPH) to conduct lead work.
6. The employer or contractor must send notification prior to the start of the job unless:
 - the lead content of the material disturbed is less than 0.5 percent, (5,000 parts per million) or 1.0 mg./cm²;
 - the amount of lead-containing material is less than 100 square feet or 100 linear feet;
 - the only task is torch cutting or welding for no longer than one hour per shift.
7. Contractors who disturb any amount of lead must ensure worker protection by providing accredited training, medical surveillance, PPE and conduct an initial exposure assessment per “trigger task”.
8. Employers are required to conduct biological monitoring on employees based on the schedule mandated by OSHA.

State of California – Department of Public Health – Title 17, Division 1, Chapter 8

Website: <http://www.cdph.ca.gov/programs/CLPPB/Documents/Title17.pdf>

Summary of Regulation:

1. Regulates projects involving disturbance of “Lead-Based Paint” on public and residential structures.
2. If conducting “Abatement”, defined as work designed to reduce or eliminate lead hazards, only CDPH accredited workers and supervisor may conduct the work, and a completed 8551 form shall be filed with CDPH a minimum of five (5) days prior to commencing abatement operations.
3. For work classified as “Abatement”, a Lead Clearance is required. Standard includes a minimum standard for performance of work and states that all lead related work shall be conducted in accordance with the HUD Guidelines.

HUD Guidelines

Website:

http://portal.hud.gov/hudportal/HUD?src=/program_offices/healthy_homes/lbp/hudguidelines

A standard developed by the Department of Housing and Urban Development which has generally been adopted as “state of the art” in the lead industry. This standard has been adopted by the State of California as a regulatory requirement.

U.S. Environmental Protection Agency Repair, Renovation & Painting Rule


Website: www.epa.gov/lead/pubs/renovation.htm

Summary of Regulation:

1. Regulates all contractors that engage in work involving disturbance of lead in pre-1978 residential housing and child-occupied facilities.
2. Requires that painted finishes to be impacted by proposed scope of work must be tested to determine if they are classified as “Lead-Based Paint” or presumed as such.
3. Requires that contractors utilize lead safe work practices.
4. In California, only a CDPH certified Inspector/Assessor may test for the presence of Lead-Based Paint.
5. Contractors must provide a copy of the “Renovate Right” pamphlet to owners or occupants of properties prior to commencing work which falls under the regulation.
6. Each job regulated under the RRP requires at least one RRP Certified Renovator be present on any job which falls under the regulation. In addition, each firm must also be RRP certified.
7. Regulation allows contractors to conduct their own clearance test known as a “Cleaning Verification”.
8. The homeowner may elect to hire a ‘third-party’ consultant to conduct clearance testing on their behalf.


Appendix I

**Professional & Laboratory
Certifications**

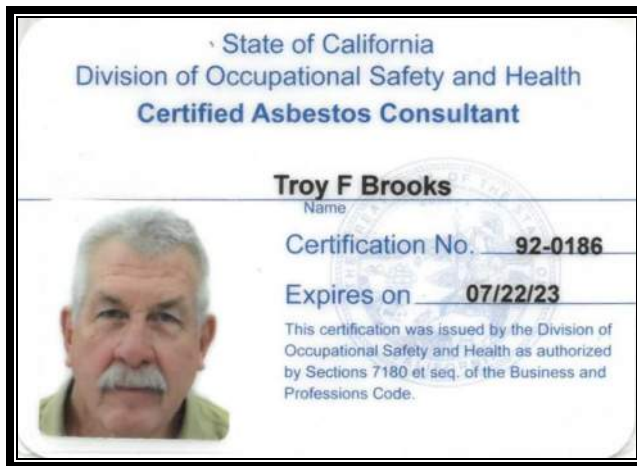

Troy F. Brooks
Certified Asbestos Consultant

LEAD-RELATED CONSTRUCTION CERTIFICATE

INDIVIDUAL:

Troy Brooks

CERTIFICATE TYPE:

Lead Project Monitor

Lead Supervisor

Lead Inspector/Assessor

NUMBER:

LRC-00000194

LRC-00000192

LRC-00000193


EXPIRATION DATE:

10/3/2023

10/3/2023

7/21/2023

Disclaimer: This document alone should not be relied upon to confirm certification status. Compare the individual's photo and name to another valid form of government issued photo identification. Verify the individual's certification status by searching for Lead-Related Construction Professionals at www.cdph.ca.gov/programs/clppb or calling (800) 597-LEAD

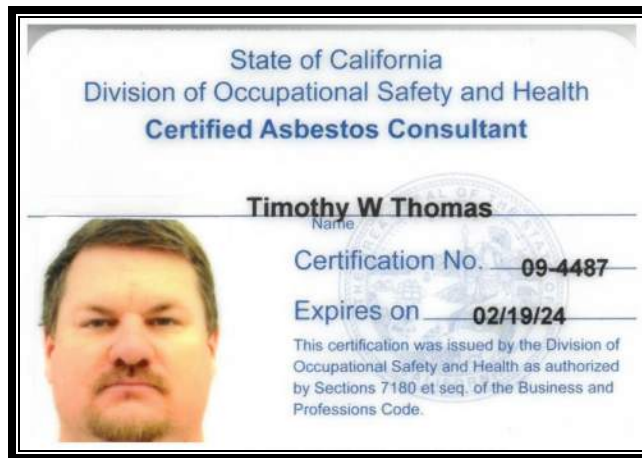

Timothy W. Thomas
Certified Asbestos Consultant

LEAD-RELATED CONSTRUCTION CERTIFICATE

INDIVIDUAL:



Timothy Thomas

CERTIFICATE TYPE:

Lead Inspector/Assessor

NUMBER:

LRC-00008088

EXPIRATION DATE:

2/3/2023

Disclaimer: This document alone should not be relied upon to confirm certification status. Compare the individual's photo and name to another valid form of government issued photo identification. Verify the individual's certification status by searching for Lead-Related Construction Professionals at www.cdph.ca.gov/programs/clppb or calling (800) 597-LEAD



STATE OF CALIFORNIA
DEPARTMENT OF PUBLIC HEALTH



LEAD-RELATED CONSTRUCTION CERTIFICATE

INDIVIDUAL:



Trevor Brooks

CERTIFICATE TYPE:

Lead Sampling Technician

NUMBER:

LRC-00000189

EXPIRATION DATE:

6/15/2023

Disclaimer: This document alone should not be relied upon to confirm certification status. Compare the individual's photo and name to another valid form of government issued photo identification. Verify the individual's certification status by searching for Lead-Related Construction Professionals at www.cdph.ca.gov/programs/clppb or calling (800) 597-LEAD

LEAD-RELATED CONSTRUCTION CERTIFICATE

INDIVIDUAL:



Gregory Feaver

CERTIFICATE TYPE:

Lead Sampling Technician

NUMBER:

LRC-00009609

EXPIRATION DATE:

1/13/2023

Disclaimer: This document alone should not be relied upon to confirm certification status. Compare the individual's photo and name to another valid form of government issued photo identification. Verify the individual's certification status by searching for Lead-Related Construction Professionals at www.cdph.ca.gov/programs/clppb or calling (800) 597-LEAD

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2017

NVLAP LAB CODE: 200811-0

EMSL Analytical, Inc.
Phoenix, AZ

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*


Asbestos Fiber Analysis

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2022-04-01 through 2023-03-31

Effective Dates

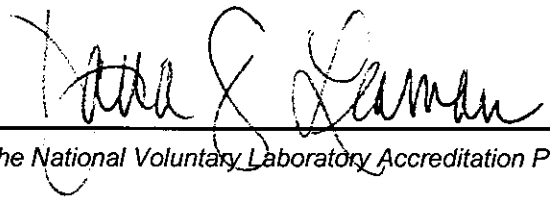


For the National Voluntary Laboratory Accreditation Program

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

EMSL Analytical, Inc.

3356 West Catalina Drive

Phoenix, AZ 85017

Ms. Jillian Chesson

Phone: 602-276-4344

Email: jchesson@emsl.com

<http://www.emsl.com>

ASBESTOS FIBER ANALYSIS

NVLAP LAB CODE 200811-0

Bulk Asbestos Analysis

Code


Description

18/A01

EPA -- 40 CFR Appendix E to Subpart E of Part 763, Interim Method of the Determination of Asbestos in Bulk Insulation Samples

18/A03

EPA 600/R-93/116: Method for the Determination of Asbestos in Bulk Building Materials



For the National Voluntary Laboratory Accreditation Program

ASBESTOS ABATEMENT STANDARD FORMS**GENERAL****1.01 THE FOLLOWING LIST OF ENCLOSED FORMS WILL BE UTILIZED IN CONJUNCTION WITH THE PROJECT.**

FORM NO	DESCRIPTION	SUBMITTAL SCHEDULE
1	Asbestos Contractor Information Detail (Enclosed)	With Material Submittals
	Emergency Information (Contractor to Provide)	Prior to Commencing Work
2	Authorized Project Personnel (Enclosed)	Prior to Commencing Work
3	Medical Testing Certification (Enclosed)	Prior to Commencing Work
	Respirator Fit Test Certification (Contractor to Provide)	Prior to Commencing Work
4	Certificate of Worker's Acknowledgment (Enclosed)	Prior to Commencing Work
5	Asbestos Waste Disposal Site (Enclosed)	Prior to Commencing Work
6	Certificate of Visual Inspection (Enclosed)	Use for each visual clearance

All submittals shall be approved prior to commencing work, after award.

FORM 1

ASBESTOS CONTRACTOR INFORMATION DETAIL

Contracting Firm:_____

Address:_____

Organizational Status: Corporation____ Partnership____ Individual____

Number of years firm in business:_____

Previous Company Names:_____ Dates:_____

_____ Dates:_____

Names and Positions of Firm Principals:

Name of Bonding Company:_____

Have you ever refused to sign a contract of your original bid_____

Have you ever defaulted on a contract_____

(If yes to either, attach statement with history of each event)

Bidder may be required to submit financial information at owners request.

List 5 projects of similar size and character which your company has completed with the last three years.

<u>Project Name, location</u>	<u>Owner (name, address, tel.)</u>
1. _____	_____
2. _____	_____
3. _____	_____
4. _____	_____

<u>Contract Amount</u>	<u>Completion Date</u>	<u>Consultant/Architect</u>
1. _____	_____	_____
2. _____	_____	_____
3. _____	_____	_____
4. _____	_____	_____

(Attach separate sheet with additional information as necessary)

Names of key personnel to participate in this project:

Project Manager:_____ No. yrs. Experience_____

Superintendent:_____ No. yrs. Experience_____

Foreman: _____ No. yrs. Experience_____

Authorized signature Title Date

FORM 2

AUTHORIZED PROJECT PERSONNEL

I certify that the following _____ (enter number) workers (whether employees or sub-contractors) used by _____ (company name) in the performance of any asbestos abatement activities for _____ (client name) on Project _____ have met all training, licensing and certification requirements of the Federal Government, and the State, County and City in which the work is taking place.

Attached are photocopies of all required training and licensing certificates for the workers listed.

Employee Name	Social Security Number
_____	XXXX - XX - _____
_____	XXXX - XX - _____
_____	XXXX - XX - _____
_____	XXXX - XX - _____
_____	XXXX - XX - _____
_____	XXXX - XX - _____
_____	XXXX - XX - _____
_____	XXXX - XX - _____
_____	XXXX - XX - _____
_____	XXXX - XX - _____
_____	XXXX - XX - _____
_____	XXXX - XX - _____
_____	XXXX - XX - _____

_____	_____	_____
Authorized signature	Company Name	Date

FORM 3

MEDICAL TESTING CERTIFICATION

I certify that the following _____ (enter number) personnel (whether employees, company officers of subcontractors) used by _____ (company name) in the performance of any asbestos abatement activities for _____ (client name) on Project _____ have received the necessary tests as specified in Federal Regulation 29 CFR Parts 1910.134, 1910.1001 and 1926.1101, and have had administered to them the Initial Medical Questionnaire included in Appendix D of CFR 1926.1101 and are qualified to wear respirators and to work on asbestos abatement projects.

Employee Name	Social Security Number	Date of Last Exam
_____	XXXX- XX - _____	_____
_____	XXXX- XX - _____	_____
_____	XXXX- XX - _____	_____
_____	XXXX- XX - _____	_____
_____	XXXX- XX - _____	_____
_____	XXXX- XX - _____	_____
_____	XXXX- XX - _____	_____
_____	XXXX- XX - _____	_____
_____	XXXX- XX - _____	_____
_____	XXXX- XX - _____	_____
_____	XXXX- XX - _____	_____
_____	XXXX- XX - _____	_____

_____	_____	_____
Date	Physician's Signature	License Number

(NOTE: Consultant reserves the right to accept photocopies of Contractor's own physician-signed forms in lieu of this certification if said forms provide the information required above.)

FORM 4
 CERTIFICATE OF WORKER'S ACKNOWLEDGMENT

Project Name _____ Date _____

Project Address _____

Contractor's Name _____

Working with asbestos can be dangerous. Inhaling asbestos fibers has been linked with various types of cancer. If you smoke and inhale asbestos fibers, then the chance that you will develop Lung Cancer is greater than that of the non-smoking public.

Your employer's contract with the Owner for the above project requires that:

1. You be supplied with the proper respirator and be trained in its use.
2. You be trained in safe work practices and in the use of the equipment found on the job.
3. You receive a complete medical examination in accordance with 29 CFR 1910.1001.

These things are to have been done at no cost to you.

Respiratory Protection: You must have been trained in the proper use of respirators, and informed of the type respirator to be used on the above referenced project. You must be able to access a copy of the written respiratory protection manual maintained by your employer. You must be equipped at no cost with the respirator and miscellaneous cartridges, etc., to be used on the above project.

Training Course: You must have been trained in the dangers inherent in handling asbestos and breathing asbestos dust and in proper work procedures and personal and area protective measures. The topics covered in the course must have included the following:

1. Physical characteristics of asbestos
2. Health hazards associated with asbestos
3. Respiratory protection
4. Use of protective equipment
5. Pressure Differential Systems
6. Work practices including hands on or on-the-job training
7. Personal decontamination procedures
8. Air monitoring, personal and area

Medical Examination: You must have had a medical examination within the past 12 months at no cost to you. This examination must have included: health history, pulmonary function tests and may have included an evaluation of a chest x-ray.

By signing this document, you are acknowledging only that the Owner of the building you are about to work in has advised you of your rights to training and protection relative to your employer, the Contractor.

Signature _____ Soc. Sec. # _____

Printed Name _____ Witness _____

FORM 5
ASBESTOS WASTE DISPOSAL SITE

Project # _____ Title _____

Disposal Site Name _____

Site Identification Number _____

Site Supervisor Name _____

Address _____

Telephone (_____) _____ - _____

Owner/Operator Name _____

Address _____

Telephone (_____) _____ - _____

CONTRACTOR'S CERTIFICATION

The appropriate regulatory agency was queried, and the site named above was found to be authorized to accept asbestos waste.

Agency queried _____ Date _____

Agency Official Name _____

Telephone Number _____

Contractor's Signature _____

FORM 6
CERTIFICATE OF VISUAL INSPECTION

Date: _____, 202__ Project No. _____
Project: _____
Location: _____

CONTRACTOR ACKNOWLEDGMENT:

In accordance with the Project Specifications, the Contractor hereby certifies that he has visually inspected the Work Area and has found no dust, debris or residue containing asbestos.

The Contractor certifies that he has completed all work at this location as required by project documents and in compliance with applicable law.

By: Signature: _____ Date _____, 202__
Print Name: _____, Project Supervisor
Contractor Firm Name: _____

PROJECT ADMINISTRATOR CERTIFICATE:

The Project Administrator hereby certifies that he has accompanied the Contractor on his visual inspection and verifies that this inspection has been thorough and to the best of his knowledge and belief, the Contractor's Certification above is a true and honest one.

By: Signature: _____ Date _____, 202__
Print Name: _____, Project Administrator
Contractor Firm Name: _____ Title _____

Comments: _____

Final Air Clearance Performed: Yes__ No __ No. of Samples:___ Analysis: PCM___ TEM___

END OF SECTION

**RENOVATION OPERATIONS WITH LEAD-CONTAINING & LEAD-BASED PAINT
PART 1– GENERAL**

DIVISIONS 00 & 01 ARE A PART OF THIS SECTION

General**1.01 SUMMARY OF SCOPE OF WORK**

The work under this section covers the disturbance of lead-based paint and lead-containing paint during planned renovation operations involving those structures at the buildings being impacted by the proposed scope of work as indicated on the project design documents. Lead-containing paint, glazing, and surface coatings are herein identified as those which contain any detectable amount of lead in accordance with 8 CCR 1532.1, and 29 CFR 1926.62. Lead-Based Paint (LBP) is herein identified as paint which contains in excess of 5,000 per million of lead (1.0 mg/cm by weight) per 8 CCR 1532.1, Title 17, CCR Division 1, Chapter 8.

The work to be performed as part of the project includes removal and/or stabilization of painted finishes attached to those structures at the subject site to be impacted by planned renovation operations which are in non-intact, peeling, or poor condition. The work may also involve stabilization of non-intact painted finishes on buildings which are to remain, and which may undergo renovation as part of the project.

The Contractor shall provide all labor, materials, tools, equipment, supervision, and incidentals necessary to perform the work which includes disturbance of lead-based or lead-containing paint in accordance with this specification, all other project design documents, and applicable regulations. Contractor shall thoroughly review this specification, and all other project design documents to determine work which will impact painted finishes or surface coatings.

Unless indicated otherwise, the Contractor shall consider all painted surfaces, coatings, and ceramic glazing which will be impacted by work associated with the project as lead-containing except where confirmed as including "Lead-Based Paint" based on the previous lead-based paint inspection prepared by TBA/P&P and dated February 16, 20223 and shall conduct all work operations in accordance with these specifications, and all applicable local, state, and federal regulations for work involving disturbance of lead-containing materials.

The project includes renovation of structures at the subject site which include painted finishes at specified interior and exterior locations as described herein, in the previous lead inspection report (dated 10/22/22) and in the project design documents. The Contractor shall conduct work operations based upon review of project design

documents and a site visit to observe existing conditions which affect completion of the work.

All work involving disturbance of lead is to be conducted in accordance with all local, state, and federal regulations and statutes having jurisdiction over the work. Contractors shall thoroughly review all design documents to determine where lead-containing finishes will be impacted based on the scope of work.

Painted finishes determined to contain lead at levels classified as "Lead-Based Paint" shall be treated in accordance with local, state and federal regulations regarding work involving disturbance of "Lead-Based Paint" and/or "Lead-Containing Paint". Refer to the previous lead inspection report for locations of painted finishes identified as "Lead-Based Paint". The Contractor shall utilize the information contained in the lead inspection report to determine locations of lead-containing and/or lead-based paint represented by painted finishes affixed to buildings at the subject site to be impacted by the work under the Agreement.

The Contractor shall utilize means and methods as herein defined and as required under applicable regulations to complete the specified work. Work involving disturbance of painted shall be performed in a manner which will not expose workers or others to levels of airborne lead above regulatory levels. The Contractor shall conduct "trigger task" monitoring as prescribed by Cal/OSHA to demonstrate that proposed methods and procedures have not resulted in airborne levels above the OSHA "Action Level" and "Permissible Exposure Limit".

All loose, peeling, or painted finishes determined to include lead-based paint or represented by painted finishes determined to include lead-based paint which is peeling, chipping or flaking from the substrate shall be removed or stabilized as part of planned renovation operations which will disturb them. The Contractor shall dispose of detached paint chips, lead-containing dust, HEPA vacuumed debris, removed building elements with LBP, and related elements generated as a result of the work as RCRA lead waste. Lead-containing waste shall be segregated from other waste streams and consolidated into properly lined and labeled drums and disposed in accordance with applicable local, state and federal regulations.

The Contractor shall collect detached paint chips and related residue dislodged by the work from building components, or which existed on building finishes prior to start of work. Contractor shall utilize high efficiency particulate air (HEPA) vacuums to clean up all visible paint chips and paint debris.

The Contractor shall conduct all operations which include disturbance of lead in accordance with applicable sections of the project design documents, and applicable local, state, and federal regulations.

The Contractor shall comply with all requirements of Title 8 CCR 1532.1 and CFR 1926.11101 during all work involving disturbance of lead in painted finishes affixed to structures at the subject site. The Contractor shall conduct air monitoring shall be conducted during all work operations involving disturbance of painted surfaces. Containment systems shall be constructed as required by applicable regulations to minimize the spread of lead-containing dust beyond the designated Lead Regulated Area).

The Contractor shall remove all visible paint chips from horizontal surfaces as directed by the Building Owner or its Lead Consultant Representative.

This section shall constitute the definition of the lead related work as it relates to the referenced project.

1.02 DESCRIPTION OF WORK

The Contractor shall complete all work in accordance with project design documents in a manner which will maintain airborne lead levels below the OSHA “Action Level” and “Permissible Exposure Limit” during all work which includes disturbance of lead-containing, lead-based paint, and lead-containing surface coatings on building elements on the subject property which are impacted during the course of the work. The Contractor shall conduct all work in specified areas where disturbance of lead will occur. All lead-related work shall be completed in compliance with these specifications and applicable local, state and federal regulations.

Work involving disturbance of lead paint shall be performed in compliance with 8 CCR 1532.1, 17 CCR, Division 1, Chapter 8, HUD Guidelines, the State of California, Department of Public Health, Title 17, Division 1, Chapter 8, and all other local, state, and federal regulations relating to the disturbance of lead-based or lead-containing paint.

Contractor shall thoroughly review all project design documents, including specification sections, drawings and addendums to accurately determine scope of work which may include disturbance of lead-based or lead-containing paint and surface coatings. In addition, Contractor shall review the lead inspection report previously generated by the Owners’ Lead Representative to determine locations of lead-based and lead-containing paint to be impacted by the proposed work operations. Contractor shall not request additional compensation or additional workdays based upon their failure to accurately determine the scope of work which involves the disturbance of lead-containing paint based upon comprehensive review of the previous lead inspection report, project specifications and drawings, and field verification of quantities, locations, and actual jobsite conditions affecting the scope of work.

XRF inspections for paint include representative testing of painted finishes based on a method typical of a 4-sided structure. As such, not all elements are tested. Accurate interpretation of the results requires evaluation of other matching painted finishes consistent with those readings found to contain lead-based or lead-containing paint. The contractor shall conduct a thorough visual inspection prior to submitting a bid for the work to determine additional locations matching testing combinations included in the inspection report.

The Contractor shall be responsible for determining all conditions effecting proper execution of the work. Field verification shall be conducted where necessary to verify existing conditions prior to submission of bid on the work.

The Contractor shall properly dispose of all non-intact lead-based paint, (defined as paint not solidly adhered to a substrate), lead-containing paint chips and dust, contaminated work articles and PPE, and paint chips and lead-containing dust removed prior the demolition. Contractor shall properly dispose of wastewater generated during the work based on the results of a lead waste characterization conducted by the Contractor.

1. For bid purposes, Contractor shall base bid on disposal of all loose or detached paint as RCRA waste in accordance with the Resource Conservation and Recovery Act (RCRA) of 1976. RCRA was amended in 1980 and most recently on November 8, 1984 by the Hazardous and Solid Waste Amendment. Loose or detached paint shall be based upon condition of building elements, or building materials after removal, not pre-job condition.
2. The scope of work includes abatement of previously identified asbestos-containing materials at interior building locations prior to proceeding with demolition operations involving those structures at the subject site to be impacted by the work
3. Should Contractor discover additional undiscovered suspect asbestos-containing materials, Contractor shall stop work and request clarification from Owner before submitting a bid for the work.

1.03 EXPERIENCE AND WORKMANSHIP

The Contractor performing the work shall be properly licensed in the State of California to conduct the proposed lead work operations. The Contractor shall be required to provide proof of lead-related training appropriate for demolition operations with lead paint. The contractor shall also have all other required contractor licenses required based on the nature of the work.

The Contractor performing this work MUST be familiar with all applicable regulations covering disturbance of lead paint. This includes all permits, licenses, and certificates required to perform this type of hazardous work and related disposal requirements.

A "Lead Compliance Plan" per 8 CCR 1532.1, outlining the methods and controls to be used during the performance of this work will be submitted to the Owner as part of the submittal package and approved prior to the start of any work involving disturbance of painted finishes. A separate "Compliance Plan" shall be prepared by each contractor engaged in work on the project which includes disturbance of lead-containing paint.

It is the Contractor's responsibility to maintain adequate controls and perform personal air monitoring to ensure worker safety for lead-related work for the duration of the project. Lead Abatement Contractor shall provide personal air monitoring results to Owner's Representative within 48 hours of the shift during which they were collected.

1.04 PERSONAL TRAINING AND PROTECTION

Personnel Training

Any worker involved in work related to the project which includes disturbance of lead paint as defined in this Specification must have successfully completed a lead training course as required by 8 CCR, 1532.1 and 17 CCR, Division 1, Chapter 8. The Contractor shall provide documentation of current training. All employees engaged in lead related work shall have CDPH level training and be certified by the State of California, Department of Public Health as a Worker or Supervisor.

All lead workers and supervisors shall be certified by the California Department of Public Health (CDPH), Childhood Lead Poisoning Prevention Program, Accredited Lead Training Provider. Lead training must be provided by a training provider certified by the State of California.

Biological Monitoring (Lead Workers, Supervisors and Renovation Personnel)

Contractor shall conduct biological (blood testing) on its employees engaged in work involving disturbance of lead in accordance with Cal/OSHA requirements (8 CCR 1532.1) and shall submit evidence that monitoring is current for all employees that will enter a regulated lead work area.

A worker will be removed from the job if his blood lead level is 50 ug/dl or greater [29 CFR 1926.62 (k)]. The Contractor shall be responsible for medical surveillance and record keeping in accordance with 8 CCR 1532.1.

Initial Determination

The Contractor shall conduct an initial determination of the worker lead exposures for each specific task required by Cal/OSHA Construction Lead Standard [Title 8 CCR 1532.1}. Exposures shall be conducted for each specific task and shall be during periods and activities likely to generate the highest possible exposure level.

All Contractor employee categories shall be included in the exposure monitoring.

The duration of air monitoring shall be sufficient to provide a statistical confidence (95% upper confidence limit) that no employees are exposed above the lead "AL" or the "PEL".

Until initial determination is completed, Contractor shall conduct work utilizing the highest degree of engineering (barriers, two-stage, or three-stage contamination) administration and respiratory protection controls required by applicable regulations governing lead related work.

A copy of the initial determination shall be provided to the Building Owner's Representative.

Respiratory Protection

The Contractor shall provide all workers, foremen, and superintendents with properly fitted respirators approved by NIOSH and OSHA as determined by the results of the initial determination. Respirators are required at all times when employees are engaged in work on this project which involves the disturbance of lead-containing painted, coated, or glazed surfaces, or other lead-containing materials.

Authorized visitors (i.e., federal, state, and local inspectors) must provide a current health and medical report certifying them as approved to wear half-face respirators prior to entering any containment area.

When respirators and disposable filters are employed, sufficient replacement filters will be provided by the Contractor for the workers and any visitors. Respirators shall be type P100 and be NIOSH approved.

The minimum respiratory protection required for this project shall be based upon initial air monitoring results specific from this project and completion of "trigger tasks" as required by 8 CCR 1532.1.

1. Negative pressure, half-mask, air purifying respirators, equipped with HEPA filters for airborne lead dust levels not in excess of 0.5 mg/m^3 (10 x PEL).
2. Full-face piece air purifying respirator, with HEPA filters for airborne dust levels not in excess of 2.5 mg/m^3 (50 x PEL).
3. Pressure demand, full face piece, supplied air respirators for airborne lead dust concentrations are expected to meet or exceed 50 mg/m^3 (1000 x PEL).

All workers inside the LEAD work area shall wear the proper respirator based on the anticipated lead dust level. Adjustment in respirator type shall be made based on the "trigger tasks" performed by the contractor.

Workers must be properly trained in the care, use, and maintenance of respirators.

The Contractor shall ensure that a respiratory fit-test was performed and passed by each lead worker within the last eleven (11) months. Evidence of current fit tests specific to each respirator brand, type, model and size shall be submitted. Includes fit-testing of proposed respirators types for each employee.

A formal respiratory protection program must be implemented in accordance with 29 CFR 1910.134.

Respirators will not be removed until the worker enters the shower area of the decontamination chamber.

Personal Protection Equipment

Workers will wear full body disposal suits with hoods and booties. A *TYVEK* or similar type of suit will be worn. Suits will be worn inside the work area after the area passes pre-lead inspection and shall remain in use during each day that work is performed that involves disturbance of lead. Light-weight nylon clothes may be worn under the suit, but these clothes must be changed before leaving the work area and should be laundered separately.

Goggles with side shields will be worn when working with a material that may splash or fragment, or if protective eye wear is specified on the MSDS for that product.

Additional respiratory protection by supplemental filters, such as organic vapor cartridges, may be needed when handling some coating products. Consult the MSDS for each product use during performance of the work and obtain the proper filters as appropriate based upon the potential routes of exposure.

Personal Hygiene Practices

The Contractor shall enforce and follow good personal hygiene practices during lead abatement. These practices will include, but not be limited to, the following:

1. No eating, drinking, smoking, chewing gum or tobacco, or applying cosmetics in work area. The Contractor will provide a clean space, separated from the work area, for these activities.
2. All workers must wash upon leaving the work area. Wash facilities will be provided by the Contractor consisting of, at least, running water, towels, and a HEPA vacuum. Upon leaving the work area, each worker will remove and dispose of work suit, wash and dry face and hands, and vacuum clothes. An appropriate emergency eyewash station shall be available for use.
3. Disposable clothing such as *TYVEK* suits and other personal protective equipment (PPE) must be donned prior to entering any lead work area. A clean room will be provided for workers to put on suits and other personal protective equipment and to store their street clothes. Disposable suits shall be used once and then properly discarded.
4. A hand-washing facility must be provided and located in close proximity of the eating and drinking area. The washing station will be maintained in clean condition and drained daily, or whenever required to maintain in clean condition to the satisfaction of the Building Owner.

If air monitoring data gathered by the Contractor shows that employee exposure to airborne lead exceeds $50\mu\text{g}/\text{m}^3$, the following conditions apply:

1. Street clothes cannot be worn into containment. Workers must wear nylon shorts, bathing suits or *TYVEK* shorts under the disposable suit.

2. Showers must be provided. Shower water must pass through at least a 5.0 micron filter before returning to the public waste system. Disposal of wastewater shall meet the requirements of the local regional water quality district.

1.05 DEFINITIONS AND ABBREVIATIONS

The following definitions apply to the work of this specification:

AA - Atomic absorption.

AC - Alternating current.

ACCREDITED LABORATORY - A laboratory which is accredited by the American Industrial Hygiene Association, participates in the Proficiency Analytical Program (PAT), and is accredited by the State of California's Environmental Laboratory Accreditation program.

ACCURACY - The degree to which a measurement determines a known amount of lead or other component in a particular reference material.

ACTION LEVEL (AL) - The point at which something is required due to the presence of lead. For example, the OSHA action level for airborne lead is 30 ug/m³.

AIR MONITORING (air sampling) - The process of measuring the lead content of a specific volume of air using the National Institute for Occupational Safety and Health (NIOSH) method or other method approved by the Building Owner. Flow rate and sampling volume shall be in accordance with the method chosen. Also see Area Monitoring and Exposure Monitoring.

AIRLOCK - A system for permitting ingress or egress without permitting air movement between a contaminated area and an uncontaminated area, typically consisting of two curtained doorways at least 6 feet apart.

AMENDED WATER - A water to which a surfactant, such as trisodium phosphate, has been added.

ANSI - American National Standards Institute.

AREA MONITORING - Air monitoring of lead concentrations within the lead abatement area and outside the lead area, which is a representative of the ambient airborne concentration of lead. Also see Exposure Monitoring.

ASHREA - American Society of Heating, Refrigerating and Air-Conditioning Engineers.

ASME - American Society of Mechanical Engineers

ASSOCIATED SURFACE - Interior/exterior walls, hangers, duct work, duct work insulation, conduit, electrical cables, light fixtures, junction boxes, panel boxes, building insulation materials and other items joined with or adjacent to structural members.

ASTM - American Society of Testing and Materials.

AUTHORIZED VISITOR - Any visitor to the site whose visit has been authorized by the Owner.

BARRIER - A physical structure such as a wooden or tape (yellow ribbon with lead hazard warning signs) barricade, which defines the limits of the containment area wherein LBP abatement is occurring. This is the basic, first level, Engineering control; the second level control is a two-stage containment (dirty room and clean/change room) with negative air; the third level control is a three-stage containment (dirty room, shower and clean/change room) with negative air. The level of engineering control is predicated on the type of LBP abatement methods employed and/or the results of initial and ongoing lead air monitoring results.

BIENNIAL REPORT - A report (EPA Form 8700-13A) submitted to generators of hazardous waste to the Regional Administrator due March 1 of each even-numbered year. The report includes information on the generator=s activities during the previous calendar year. The owner or operator of a treatment, storage and disposal facility must also prepare and submit a biennial report using EPA Form 8700-1313.

BIOLOGICAL MONITORING - The analysis of a person=s blood and/or urine to determine the level of lead contamination in the body. The OSHA Lead standard requires biological monitoring as part of the medical surveillance requirements.

BLANK - A non-exposed sample of the medium used for testing, such as a wipe or filter, which is analyzed like other samples to determine whether samples are contaminated with lead before samples are collected (e.g., at the factory or at the testing site), or whether the samples are contaminated after sample collection (e.g., during transportation to the laboratory or in the laboratory).

BUILDING OWNER'S REPRESENTATIVE - The individual or firm retained by the Building Owner to oversee lead related work and to provide testing services on its behalf.

CFR - The Code of Federal Regulations is the basic component of the Federal Register publication system. The CFR is a codification of the requirements of the various federal agencies.

CHARACTERISTICS - EPA has identified four characteristics of hazardous waste: ignitability; corrosivity; reactivity; and toxic characteristic leaching procedure (TCLP) toxicity (formerly extraction procedure (EP) toxicity). Any solid waste that exhibits one

or more of these characteristics is classified as a hazardous waste under the Resource Conservation and Recovery Act (RCRA). See EP Toxicity and TCLP.

CLEAN ROOM - An uncontaminated area or room which is part of the workers decontamination facility, with provisions for storage of workers' street clothes and clean or unused protective equipment.

CONTAINER - Any portable device in which material is stored, transported, treated, disposed of, or otherwise handled.

CONTAINMENT - An isolation method for protecting both workers and the environment by controlling exposures to lead dust and debris created during lead control. Two levels of containment are identified beyond the barrier stage: a TWO-STAGE containment (dirty room and clean/change room) with negative air and a THREE-STAGE containment (dirty room, shower and clean/change room) with negative air.

CONTAINMENT AREA - A work area or zone for lead abatement work that is defined by tape, signage and/or physical barriers.

CONTRACTOR - Any business entity, public unit, or person performing the role of LBP abatement contractor for the project.

DF - Decontamination Facility.

DI - Draft included.

DISPOSAL - The discharge, deposit, injection, dumping, spilling, leaking, or placing of any solid waste or hazardous waste into or on any land or water so that any constituent therefore may enter the environment or be emitted into the air or discharged in any waters, including ground waters.

DISPOSAL FACILITY - A facility or part of a facility at which hazardous waste is intentionally placed into or on any land or water, and at which waste will remain after closure.

DOT - Department of Transportation.

ENCAPSULANT (sealant) - A liquid material which can be applied to lead containing areas and which controls the possible release of lead from the material either by creating a membrane over the surface (bridging encapsulant) or by penetrating into the material and binding its components together (penetrating encapsulant).

ENCAPSULATION - Involves resurfacing or covering a surface, and sealing or caulking with durable materials, so as to prevent or control chalking and flaking of lead-containing substances.

ENCLOSURE - See Containment Area and Barrier.

ENGINEERING CONTROLS - Measures implemented at the work site to physically/mechanically contain, control, and/or otherwise reduce exposure to lead dust and debris. Does not include administrative and/or respiratory protection controls.

EP - Extraction procedure.

EPA - Environmental Protection Agency.

EPA IDENTIFICATION - The unique number assigned by EPA to each generator or transporter or hazardous waste, and each treatment, storage, or disposal facility.

EP TOXICITY - A test, called the extraction procedure, that is designed to identify wastes likely to leach hazardous concentrations of particular toxic constituents into the ground water as a result of improper management. EP toxicity is a characteristic of hazardous waste. It has been replaced by TCLP as the acceptable method. See TCLP and Characteristics.

EQUIPMENT ROOM - A contaminated area or room that is part of the workers decontamination facility, with provisions for storage of contaminated clothing and equipment.

EU - Exhaust Unit

EXPOSURE MONITORING - Worker air monitoring to establish initial or to document ongoing lead exposure levels. Must be done to enable each employee's exposure level to be reasonably represented by at least one full-shift (at least 7 hours) air sample.

FACILITY - All continuous land, structures, other appurtenances, and improvements on the land, used for treating, storing, or disposing of hazardous waste. A facility may consist of several treatment, storage, or disposal operational units, e.g., one or more landfills, surface impoundments, or combination of them.

FEDERAL REGISTER - A document published daily by the federal government that contains either proposed or final regulations.

FINAL INSPECTION - Inspection by a certified inspector/assessor industrial hygienist, or local public health official to determine if lead abatement work and clean up are complete.

ft² - Square feet

CF - Cubic feet

CFM - Cubic feet per minute

GENERATOR - Any person who first creates a hazardous waste or any person who first makes the waste subject to the Subtitle C regulation (i.e., imports a hazardous waste; initiates a shipment of a hazardous waste from a hazardous waste treatment, storage or disposal facility (TSD); or mixes hazardous wastes of different Department of Transportation (DOT) shipping descriptions by placing them into a single container.)

GFCI - Ground fault circuit interrupter

GROUND WATER - Water below the land surface in a zone of saturation.

H2O - Water

HAZARDOUS WASTE - As defined in RCRA, a solid waste or combination of solid wastes which, because of its quantity, concentration or physical, chemical or infectious characteristics, may:

1. Cause, or significantly contribute to an increase in mortality or an increase in serious irreversible or incapacitating reversible, illness, or
2. Pose a substantial present or potential hazard to human health or the environment when improperly treated, stored, transported or disposed of, or otherwise managed. As defined in the regulations, solid waste is hazardous if it meets one of four conditions:
 - a. Exhibits a characteristic of a hazardous waste (40 CFR Section 261.20 through 262.24).
 - b. Has been listed as hazardous (40 CFR Section 261.31 through 261.33).
 - c. Is a mixture containing a listed hazardous waste and a non hazardous solid waste (unless the mixture is specifically excluded or no longer exhibits any of the characteristics of hazardous waste).
 - d. Is not excluded from regulation as a hazardous waste.

HEPA - High efficiency particulate air.

HEPA VACUUM - A specially-designed vacuum cleaner fitter with a HEPA filter.

HIGH EFFICIENCY AIR (HEPA) FILTER - A filter capable of filtering out particles of 0.3 microns or greater from a body of air at 99.97% efficient against mono-dispersed particles that are 0.3 microns in diameter or larger.

HIGH PHOSPHATE DETERGENT - Detergent which contains at least 5% trisodium phosphate (TSP) or other approved additive.

HUD - United States Department of Housing and Urban Development.

HUD LBP Guidelines - Guidelines for the Evaluation and Control of Lead-Based Paint Hazards in Housing, June 1995, pursuant to Title X of the Housing and Community Development Act of 1992, Department of Housing and Urban Development.

ICP, AES - Inductively coupled plasma, atomic emission spectroscopy.

INDUSTRIAL HYGIENIST - A person certified by the American Board of Hygiene or an industrial hygienist in training, or an individual with equivalent education or experience.

INITIAL DETERMINATION - Includes instrument monitoring of the air for the presence of lead and covers the exposure of a representative number of employees who are reasonably believed to have the greatest exposure. Provides the basis for the determination of the level of engineering controls, degree of respiratory protection and other required actions.

kg - Kilogram(s)

LANDFILL - A disposal facility where hazardous waste is placed in or on land and which is not a land treatment facility, a surface impoundment, or an injection well.

LEAD ABATEMENT - A comprehensive (removal, encapsulation, enclosure, etc.) of eliminating exposure or potential exposure to lead dust which must include monitoring, measures for worker protection, containment of dust and debris, cleanup and disposal of waste and clearance testing.

LEAD PERMISSIBLE EXPOSURE LIMIT (PEL) - The limit is 50 micrograms per cubic meter of air as an 8-hour, time weighted average.

LOCAL EXHAUST SYSTEM - A system in which static pressure in an enclosed abatement area is lower than that of the environment outside the abatement area, as specified herein.

MANIFEST - The shipping document, EPA form 8700-22, used for identifying the quantity, composition, origin, routing and destination of hazardous waste during its transportation from the point of generation to the point of treatment, storage or disposal.

MEAN - The arithmetic average of data values. The algebraic sum of the data values divided by the number of data values. When using an XRF instrument, the mean is the average of a series of numerical readings reported by the instrument.

MEDICAL REMOVAL - The temporary removal of workers due to elevated blood lead levels as defined by the OSHA Lead standard.

mg/cm² - Milligrams per square centimeter

MICROGRAMS - The prefix "micro" means "1/1,000,000 of (one millionth of). A microgram is 1/1,000,000 of a gram and 1/1000 of a milligram. A microgram is equal to about 35/1,000,000,000 (thirty-five billionths) of an ounce. 28,400,000 ug are equal to 1 ounce.

mil - Millimeter

MSDS - Material Safety Data Sheet - OSHA Form 20 or equivalent forms containing health hazard information about chemical products.

NAM - Negative air machine

NEGATIVE AIR MACHINE (NAM, HOG) - A self-contained local exhaust machine utilized in a negative air pressure system.

NEGATIVE AIR PRESSURE SYSTEM - A local exhaust system capable of maintaining a minimum pressure differential of minimum 0.02 inch of water gauge in a work area relative to adjacent areas.

NEMA - National Electrical Manufacturers Association.

NIOSH - National Institute of Occupational Safety and Health.

OSHA - Occupational Safety and Health Administration

OWNER - The Owner of the facility or site. As used in this Specification, the Owner is the Bakersfield City School District.

PAPR - Powered air purifying respirator

PEL - Permissible exposure limit

PERMIT - An authorization license or equivalent control document issued by EPA or an authorized State to implement the regulatory requirements of Subtitle C Parts 264 and 265 for TSDs.

PRECISION - The degree of repeatability of a series of successive measurements.

psi - Pounds per square inch

RCRA - Resource Conservation and Recovery Act of 1976. An amendment to the Solid Waste Disposal Act of 1965. RCRA was amended in 1980 and most recently on November 8, 1984 by the Hazardous and Solid Waste Amendment.

REGULATION or RULE - All or part of any Federal statement of general or particular applicability and future effect designed to implement, interpret, or prescribe law or policy; or describe the Federal Department=s organization or its procedure or practice requirements.

REMOVAL - All herein-specified procedures necessary to mechanically or chemically strip all LBP from the designated areas and to dispose of these materials at an acceptable site.

REPLACEMENT - A lead abatement strategy entails removing components such as windows, doors, and trim that have lead-painted surfaces and installing new components free of lead paint.

SCRAPING - Removing loose, peeling or chipped LBP from the substrate; collection of debris and disposal as a hazardous waste. Usually performed with hand tools such as a broad blade putty knife; does not include sanding (manual or powered).

SHOWER ROOM - A room between the clean room and the equipment or dirty room in the worker decontamination facility, with hot and cold running water, soap, shampoo, suitably arranged for complete showering during decontamination.

SITE - The land or water area where any facility or activity is physically located or conducted, including adjacent land used in connection with the facility or activity.

SOLID WASTE - As defined in RCRA, any garbage, refuse, sludge from a waste treatment plant, water supply treatment plant or air pollution control facility and other discarded material, including solid, liquid, semisolid or contained gaseous material resulting from industrial, commercial, mining and agricultural operations and from community activities, but does not include solid or dissolved material in domestic sewage, or solid or dissolved materials in irrigation return flows or industrial discharges which are point sources subject to permits under the Clean Water Act, or special nuclear or byproduct material as defined by the Atomic Energy Act of 1954.

SPECTRUM ANALYZER (XRF) - A type of XRF analyzer which provides the operator with a plot of the energy and intensity of both AK and AL shells, as well as a calculated lead concentration, expressed in mg/cm².

STANDARD - Used in two ways: levels established by law or regulation, such as the Cal/OSHA "PEL" of 50 µg/m³; materials to which known quantities of lead have been applied. Used to evaluate the accuracy and performance of the XRF analyzer, usually called Standard Reference Materials.

STEL - Short term exposure limit

STORAGE - The holding of hazardous waste for a temporary period, at the end of which the hazardous waste is treated, disposed of or stored elsewhere.

STRUCTURAL MEMBERS - Beams, cross bracing, main frame members, floor/roof slab with steel frame and joist, steel roof decking, steel hangers, steel tubes, welded steel boxes and other steel shapes.

SUBSTRATE - A surface upon which paint or varnish has been or may be applied. Examples of substrates include wood, plaster, metal and drywall.

SURFACTANT (Wetting Agent) - A chemical wetting agent added to water to improve penetration.

TCLP - Toxic Characteristic Leaching Procedure (see EP Toxicity Test and Characteristics).

TIME-WEIGHTED AVERAGE (TWA) - The TWA is an 8-hour, time-weighted average of airborne concentration for lead per cubic meter of air which represents the employees 8-hour workday.

TLV-STEL - Threshold limit value - short term exposure limit

TLV-TWA - Threshold limit value - time weighted average

TRANSPORTER - Any person engaged in the off-site transportation of hazardous waste within the United States, by air, rail, highway or water, if such transportation requires a manifest under 40 CFR Part 262

TREATMENT - Any method, technique or method, including neutralization, designed to change the physical, chemical or biological character or composition of any hazardous waste so as to neutralize it or render it non-hazardous or less hazardous, or to recover it, make it safer to transport, store or dispose of, or amenable for recovery, storage or volume reduction

TSD - Hazardous waste treatment, storage or disposal facility.

TSP - Trisodium phosphate

TWA - Time weighted average

µg: Micrograms - The prefix "micro" means "1/1,000,000 of (one millionth of). A microgram is 1/1,000,000 of a gram and 1/1000 of a milligram. A microgram is equal to about 35/1,000,000,000 (thirty-five billionths) of an ounce. 28,400,000 µg are equal to 1 ounce.

µg/m³ - Micrograms per cubic meter

µg/ft² - Micrograms per square foot

µg/g - Microgram/gram

UL - Underwriters Laboratories

µm - Micrometer

U.S. - United States

WET CLEANING - Eliminating lead contamination from building surfaces and objects by using cloths, mops or other cleaning tools which have been dampened by water amended with TSP, and afterwards disposing of these cleaning tools as lead-contaminated waste.

WORK AREA - A room or location in which lead is indicated to be removed under the contract.

WORK PRACTICE CONTROL - See Engineering Controls

1.06 STANDARDS AND GUIDELINES

The current issue of each document shall govern. Where conflicts among requirements or within these specifications exist, the more stringent requirements shall apply.

General Applicability of Codes, Regulations and Standards: Except to the extent that more explicit or more stringent requirements are written directly into the specification, all applicable codes, regulations, and standards have the same force and effect (and are made part of the specification by reference) as if copied directly into the specification, or as if published copies are bound herewith.

Contractor Responsibility: The Contractor shall assume full responsibility and liability for compliance with all applicable federal, state and local regulations pertaining to work practices, hauling, disposal and protection of workers, visitors to the site, and persons occupying areas adjacent to the site. The Contractor is responsible for providing medical examinations and maintaining medical records of all personnel as required by the applicable federal, state and local requirements. In addition, the Contractor will be responsible for obtaining all local permits and paying all fees prior to beginning work. Copies of permits must be submitted to Owner's Representative prior to the start of work and must be posted at the project.

HUD LBP Guidelines: The Contractor shall comply with all provisions and/or responsibilities, as applicable, contained in the Guidelines for the Evaluation and Control of Lead-Based Paint Hazards in Housing, pursuant to Title X of the Housing and Community Development Act of 1992, Department of Housing and Urban Development.

Occupational Safety and Health Act

1. The Contractor shall comply with the requirements of the General Industry Safety and Health Standards, 29 CFR Part 1910, the Safety and Health Regulations for Construction, 29 CFR Part 1926, the California Lead in Construction Standard - Title 8 CCR 1532, including all other standards and regulations which administer such Acts, and said requirements, standards and regulations as incorporated herein by reference.
2. The Contractor shall strictly adhere to the provisions of the following 29 CFR Sections:
 - a. 1910.1025: Lead Standard

- b. 1910.134: Respiratory Protection
- c. 1910.302-307, 1926.400: Electrical
- d. 1910.28, .29, .67, .22, .23, .66, 1926.451: Scaffolding
- e. 1910.22, .100h, 1926.25: Housekeeping
- f. 1910.1200: Hazard Communication (Employee Right-to-Know)
- g. 1910.25, .26, 1926.450: Ladders
- h. 1910.37, .38: Egress and Emergency Plans
- i. 1919.95, .132-.137, .1001, 1926.28, .100-.014: Personal Protective Equipment
- j. 1910.141, 1926.27, .51, .950h: Sanitation
- k. 1910.242-.244, 1926.302: Powered Hand Tools
- l. 1926.16: Contractors Responsibilities
- m. 1926.20: General Safety and Health Provisions
- n. 1926.21: Safety Training and Education
- o. 1925.25: Housekeeping
- p. 1926.28: Personal Protective Equipment
- q. 1926.51(f): Washing Facilities
- r. 1926.55: Gases, Vapors, Fumes, Dusts and Mists
- s. 1926.57: Ventilation
- t. 1926.59: Hazardous Communication Standard
- u. 1926.62: Lead
- v. 1926.103: Respiratory Protection
- w. 1926.353(c): Ventilation: Welding, Cutting or Heating of Metals of Toxic Significance

Copies of these standards are available from OSHA.

3. Compliance with the requirements of referenced state and federal standards will be strictly enforced by Building Owner's Representative.

State and Local Requirements

1. The Contractor shall comply with the following State of California Department of Occupational Safety and Health Regulations: Title 8 California Code of Regulations: Construction Industry Safety Orders, Lead Regulations.
2. The Contractor shall comply with the following State of California, Department of Public Health Regulations: Title 17 California Code of Regulations, Division 1, Chapter 8: Accreditation of Training Providers and Interim Certification of Individuals Engaged in Lead-Related Construction Work.
3. The Contractor shall comply with the Notification requirements of the State of California, Department of Public Health and shall file a completed notification a minimum of five (5) days prior to commencing lead related activities classified as "abatement" as defined under Title 17, Division 1, Chapter 8.
4. The Contractor shall comply with the Notification requirements of Cal/OSHA under 8 CCR 1532.1.

5. The Contractor shall comply with the Federal Environmental Protection Regulations pertaining to handling and disposal of lead-containing materials as well as the State of California and any local governmental agencies which have delegated responsibility for the administration and enforcement of federal regulations.
6. The Contractor shall comply with the California Air Resources Board, Executive Order G-565 and associated Advisory Abrasive Certification List.
7. The Contractor shall comply with all requirements of the EPA-approved landfill which is selected as the disposal site.
8. Contractor shall comply with all requirements of the Regional Water Quality Board for disposal of wastewater which contains lead, in addition to all local, state, and federal water quality standards.

Other Requirements

1. American National Standards Institute (ANSI) - ANSI Z9.2. Fundamentals Governing the Design and Operation of Local Exhaust Systems.
2. The Contractor shall comply with said regulations, requirements, and standards (noted above) and require and be directly responsible for compliance therewith on the part of his agents, employees, suppliers and Subcontractors; and shall directly receive and be responsible for all citations, assessments, fines or penalties which may be insured by reason of his agents, employees, suppliers or Subcontractors failing to so comply.
3. The Contractor shall indemnify T. Brooks & Associates, a division of Provost & Pritchard Consulting Group from any and all losses, costs and expenses, including fines, judgments, and reasonable attorney's fees incurred either indemnified party by reason of negligence on the part of the Contractor in exposing his employees, owner personnel, visitors, and/or in the proper or accepted procedures dealing with lead abatement and/or the real or alleged violation of such laws, ordinances, regulations, and directives (federal, state and local) which are currently in effect or which become effective in the future, by the Contractor, his Subcontractors, or suppliers.

1.07 SUBMITTALS AND NOTICES

WITHIN TEN (10) CALENDAR DAYS AFTER THE NOTICE OF INTENT TO AWARD, PROVIDE THE FOLLOWING SUBMITTALS TO THE OWNER

Submit proof satisfactory that all required permits, site locations and arrangements for transport and disposal of lead-based materials wastes and the like have been obtained including, but not limited to, the following:

1. The EPA hazardous waste generator identification number (GIN)

2. The name and appropriate certification/licenses of the hazardous materials transport firm(s).
3. The name and appropriate certification/licenses of the landfill and/or incinerator facility.

Submit to Owner for information and approval, a description of the plans for phasing and construction of the decontamination system(s), waste load-out area(s), and containment area(s) used to isolate the functional space(s) in compliance with this specification and applicable regulations. These requirements shall be met by submission of shop drawings on which each of these areas are clearly identified. The "submittal" shall include the name and credentials of the laboratory that the Contractor proposes to use for testing.

Submit to Owner for approval, a "Lead Compliance Plan" for the project in accordance with 8 CCR 1532.1. The plan shall clearly identify the work method(s), containment plan(s) by floor or section, timelines and responsible parties.

Submit a written respiratory protection plan as required in 29 CFR 1910.1025(e)(3).

Submit a written medical examination and consultation plan that includes the items required by 29 CFR 1920.1025(j)(3).

Submit certifications documenting that employee information and training for lead exposure has been completed for Contractor and other affected subcontractors.

The Contractor shall also submit the following:

1. Weekly work schedule.
2. Method of application and materials to be used.
3. Test for personal air monitoring and, as appropriate (two and three-stage containments), air pressure differential between work areas and external air
4. Submit various manufacturer's information (including MSDS) and type and brands of materials for workers protection
5. Drawings showing the location, phasing and construction of the decontamination system(s), waste load-out area(s), and containment area(s) used to isolate the functional space(s) in compliance with this specification and applicable regulations.
6. Schedule for changing filters in negative air pressure system (only required if area and exposure monitoring indicated the need for two or three-stage containment system) and water filtration system.
7. Copies of all daily manpower and work logs indicating area(s) and type of work performed.
8. Copies of all certifications of disposal.

9. Copies of permits.
10. Copies of all OSHA Form 101 or equivalent CAL/OSHA accident/injury/incident reports.
11. All "submittals" and notices required by this section shall be provided to Owner for review and approval prior to commencing work operations.
12. Contractor shall provide a lead submittal in paper or electronic format based on the project requirements for review by the Owner's Lead Representative. Any omissions, or incomplete information as noted by the reviewer shall be corrected or supplemented to provide an accurate, complete submittal.

1.08 AIR MONITORING REQUIREMENTS

Initial Determination

The Contractor shall conduct an initial determination of employee lead exposures per task as required by the State of California, OSHA Construction Lead Standard [8 CCR 1532.1].

All Contractor and subcontractor employee categories shall be included in the exposure monitoring.

The duration of air monitoring shall be sufficient to provide a statistical confidence (95% upper confidence limit) that no employees are exposed above the lead "AL" or "PEL".

The results of the initial determination shall be used to establish the degree of engineering (barriers, two-stage, or three-stage containment), administrative and respiratory protection controls and the frequency of periodic exposure monitoring.

A copy of the initial determination shall be provided to the Owner's Lead Representative.

Daily Employee Exposure Monitoring

Regardless of the results of the initial determination, the Contractor shall conduct daily employee exposure monitoring of not less than ten percent (10%) of the Contractor's employees, or a minimum of two workers, representing the various tasks being performed. Monitoring shall include those employees which are likely to have the highest exposure and shall be representative of the remaining workers.

Daily monitoring of the Contractor's employees shall be performed which will represent each employee's exposure and shall not be of less than seven hours duration, unless shift is reduced, in which case monitoring shall represent entire shift.

Monitoring on behalf of Owner:

Owner's Representative may, at its discretion, conduct initial and periodic area monitoring at the outside perimeter of the work area during the project. Cost of such sampling would be paid by Owner.

Contractor shall conduct representative personal air sampling for each shift. Failure of Contractor to perform personal air sampling operations to satisfaction of Owner's Representative, or failure to provide laboratory results within 48 hours of sampling will allow Owner's Representative to conduct independent personal air monitoring operations and to charge Contractor for cost of such operations including, but not limited to costs of shipping, on-site air sampling, and laboratory analysis.

The work area shall be considered to have four (4) sides for the purpose of this section. A minimum of two (2) air samples shall be collected: one (1) inside the work area and one (1) outside.

Owner's Representative may collect baseline and pre-renovation soil samples, in order to determine pre and post renovation lead levels at each subject structure.

1.09 WORK STOPPAGE

If, at any time, Owner determines that work practices are violating pertinent provisions of this Contract, endangering workers, other contractors, or others, it will immediately notify the Contractor that operations shall cease until corrective action is taken and the Contractor shall take such corrective action before proceeding with the work.

Delays caused by inappropriate work practices as noted in these specifications and/or excessive concentrations shall be at the Contractor's expense. Threshold Limit Value - Short Term Exposure Limit (TLV-STEL) shall be according to the 1990-1992 Threshold Limit Values for Chemical Substances and Physical Agents and Biological Exposure Indices (American Conference of Governmental Industrial Hygienists).

1. If these levels are exceeded, operations shall cease until Owner's Representative determines that acceptable standards are met.
2. No later claims for extra compensation which result from action taken under this cause will be recognized by Owner.

In case of disagreement between Owner and the Contractor regarding the analysis of any air monitoring data (initial, periodic, area, or employee exposure), the decision of Owner will be regarded as final and conclusive. Differences in analytical results of up to a maximum of 30% shall be regarded as being substantially in agreement.

1.10 SITE SECURITY

The work site and surrounding areas may be subject to some degree of unauthorized entries, vandalism and theft. Contractor shall plan to provide tight security for all work areas, storage areas and adjacent building areas which may be accessed through the work areas. All storage areas containing hazardous materials including lead-based paint waste shall be fully enclosed

and locked at all times when personnel are not present to oversee the material. All storage areas containing hazardous materials shall be clearly labeled as containing hazardous materials with signs in both English and Spanish.

Work involving disturbance of lead-containing paint or lead-based paint is to be restricted only to authorized, trained and protected personnel. These may include the Contractor's employees and representatives, state and local inspectors and any other designated individuals. A list of authorized personnel shall be established prior to job start and posted in the clean room of the worker decontamination facility and in the Contractor's work trailer or temporary office.

Contractor shall be notified by Owner of any other authorized visitor prior to his/her entry to the job site.

1. Entry into the work area by unauthorized individuals shall be reported immediately to Owner by the Contractor.
2. A logbook shall be maintained in the clean room (area) of the worker decontamination system or Contractor's office. Anyone who enters any LEAD work area must record name, affiliation, time in and time out for each entry.

Access into the work area shall be through a worker decontamination system(s) located at the work site.

Contractor shall have control of site security during operations, in order to protect work efforts and equipment.

During the course of the entire project, the lead qualified Contractor shall have a full-time foreman on-site during any period that lead-related work is occurring. Foreman shall function as the Contractor's "Competent Person" and shall be a State of California, Department of Public Health Accredited Supervisor.

1.11 EMERGENCY PLANNING

Emergency planning and procedures shall be developed by the Contractor and approved by Owner's Representative prior to the commencement of work involving painted elements.

Emergency procedures shall be in written form and prominently posted. All employees must read and sign these procedures to acknowledge receipt and understanding of work site layout, location of emergency exits and emergency procedures.

Emergency planning shall include written notification of police, fire and emergency medical personnel of planned lead abatement activities, work schedule and layout of work area, particularly barriers that may affect response capabilities.

Emergency planning shall include consideration of fires, explosions, toxic atmospheres, electrical hazards, loss of electrical power, slips, trips and falls, confined spaces and heat related injuries. Written procedures shall be developed and employee training in procedures shall be provided.

Employees shall be trained in evacuation procedures in the event of workplace emergencies.

1. For non-life-threatening situations, employees injured or otherwise incapacitated shall decontaminate following normal procedures before exiting the workplace to obtain proper medical treatment.
2. For life-threatening injury or illness, worker decontamination shall take least priority. After taking measures to stabilize the injured worker, he/she shall be removed from the workplace and proper medical treatment secured.
3. In the event that evacuation procedures are required, the Contractor shall notify ambulance, paramedic personnel, the medical facility and any other required persons that the injured individual(s) is or may be contaminated with lead.

Emergency telephone numbers of all emergency response personnel shall be prominently posted in the clean room/change area and Contractor's office or trailer, and copies provided to OWNER and its Representative.

1.12 PRE-CONSTRUCTION MEETING

The Contractor shall attend a pre-construction job meeting at a time scheduled by Owner. Attending this meeting will be representatives of Contractor, Subcontractors impacted by abatement operations, and Owner's Representative.

At this meeting, the Contractor and supervisory personnel who will provide on-site direction of the lead related activities must attend and be prepared to discuss:

1. Preparation of work area
2. Personal protective equipment including respiratory protection and protective clothing.
3. Employees who will participate in the project, including delineation of experience, training and assigned responsibilities during the project.
4. Decontamination procedures for personnel, work area and equipment.
5. Lead abatement methods and procedures to be utilized.
6. Required air monitoring procedures.
7. Procedures for handling and disposing of waste materials.
8. Procedures for final decontamination and clean-up.
9. Detailed work and performance schedule.
10. Procedures for dealing with heat stress.
11. Emergency procedures.

PART 2 PRODUCTS

2.01 GENERAL REQUIREMENTS

All materials, tools, and equipment listed herein required shall be provided by the subcontractor.

2.02 MATERIALS AND SUPPLIES

Deliver all materials in the original packages, containers, or bundles bearing the name of the manufacturer, the brand name, and labeling as required by 29 CFR 1910.1200, Hazard Communication Standard.

Store all materials that are subject to damage off the ground, away from wet or damp surfaces and under cover sufficient to prevent damage or contamination.

Damaged or deteriorating materials shall not be used and shall be removed from the premises. Material that becomes contaminated with lead shall be disposed of in accordance with all applicable regulations.

Polyethylene Sheeting - Shall be fire resistant, 6 mil thickness, unless otherwise specified, in sizes to minimize the frequency of joints.

Tape - Capable of sealing joints of adjacent sheets of plastic sheets and for attachment of plastic sheet to finished or unfinished surfaces of dissimilar materials and capable of adhering under dry and wet conditions, including use of amended water.

Surfactant (wetting agent) - Detergent containing high phosphate levels (5%-10% solution).

Warning Labels and Signs - As required by OSHA Regulations, 29 CFR 1910.1025 and 8 CCR 1532.1. All warning signs provided for this project must be in both English and Spanish.

Encapsulant – Eco-bond or similar product.

Other Materials - Provide all other materials as specified in drawings; also, other materials, such as lumber, nails and hardware, which may be required to construct and dismantle the decontamination area and the barriers that isolate the work area.

2.03 TOOLS AND EQUIPMENT

Provide suitable tools for lead paint removal.

Type “Supplied Air System” - If a continuous flow or pressure-demand, supplied air respirator, NIOSH/OSHA certified is required to be available for workers. The system shall meet all criteria prescribed by OSHA for supplied air respirators:

1. The system shall have visual and audible alarms to warn of carbon monoxide levels in excess of 20 ppm.
2. It also must be fully certified for hose length combinations up to 300 feet.
3. Either half-mask or full-face piece units fitted with HEPA filter back-up units are acceptable.

Powered Air Purifying Respirator (PAPR) - A positive pressure device which employs a portable, rechargeable battery pack and blower to force contaminated air through a filter or cartridge, where the air is cleaned and supplied to the wearer's breathing zone. This respirator shall utilize HEPA filters and be either half-mask or full-face piece units.

Half-face air purifying respirator with canisters containing HEPA filters.

Full-face air purifying respirator with canisters containing HEPA filters.

Temporary electrical cords and outlets shall be of an approved type and connected to a source of power outside of the work area and protected by a ground fault circuit interrupter (GFCI).

All power shall be G.F.I equipped. Contractor shall provide all equipment necessary to provide power into work area and to conduct work in a safe manner.

PART 3 EXECUTION

3.01 WORK SCHEDULE

The work is to be carried out diligently to completion with utmost speed at each location where work is conducted. The Contractor shall complete all lead-related work in accordance with project schedule established for the project. In order to expedite the work, asbestos and lead related work may be conducted simultaneously within the same containment area. Air monitoring shall be amended to test for both asbestos and lead in accordance with Cal/OSHA.

All work performed under the contract shall be performed during hours stipulated by Owner. Contractor shall fully cooperate with other Contractor's to expedite completion of the project.

If, in the opinion of Owner it becomes necessary to work additional men for maintaining the schedule for the completion of any phase of the project within the specified time, the Contractor must immediately do so upon written request by Owner.

Site work shall proceed in accordance with project schedule following approval of the Contractor's LEAD "Compliance Plan" by Owner's Representative.

3.02 BUILDING RENOVATION OPERATIONS

During all renovation operations with intact lead-based or lead-containing paint, Contractor shall apply water continuously to structure to minimize airborne dust emissions. Building elements shall be maintained in wetted condition while being impacted.

Contractor shall conduct all renovation/demolition work in accordance with applicable Cal/OSHA regulations. The Contractor shall establish a regulated area and require that persons not properly trained and wearing proper PPE remain outside the regulated area at all times.

Contractor shall conduct representative personal monitoring for airborne lead during each and every work shift during which disturbance of lead occurs.

Contractor shall remove building debris from premises daily unless other arrangements are made with authorized representative of Owner.

3.03 INSPECTIONS BY OWNER'S REPRESENTATIVE

The Owner's Representative shall inspect the site preparation work within the work site as outlined herein to ensure that work is conducted in accordance with these specifications and applicable regulations.

Owner's Representative shall inspect the removal work and work area upon its completion to ensure that all visible lead-containing paint chips and residue have been removed. The Contractor SHALL NOT PROCEED with other work involving the building site until such time as a final visual inspection has been conducted and the work and degree of cleanliness accepted by Owner's Representative.

Prior to commencing work operations, Owner's Representative may collect baseline dust wipe samples and submit for analysis by accredited laboratory as to lead content. Sampling locations shall be plotted on site plan.

Following completion of renovation operations, Owner's Representative may collect post renovation dust wipe samples as a condition of acceptance of work. If post renovation wipe samples document that lead levels in settled dust within areas affected by the specified demolition operations are above regulatory levels, Contractor shall reclean affected areas as directed by Owner's Representative. Contractor shall be responsible for cost of cost of additional remediation and cleaning work as directed by Owner's Representative based on failure of initial lead clearance event, and cost associated with all subsequent clearance events until such time that clearance sample results document that lead levels in settled dust are below regulatory levels and the requirements of these specifications.

All inspections and/ or re-inspections by Owner's Representative shall be scheduled by the Contractor at least twenty-four (24) working hours in advance.

Owner's Representative will inspect the facilities as necessary, to ensure compliance with these specifications.

Owner's Representative is not limited by the inspection requirements as noted above; additional safety and health inspections by Owner's Representative may occur randomly, and in a manner to determine compliance with applicable laws and project design documents.

3.04 PREPARATION OF WORK AREA

Work Area: Preparation

Contractor shall place 6 mil. plastic sheeting on ground around base of each structure prior to commencing work involving removal of loose or damaged paint chips, or removal of building elements with lead-based paint prior to renovation/demolition operations.

Signage: The Contractor shall post signs immediately outside all entrances and exits to the work area. Identical signage shall be posted in both English and Spanish.

1. The Contractor shall keep the signs posted until Owner's Representative notifies the Contractor the specific area has successfully passed final visual inspection as herein defined.
2. The Contractor shall insure that the signage required meets the following description:
 - a. The sign is at least 20" by 14" and states the date and place of the lead abatement project:
 - b. The sign includes the phrase, "Caution - Lead Hazard, Keep Out" in bold lettering at least two inches high. Signage required by any regulatory agency having jurisdiction shall be posted at required locations.

3.05 LEAD DISTURBANCE SHALL NOT COMMENCE UNTIL:

The Lead Work Plan, and all required submittals and notices have been reviewed and approved by Owner's.

Storage location at facility will be designated for temporary storage of lead paint chips and suspect lead-based paint containerized in steel drums with lockable lids

Arrangements have been made for containing and/or disposal of wastewater resulting generated from lead abatement activities.

Lockable dumpster or containers are inspected for leakage.

Tools, equipment, and material waste receptacles are on-site.

All respirators are on-site and fully operative.

A visitor and employee sign-in sheet shall be maintained at the job site. All persons entering the site will be required to sign-in.

3.06 CLEAN-UP PROCEDURES

General: When work involving the disturbance of lead is taking place, the work site shall be cleaned at the end of each day's activities. Prior to beginning lead control, all stored materials or equipment shall be either removed to a "clean area" or wrapped in polyethylene prior to start of the lead related work. A secure area shall be designated at the site by Building Owner's Representative. The area shall be designated for storage of detached lead containing paint chips and contaminated articles until it can be properly disposed of. Disposable supplies such as mop heads, sponges, and rags shall be replaced regularly and disposed of according to the contract documents. Durable equipment, such as power and hand tools, generators, and vehicles shall be cleaned regularly. All equipment shall be cleaned by HEPA vacuuming and high-phosphate detergent washing.

All clean-up procedures, as described herein, will be completed before the removal of the 6-mil thick area containment plastic sheeting on vents, as well as doorways to hallways and common areas.

Clean-Up Methods and Equipment: Areas in which operations involving disturbance of lead have been completed shall be cleaned, by vacuum cleaning using a high efficiency particulate

air (HEPA) vacuum, followed by a wet cleaning with high-phosphate detergent wash. The Contractor may use a garden sprayer or equivalent to wet all surfaces with a 5% to 10% cleaning solution. After spraying the surface, a wet and dry HEPA vacuum shall be used to vacuum the water from the surface.

High Efficiency Particulate Air (HEPA) Vacuum: The Contractor will obtain training in the use of the HEPA vacuum from the manufacturer prior to use. The Contractor shall obtain HEPA vacuum attachments, such as various sized brushes, crevice tools and angular tools to be used for varied application, and service the HEPA vacuum routinely to assure proper operation. Caution shall be taken any time the HEPA is opened for filter replacement or debris removal. Operators shall wear a full set of protective clothing and equipment, including Respirators when using the HEPA vacuuming equipment.

The Contractor shall retain the services of a testing laboratory to conduct representative sampling of wastewater (if any). Water which meets the local standards of the Regional Water Quality Control Board may be filtered and disposed of into the storm drain system after being filtered through a four (4) micron filtering system. Water which contains over the allowable content of lead shall be disposed of as RCRA waste at the Contractors expense.

Removal of Plastic Sheeting: Plastic sheeting (if used) covering any floor surface shall be sprayed, picked up, and HEPA-vacuumed prior to removal. The plastic sheeting shall be carefully folded from the corners and ends toward the middle and placed into a double 4 mil or single 6 mil plastic bag and sealed. Bags shall be stored in the designated area and disposed of according to the specifications.

Final Clean-up and Inspection: The Contractor shall begin final clean-up after completion of all renovation related work. The entire area shall be inspected for evidence of loose, detached paint chips and paint residue. All visible paint chips and paint residue shall be HEPA-vacuumed. No dry sweeping is allowed.

No statements in this section are meant to relieve the Contractor of his responsibility to meet the final clean-up criteria as established by these contract documents or any other applicable laws or regulations.

3.07 CLEARANCE TESTING AND STANDARDS

Following completion of the renovation operation the Owner's Representative may collect representative clearance dust wipe samples at each specified building site location. Samples shall be submitted to an accredited laboratory for analysis as to lead content in accordance with these specifications.

Dust wipe samples will be analyzed by a qualified laboratory utilizing atomic absorption spectroscopy.

Owner's Representative shall submit the test results indicating that the lead levels in the settled dust are below that allowable by the regulatory agencies. The following clearance levels shall apply:

1. Interior Settled Dust On Floors: Below 10 ug/ft.²

2. Interior Window Sills (Stool): <100 ug/ft.²
3. Exterior Floors and Raised Horizontal Surfaces: 400 ug/ft.²

If the test results indicate higher levels, the Contractor shall reclean each area represented by the results as directed by Owner's Representative sufficient to reduce lead required levels. Contractor shall not request additional compensation for additional work related to re-cleaning areas which fail to meet prescribed clearance levels. In addition, Contractor is responsible for all costs associated with additional clearance episodes based on failing clearance at any location.

Contractor shall be responsible for all costs associated with delays, stoppages, and all costs associated with failure to meet clearance criteria for the initial sampling round per work area. Costs may include cost of repeating clearance sampling, laboratory costs, shipping, cost of Owner's Representative, and all incidental costs.

3.08 DISPOSAL OF LEAD WASTE MATERIAL

For bid purposes Contractor shall dispose of all detached lead containing paint, lead-containing dust, building elements with non-intact paint, chemical stripper, and articles contaminated by chemical stripper as RCRA waste.

Contractor shall perform all required testing to determine appropriate disposal of contaminated clothing, respirators, polyethylene, tape, P.P.E. and other contaminated articles or treat them as RCRA waste. Costs for sample collection and analysis by an accredited laboratory shall be included in the Contractors bid for the work.

For bid purposes all building elements with intact lead-based paint or lead-containing paint shall be disposed of as general construction debris. The Contractor shall comply with requirements of landfill for acceptance of lead-containing construction debris.

All lead contaminated wastewater shall be filtered and placed into steel drums. The Contractor shall retain the services of a testing laboratory to conduct representative sampling of wastewater. Water which meets the standards of the local Regional Water Quality Control Board, in addition to state and federal laws pertaining to water quality may be filtered and disposed of into storm drains. Water which contains over the allowable content of lead shall be disposed of as RCRA waste at Contractors expense.

END OF SECTION

SECTION 09 68 13

TILE CARPETING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes modular carpet tile.
- B. Related Sections include:
 - 1. Section 01 74 19 "Construction Waste Management and Disposal" for recycling of existing carpet materials to be removed.
 - 2. Section 02 41 19 "Selective Demolition" for removal of existing floor coverings.
 - 3. Section 09 05 65 "Concrete Moisture-Control System" for moisture-vapor-emission control system applied to concrete slab substrates prior to installation of finish flooring.
 - 4. Section 09 65 13 "Resilient Base and Accessories" for the following resilient products used with carpet tile:
 - a. Resilient base.
 - b. Resilient transition moldings between carpet tile and adjacent finish flooring materials.

1.3 REFERENCES

- A. American Association of Textile Chemists and Colorists (AATCC):
 - 1. AATCC 16-E: Test Method for Colorfastness to Light.
 - 2. AATCC 134: Test Method for Electrostatic Propensity of Carpets.
 - 3. AATCC 165: Test Method for Colorfastness to Crocking, Textile Floor Coverings.
 - 4. AATCC 174: Test Method for Antimicrobial Activity Assessment of Carpets.
 - 5. AATCC 175: Test Method for Stain Resistance for Pile Floor Coverings.

- B. ASTM International:
 - 1. ASTM E 648: Standard Test Method for Critical Radiant Flux of Floor-Covering Systems Using a Radiant Heat Energy Source.
 - 2. ASTM E 662: Standard Test Method for Specific Optical Density of Smoke Generated by Solid Materials.
 - 3. ASTM E 2471: Standard Test Method for Using Seeded-Agar for the Screening Assessment of Antimicrobial Activity in Carpets.
 - 4. ASTM F 710: Standard Practice for Preparing Concrete Floors to Receive Resilient Flooring.
 - 5. ASTM F 2170: Standard Test Method for Determining Relative Humidity in Concrete Floor Slabs Using in situ Probes.
- C. California Department of Public Health (CDPH):
 - 1. Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers – Version 1.1, February 2010.
- D. CALGreen: California Green Building Standards Code - California Code of Regulations, Title 24, Part 11.
- E. Carpet and Rug Institute (CRI):
 - 1. CRI Carpet Installation Standard.
 - 2. CRI Green Label Plus testing program.
- F. Chemical Abstract Service (CAS):
 - 1. Chemical Abstract Registration Number (CASRN).
- G. Collaborative for High Performance Schools (CHPS).
 - 1. Criteria Interpretation Library.
 - a. EQ 7.0 – Low Emitting Materials.
 - b. EQ 7.1 – Additional Low Emitting Materials.
- H. Cradle to Cradle Products Innovation Institute:
 - 1. Cradle to Cradle Certified Product Standard.
- I. European Standards (EN):
 - 1. EN 15804: Sustainability of Construction Works – Environmental Product Declarations – Core Rules for the Product Category of Construction Products.
- J. GreenScreen for Safer Chemicals:
 - 1. GreenScreen Chemical Hazard Assessment Procedure V1.2.
- K. Health Product Declaration Collaborative:
 - 1. Health Product Declaration Open Standard.

- L. International Certified Floorcovering Installers Association.
 - 1. Commercial II certification level.
- M. International Organization for Standardization (ISO):
 - 1. ISO 14021: Environmental Labels and Declarations – Self-Declared Environmental Claims (Type II Environmental Labeling).
 - 2. ISO 14025: Environmental Labels and Declarations – Type III Environmental Declarations – Principals and Procedures.
 - 3. ISO 14040: Environmental Management – Life Cycle Assessment – Principals and Framework.
 - 4. ISO 14044: Environmental Management – Life Cycle Assessment – Requirements and Guidelines.
 - 5. ISO 21930: Sustainability in Building Construction – Environmental Declaration of Building Products.
- N. NSF International/American National Standards Institute (ANSI):
 - 1. NSF/ANSI 140: Sustainability Assessment for Carpet.
- O. Registration, Evaluation, Authorization and Restriction of Chemicals (REACH).
- P. SCS Global Services:
 - 1. Sustainable Carpet Certification.
- Q. South Coast Air Quality Management District (SCAQMD):
 - 1. Rule 1168 – Adhesive and Sealant Applications.

1.4 DEFINITIONS

- A. VOC: Volatile Organic Compounds.

1.5 PREINSTALLATION MEETINGS

- A. Preinstallation Conference: Conduct conference at Project site.
 - 1. Review methods and procedures related to carpet tile installation including, but not limited to, the following:
 - a. Delivery, storage, and handling procedures.
 - b. Ambient conditions and ventilation procedures.
 - c. Subfloor preparation procedures.

1.6 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include manufacturer's written data on physical characteristics, durability, and fade resistance.
 - 2. Include manufacturer's written installation recommendations for each type of substrate.

- B. Shop Drawings: For carpet tile installation, plans showing the following:
1. Columns, doorways, enclosing walls or partitions, built-in cabinets, and locations where cutouts are required in carpet tiles.
 2. Existing flooring materials to be removed.
 3. Existing flooring materials to remain.
 4. Carpet tile type, color, and dye lot.
 5. Type of subfloor.
 6. Type of installation.
 7. Pattern of installation.
 8. Pattern type, location, and direction.
 9. Pile direction patterns.
 10. Types, color, and locations of insets and borders.
 11. Type, color, and location of edge, transition, and other accessory strips.
 12. Transition details to other flooring materials.
- C. Samples for Initial Selection: Submit manufacturer's full range of colors/patterns for the following items for selection by Architect.
1. Carpet Tile.
 - a. Minimum Number of Color/Patterns for Selection:
 - i) Carpet Tile 1 – “**C-1**”; Walk-Off Mat:.
 - ii) Carpet Tile – “**C-2**”; Field: .
- D. Samples for Verification: For each of the following products and for each color and texture required. Label each Sample with manufacturer's name, material description, color, pattern, and designation indicated on Drawings and in schedules.
1. Carpet Tile: Full-size Sample.
 2. Exposed Edge, Transition, and other Accessory Stripping: 12-inch long Samples.
- E. Product Schedule: For carpet tile. Use same designations indicated on Drawings.
- F. CALGreen Submittals:
1. Manufacturer's product data for adhesives and adhesive primers indicating compliance with product requirements specified in “CALGreen Requirements” Article.
 2. Manufacturer's product data for carpet tile indicating compliance with product requirements specified in “CALGreen Requirements” Article.

1.7 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer.
- B. Product Test Reports: For carpet tile, for tests performed by a qualified testing agency.
- C. Sample Warranties: For special warranties.

1.8 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For carpet tiles to include in maintenance manuals. Include the following:
 - 1. Methods for maintaining carpet tile, including cleaning and stain-removal products and procedures and manufacturer's recommended maintenance schedule.
 - 2. Precautions for cleaning materials and methods that could be detrimental to carpet tile.

1.9 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Carpet Tile: Full-size units equal to 5 percent of amount installed for each type indicated, but not less than 10 sq yds.

1.10 QUALITY ASSURANCE

- A. Installer Qualifications: An experienced Installer who is certified by the International Certified Floorcovering Installers Association at the Commercial II certification level.
- B. Mockups: Build mockups to verify selections made under Sample submittals, to demonstrate aesthetic effects, and to set quality standards for fabrication and installation.
 - 1. Build mockups at locations and in sizes as shown on Drawings or if not shown, as directed by Architect.
 - 2. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.11 DELIVERY, STORAGE, AND HANDLING

- A. Comply with CRI's "CRI Carpet Installation Standard."

1.12 FIELD CONDITIONS

- A. Comply with CRI's "CRI Carpet Installation Standard" for temperature, humidity, and ventilation limitations.
- B. Environmental Limitations: Do not deliver or install carpet tiles until spaces are enclosed and weathertight, wet work in spaces is complete and dry, and ambient temperature and humidity conditions are maintained at occupancy levels planned for building occupants during the remainder of the construction period.
- C. Do not install carpet tiles over concrete slabs until slabs have cured and are sufficiently dry to bond with adhesive and concrete slabs have pH range recommended by carpet tile manufacturer.
- D. Where demountable partitions or other items are indicated for installation on top of carpet tiles, install carpet tiles before installing these items.

1.13 WARRANTY

- A. Special Warranty for Carpet Tiles: Manufacturer agrees to repair or replace components of carpet tile installation that fail in materials or workmanship within specified warranty period.
 - 1. Warranty does not include deterioration or failure of carpet tile due to unusual traffic, failure of substrate, vandalism, or abuse.
 - 2. Failures include, but are not limited to, the following:
 - a. More than 10 percent loss of face fiber, edge raveling, snags, and runs.
 - b. Dimensional instability.
 - c. Loss of tuft-bind strength.
 - d. Excess static discharge.
 - e. Loss of face fiber.
 - f. Delamination
 - 3. Warranty Period: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 CALGREEN REQUIREMENTS

- A. General: Conform with all applicable requirements of the California Green Building Standards Code (CALGreen).
- B. Provide adhesives and adhesive primers which comply with current VOC content limits of the South Coast Air Quality Management District (SCAQMD) Rule 1168, except as noted otherwise below. Such products shall also comply with Rule 1168 prohibition of the use of certain toxic compounds (chloroform, ethylene, dichloride, methylene chloride, perchloroethylene, and trichloroethylen).
 - 1. Aerosol adhesives and similar unit sizes of adhesives, and sealants (in units of product, less packaging, which do not weigh more than one pound and do not consist of more than 16 fluid ounces) shall comply with statewide VOC standards and other requirements, including prohibitions of use of certain toxic compounds, of the California Code of Regulations, Title 17, commencing with Section 94507.
- C. Carpet Tile: Provide carpet tile products which meet at least one of the following:
 - 1. Certified as complying with the testing and product requirements of the Carpet and Rug Institute's Green Label Plus program.
 - 2. Compliant with the VOC-emission limits specified in the California Department of Public Health Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers, Version 1.1, February 2010.
 - 3. Meets requirements of NSF/ANSI 140 for certification at the Gold level or higher.
 - 4. Meets requirements of SCS Global Services Sustainable Carpet Certification program at the Gold level or higher.
 - 5. Compliant with 2014 California Collaborative for High Performance Schools California (CA-CHPS) Criteria Interpretation for EQ 7.0 and EQ 7.1 (formerly EQ 2.2) and listed in the CHPS High Performance Database.

2.2 PERFORMANCE REQUIREMENTS

- A. Fire-Test-Response Characteristics for Tile Carpeting:
 - 1. Critical Radiant Flux Classification: Class I, not less than 0.45 W/sq cm, as determined by testing identical products according to ASTM E 648.
 - 2. Smoke Density: 450 or less, determined by testing identical products according to ASTM E 662.

2.3 CARPET TILE

- A. Modular Carpet Tile **C-1; Walk-Off Mat**: Modular carpet tile system designed for specific installation per manufacturer's recommendations. Maintain a visually continuous and finished overall appearance without any tile appearing improperly positioned.
1. Product: **Interface, Inc.; SR799**.
 - a. Color: Onyx
 2. Construction: Tufted Textured Loop
 3. Fiber Content: 100 percent nylon.
 4. Fiber Type: Aquafil.
 5. Dye Method: 100 percent solution dyed.
 6. Pile Characteristic: Tip-sheared.
 7. Pile Height: .19 inch.
 8. Stitches: 10 per inch.
 9. Gage: 1/12 inch.
 10. Face Yarn Weight: 26 oz per sq yd.
 11. Density: 6,686 oz per cu yd.
 12. Primary Backing/Backcoating: Non-woven fiberglass-reinforced PVC.
 13. Secondary Backing: Fiberglass-reinforced thermoplastic composite; 100 percent recyclable.
 - a. Provide minimum 39 percent recycled content, post-consumer or post-industrial in secondary backing material.
 14. Size: 19.6 inches square.
 15. Applied Soil-Resistance Treatment: Manufacturer's standard material; 8.0 on the Red 40 Stain Scale, per AATCC 175.
 16. Antimicrobial Treatment: Manufacturer's standard material; passes AATCC 174 (minimum 90 percent reduction of microorganisms according to Part 2; no macroscopic growth according to Part 3); passes ASTM E 2471.
 17. Performance Characteristics: As follows:
 - a. Colorfastness to Crocking: Not less than 4, wet and dry, per AATCC 165.
 - b. Colorfastness to Light: Not less than 4 after 60 AFU (AATCC fading units) per AATCC 16, Option E.
 - c. Electrostatic Propensity: Less than 3.0 kV per AATCC 134.
 18. Minimum Recycled Content:
 - a. Preconsumer: 33 percent.
 - b. Postconsumer: 33 percent.
 19. VOC Emissions:
 - a. Complies with requirements specified in "CALGreen Requirements" Article.
 - b. Certification: CRI Green Label Plus.

- B. Modular Carpet Tile ***C-2; Field***. Modular carpet tile system designed for specific installation per manufacturer's recommendations. Maintain a visually continuous and finished overall appearance without any tile appearing improperly positioned.
1. Product: ***Interface, Inc.; Cubic***.
 - a. Color: T.B.D.
 2. Construction: Tufted.
 3. Fiber Content: 100 percent nylon Type 6, 6.
 4. Fiber Type: Aquafil.
 5. Dye Method: 100 percent solution dyed.
 6. Pile Characteristic: Textured loop.
 7. Pile Height: .145 inch.
 8. Stitches: 8.16 per inch.
 9. Gage: 1/12 inch.
 10. Face Yarn Weight: 18 oz per sq yd.
 11. Density: 6,968 oz per cu yd.
 12. Primary Backing/Backcoating: Non-woven fiberglass-reinforced PVC.
 13. Secondary Backing: Fiberglass-reinforced thermoplastic composite; 100 percent recyclable.
 - a. Provide minimum 39 percent recycled content, post-consumer or post-industrial in secondary backing material.
 14. Size: 50 cm by 50 cm (19.69 inches square).
 15. Applied Soil-Resistance Treatment: Manufacturer's standard material; 8.0 on the Red 40 Stain Scale, per AATCC 175.
 16. Antimicrobial Treatment: Manufacturer's standard material; passes AATCC 174 (minimum 90 percent reduction of microorganisms according to Part 2; no macroscopic growth according to Part 3).
 17. Performance Characteristics: As follows:
 - a. Colorfastness to Crocking: Not less than 4, wet and dry, per AATCC 165.
 - b. Colorfastness to Light: Not less than 4 after 60 AFU (AATCC fading units) per AATCC 16, Option E.
 - c. Electrostatic Propensity: Less than 3.0 kV per AATCC 134.
 18. Minimum Recycled Content:
 - a. Preconsumer: 45 percent.
 19. VOC Emissions:
 - a. Complies with requirements specified in "CALGreen Requirements" Article.
 - b. Certification: CRI Green Label Plus.

2.4 INSTALLATION ACCESSORIES

- A. Trowelable Leveling and Patching Compounds: Latex-modified, hydraulic-cement-based formulation provided or recommended by carpet tile manufacturer.
- B. Primer/Sealer: Carpet manufacturer's standard sealer material designed to seal gypsum-based underlayment surfaces.
- C. Corner Connectors: Manufacturer's standard adhesively-surfaced 3-inch by 3-inch square tabs for connecting underside of corners of four adjacent carpet tile units to maintain a tight joint on all sides of tile, thereby maintaining an overall stable surface. Tabs are surfaced with pressure-sensitive acrylic adhesive on one side, only, of polyester backing, so as not to adhere tiles to substrate.
 - 1. Product: Interface, Inc.; TacTiles.
- D. Adhesives: Water-resistant, mildew-resistant, nonstaining, pressure-sensitive type to suit products and subfloor conditions indicated, that complies with flammability requirements for installed carpet tile and is recommended by carpet tile manufacturer for releasable installation.
 - 1. VOC Content: Complies with requirements specified in "CALGreen Requirements" Article.
- E. Resilient Transition Moldings: As specified in Section 09 65 13 "Resilient Base and Accessories."

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for maximum moisture content, alkalinity range, installation tolerances, and other conditions affecting carpet tile performance.
- B. Examine carpet tile for type, color, pattern, and potential defects.
- C. Verify that substrates are free of cracks, ridges, depressions, scale, and foreign deposits that might show through surface or interfere with adhesion of carpet tile and accessories
- D. For painted subfloors, perform bond test recommended in writing by adhesive manufacturer.
- E. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. General: Comply with CRI's "CRI Carpet Installation Standard," and with carpet tile manufacturer's written installation instructions for preparing substrates indicated to receive carpet tile.
- B. Concrete substrates: Prepare according to ASTM F 710.
 - 1. Remove coatings, including curing compounds, and other substances that are incompatible with adhesives and that contain soap, wax, oil, or silicone, without using solvents. Use mechanical methods recommended in writing by adhesive and carpet tile manufacturer.
 - 2. Refer to Section 09 05 65 "Concrete Moisture-Control System" for moisture and alkalinity testing and treatment. Proceed with installation only after substrates pass testing.
 - 3. Adhesion Testing: Perform tests recommended by carpet tile manufacturer. Proceed with installation only after substrates pass testing.
- C. Metal Substrates: Clean grease, oil, soil, and rust, and prime if recommended in writing by adhesive manufacturer. Rough sand painted metal surfaces and remove loose paint. Sand aluminum surfaces, to remove metal oxides, immediately before applying adhesive.
- D. Use trowelable leveling and patching compounds, according to manufacturer's written instructions, to fill cracks, holes, depressions, and protrusions in substrates. Fill or level cracks, holes, and depressions 1/8 inch wide or wider, and protrusions more than 1/32 inch, unless more stringent requirements are required by manufacturer's written instructions.
- E. Apply primer/sealer over gypsum-based cementitious underlayment in accordance with carpet manufacturer's written instructions and as required to ensure proper adhesion of carpet to underlayment surface.
- F. Broom and vacuum clean substrates to be covered immediately before installing carpet tile.

3.3 CARPET TILE INSTALLATION

- A. General: Comply with with CRI's "Carpet Installation Standard," Section 18, "Modular Carpet," and with carpet tile manufacturer's written installation instructions.
- B. Installation Method: As recommended in writing by carpet tile manufacturer, and as follows:
 - 1. TacTiles
- C. Maintain dye lot integrity. Do not mix dye lots in same area.
- D. Maintain carpet tile patterns indicated on Drawings.
- E. Cut and fit carpet tile to butt tightly to vertical surfaces, permanent fixtures, and built-in furniture including cabinets, pipes, outlets, edgings, thresholds, and nosings. Bind or seal cut edges as recommended by carpet tile manufacturer.
- F. Extend carpet tile into toe spaces, door reveals, closets, open-bottomed obstructions, removable flanges, alcoves, and similar openings.
- G. Maintain reference markers, holes, and openings that are in place or marked for future cutting by repeating on finish flooring as marked on subfloor. Use nonpermanent, nonstaining marking device.
- H. Install pattern parallel to walls and borders.
- I. Do not bridge building expansion joints with carpet tiles.
- J. At access flooring, stagger joints of carpet tiles so carpet tile grid is offset from access flooring panel grid. Do not fill seams of access flooring panels with carpet adhesive; keep seams free of adhesive.
- K. Resilient Molding Accessories: Butt to adjacent materials and tightly adhere to substrates throughout length of each piece. Install reducer strips at edges of carpet tiles that would otherwise be exposed.

3.4 CLEANING AND PROTECTION

- A. Perform the following operations immediately after installing carpet tile.
 - 1. Remove excess adhesive and other surface blemishes using cleaner recommended by carpet tile manufacturer.
 - 2. Remove yarns that protrude from carpet tile surface.
 - 3. Vacuum carpet tile using commercial machine with face-beater element.
- B. Protect installed carpet tile to comply with CRI's "CRI Carpet Installation Standard," Section 20, "Protecting Indoor Installations."
- C. Protect carpet tile against damage from construction operations and placement of equipment and fixtures during the remainder of construction period. Use protection methods indicated or recommended in writing by carpet tile manufacturer.

END OF SECTION 09 68 13

FIRE EXTINGUISHERS, CABINETS, AND ACCESSORIES

DIVISIONS 00 AND 01 ARE A PART OF THIS SECTION

PART 1 GENERAL

1.01 SCOPE OF WORK

The scope of work under this Section of the Specifications is intended to include labor, materials, tools, equipment, etc., for the complete installation of the fire extinguishers, cabinets, and accessories as shown on the Drawings and/or specified herein.

1.02 WORK INCLUDED

- a. Fire extinguishers
- b. Accessories

1.03 RELATED WORK

- a. Painting: Field paint finish-Section 09 91 00
- b. Carpentry- Section 06 10 00

1.04 REFERENCES

NFPA 10 Portable Fire Extinguishers, U.F.C. Std., T-19

1.05 QUALITY ASSURANCE

Conform to NFPA 10 requirements for extinguishers, U.F.C. Std., T-19.

1.06 SUBMITTALS

- a. Submit product data under per Section 01 33 00 and Article 14, Section 10.
- b. Include physical dimensions, operational features, color, and finish, wall mounting brackets with mounted measurements, anchorage details, rough-in measurements, location, and details.
- c. Submit manufacturer's installation instructions per Section 01 33 00.

1.07 OPERATION AND MAINTENANCE DATA

- a. Submit manufacturer's operation and maintenance data per DIV.00 Section 10.
- b. Include test, refill or recharge schedules, procedures, and re-certification requirements.

1.08 ENVIRONMENTAL REQUIREMENTS

Do not install extinguishers when ambient temperatures may cause freezing.

PART 2 PRODUCTS

2.01 ACCEPTABLE MANUFACTURERS

- a. J. L. Industries
- b. Larsen's Manufacturing Company
- c. Or approved equal. Substitutions per Article 19, Section 10.

2.02 MATERIALS

- a. Fire extinguishers shall typically be Cosmic 5X ABC Dry Chemical 5lbs (2A 10BC Rating), dry chemical, and shall be mounted 48" above finish floor to center of handle.
- b. Mounting brackets: MB818C for Cosmic 5X and shall be mounted 48" above finish floor to center of handle.

PART 3 EXECUTION

3.01 INSPECTION

- a. Verify location is correct.
- b. Beginning of installation means acceptance of existing conditions.

3.02 INSTALLATION

- a. Install fire extinguishers plumb and level on wall openings such that operating device is 48" above finish floor to center of handle.
- b. Secure with brackets (2) 1/4"-14x3" Philips wafer head self-drilling screws per bracket.

END OF SECTION

6/10/2020

ASPHALTIC CONCRETE

DIVISIONS 00 AND 01 ARE A PART OF THIS SECTION

PART 1 GENERAL

1.01 SCOPE OF WORK

The work of this Section shall include all labor, material, equipment, and appliances required to complete all the work shown on the drawings and/or specified hereunder.

1.02 WORK INCLUDED

- a. Rolling and preparing the finish sub-grade to receive asphaltic concrete.
- b. Laying of aggregate base and paving with asphaltic concrete of all areas as indicated on the drawings.
- c. Redwood header boards around the areas to be paved with asphaltic concrete unless otherwise noted.
- d. Fog seal.

1.03 RELATED WORK

- a. Vegetation control is specified under Section 32 05 13.02.
- b. Finish grading is specified under Earthwork, Section 31 20 00; however, rolling preparation of finish grade under asphalt paving is part of this contract.

1.04 GUARANTEE

In addition to the guarantee as specified elsewhere in these Specifications, this Contractor shall repair or restore to first class condition any portion of the asphaltic concrete paving in which creeping, shoving, cracking, raveling, softening or other defects that are due to improper placing or defective materials that appear or become apparent within one (1) year from the date of acceptance.

PART 2 PRODUCTS

2.01 MATERIALS

- a. Hot-Mix Asphaltic Concrete, Type "B", uniformly graded aggregate to 1/2" maximum medium grading, graded as per State of California Division of Highways, Standard Specifications Section 39 and intimately mixed with 5 - 6-1/2% Asphalt. Asphalt shall be Performance Grade PG64-10. No R.A.P. (Reclaimed Asphalt Pavement) shall be used.
- b. Redwood: All heart foundation grade redwood.
- c. Redwood Headers: 3x6 redwood.

- d. Aggregate Base: Class 2, 3/4" aggregate graded as per State of California Division of Highways, Standard Specifications, Section 26.
- e. Fog Seal: Asphalt emulsion SS-1/SS-1h mixed with water 1:1.

PART 3 EXECUTION

3.01 INSPECTION

- a. Verify gradients and elevations of sub base are correct.
- b. Beginning of installation means acceptance of substrate.

3.02 TOLERANCES

- a. Flatness: Maximum variation of 1/4 inch, measured with 10-foot straight edge.
- b. Compacted Scheduled Thickness: Within 1/4 inch of design thickness.
- c. Variation from True Elevation: Within 1/2 inch.

3.03 INSTALLATION

- a. Preparation of Grade: All base over which asphaltic concrete is to be placed shall be rolled with a three (3) to five (5) ton roller, making seven (7) passes over all of the areas to receive asphaltic concrete.
- b. Paving for Vehicular Traffic: Asphaltic concrete and aggregate base shall be placed to thicknesses shown on the plans. Asphalt concrete shall be placed and compacted in accordance with Section 39 and base material shall be spread and compacted in accordance with Section 26 of the State of California, Division of Highways Standard Specifications. The finish shall have no variations greater than one-quarter inch (1/4") in ten feet (10'-0") and the texture of finish shall be uniform and at a maximum density for the type of aggregate used.
- c. Header boards: Unless otherwise noted, place redwood header boards around the areas to be paved with asphaltic concrete. To secure the header boards, use 1" x 4" x 1'-6" long redwood stakes at four feet (4'-0") on center.
- d. Fog Seal: Spray the entire area after the paving is completed at a rate of approximately 0.1 gallon per square yard as per Section 37 of the State specifications.

3.04 GENERAL REQUIREMENTS

- a. Layout of Work: This contractor shall lay out his work and be responsible for the accuracy of the measurements.
- b. Cooperation: This contractor shall cooperate with the other trades in establishing the time of commencing and completing the work of this section.
- c. Approvals: The material source from which asphaltic concrete is procured shall be approved by the Architect.

- d. Protection of Other Work: Care shall be taken to prevent damage to existing property, concrete slabs and to any of the new work performed under the contract and shall make good any damage resulting from this operation.
- e. Inspection of Site: This contractor shall be held to have examined the site and satisfied himself to the existing conditions and the conditions under which he will be obliged to operate.

END OF SECTION
05/15/2008