


GIRLS RESTROOM, BUILDING E

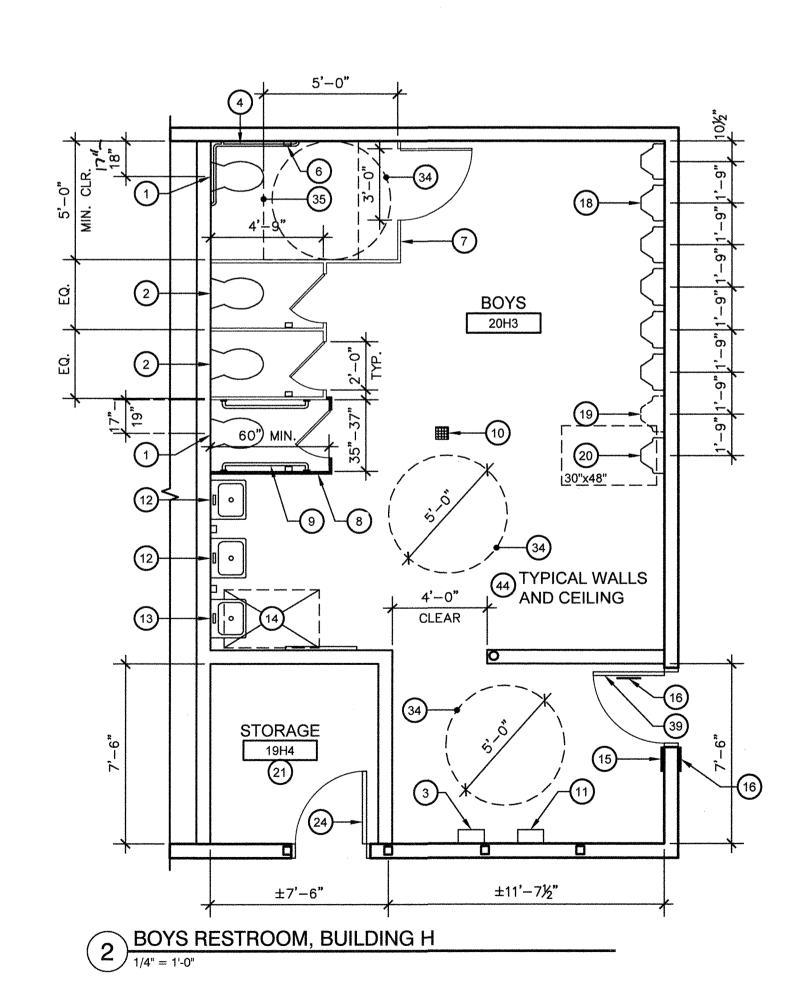

SCALE: AS NOTED

KEY NOTES

- EXISTING TOILET. REMOVE AND REPLACE WITH NEW ADA ACCESSIBLE MODEL. SEE SPECS
- EXISTING TOILET TO REMAIN. NO WORK
- EXISTING ELECTRIC HAND DRYER TO REMAIN. NO
- EXISTING CONTINUOUS ADA GRAB BAR. VERIFY DIMENSIONAL COMPLIANCE WITH 2/A7.01. MODIFY AS NECESSARY
- EXISTING CONTINUOUS ADA GRAB BAR TO REMAIN. NO WORK
- RELOCATE EXISTING TOILET PAPER AND SEAT COVER DISPENSERS TO COMPLY WITH 2/A7.01
- EXISTING TOILET PARTITION TO REMAIN. VERIFY AND UPGRADE HARDWARE AT ACCESSIBLE STALL, AS
- NECESSARY, PER 4/A7.01 REPLACE PORTION OF EXISTING TOILET PARTITION PANELS AND DOOR WITH NEW IN NEW LOCATION, AS

DIMENSIONED, TO CREATE AMBULATORY ACCESSIBLE

- NEW 42" MIN. GRAB BAR AT AMBULATORY ACCESSIBLE STALL, TYPICAL BOTH SIDES
- 10. EXISTING FLOOR DRAIN TO REMAIN. NO WORK
- 1. EXISTING PAPER TOWEL DISPENSER TO REMAIN. VERIFY MOUNTING HEIGHT FOR ADA COMPLIANCE
- 12. EXISTING LAVATORY TO REMAIN. NO WORK
- 13. EXISTING LAVATORY, VERIFY ADA COMPLIANCE WITH 9/A7.01. MODIFY AS NECESSARY
- 14. VERIFY EXISTING 30"x48" ADA CLEAR FLOOR SPACE A LAVATORY PER 9/A7.01
- 15. NEW TACTILE EXIT SIGN PER 2A/A1.03
- 16. NEW ACCESSIBLE RESTROOM SIGNAGE PER 1/A7.01
- 7. NEW ACCESSIBLE RESTROOM DIRECTIONAL SIGNAGE PER 11/A1.03
- 18. EXISTING URINAL TO REMAIN. NO WORK
- 19. REMOVE EXISTING URINAL TO OBTAIN ADA CLEAR FLOOR AREA AT ADJACENT URINAL. CAP PIPES IN WALL AND PATCH TILE TO MATCH EXISTING
- 20. EXISTING FLOOR MOUNTED URINAL, VERIFY ADA COMPLIANCE PER 2/A7.01
- 21. EXISTING ROOM TO REMAIN. NO WORK
- 22. EXISTING WALL SUBSTRATE TO BE PATCHED AND REPLACED IN KIND AFTER INSTALLATION OF NEW FIXTURES. INSTALL NEW FRP SURFACE, AS SHOWN, PRIOR TO INSTALLATION OF NEW OR RELOCATED
- 3. EXISTING DOOR. REVERSE SWING AND REINSTALL. INSTALL NEW ADA HARDWARE. PATCH AND PAINT EXISTING FRAME
- 24. EXISTING DOOR TO REMAIN. NO WORK
- 25. EXISTING ELECTRIC HAND DRYER. REMOVE AND REINSTALL IN PLACE AFTER INSTALLATION OF NEW
- B. EXISTING RESTROOM ACCESSORIES TO BE REMOVED
- 27. EXISTING LAVATORY TO BE REMOVED
- 28. EXISTING TOILET TO BE REMOVED
- 29. EXISTING CONTINUOUS GRAB BAR TO BE REMOVED
- 30. NEW ADA ACCESSIBLE LAVATORY PER 9A/7.01
- NEW ADA ACCESSIBLE TOILET PER 2/A7.01
- 3. NEW 42" MIN. ADA GRAB BAR PER 6/A7.01
- 5. 60" W. x 48" D. MIN. MANEUVERING SPACE IN FRONT OF
- 36. 30" W. x 48" D. MIN. CLEAR FLOOR SPACE AT LAVATORY
- . NEW POSITION OF REINSTALLED PAPER TOWEL
- 8. NEW POSITION OF REINSTALLED SOAP DISPENSER

1. NEW POSITION OF TOILET PAPER DISPENSER

- 40. NEW POSITION OF REINSTALLED MIRROR
- 42. NEW POSITION OF SEAT COVER DISPENSER
- 43. 6" COVED BASE AT NEW SHEET VINYL FLOORING


GENERAL NOTES

- VERIFY HEIGHTS OF ALL RESTROOM ACCESSORIES FOR ADA COMPLIANCE. RELOCATE AS NECESSARY TO COMPLY WITH 3/A7.01
- FIELD VERIFY EXISTING DIMENSIONS SHOWN FOR ADA COMPLIANCE. NOTIFY ARCHITECT IMMEDIATELY OF ANY DISCREPANCIES

LEGEND

---- EXISTING ITEMS TO BE REMOVED

A2.01




SROOMS 7 SCHOOL

Ownership of Documents This document, the ideas and designs incorporated herein, as an instrument of

Professional Service is the property of Integrated Designs by SOMAM Inc.

and is not to be used, in whole or in part for any other project without written authorization

© COPYRIGHT 2015







5142